


т	۵	п	m	0

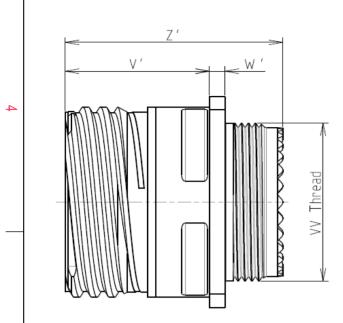

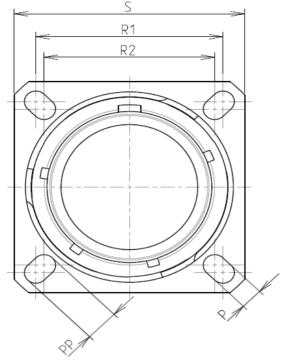



Keying Sł

CHARACTERISTICS

ω

 \sim

_

-Salt Spray

BASIC SERIES:

SHELL SIZE: 13

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite				
-Shell Plating	: Olive drab Cadmium				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy 0.8µm minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	-65℃ to +175℃				

: 2000 hours

8D 0

G

13

-

J

03

В

F

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
РР	4.93±0.2		
R1	23.01		
R2	20.62		
S	28.6±0.3		
V'	19.5+1.4/-0		
W'	2.1/3.65		
Z'	32 Max		
VV THREAD	M18x1-6g		

m	D	0	σ	Þ	
S R1 R2 C					4
\times $\circ \mathscr{M}$		LAYOUT SH	OWN AS EXAMPLE		3
Connector dimension Dim Nominal P 3.25±0.2 PP 4.93±0.2 R1 23.01 R2 20.62 S 28.6±0.3 V' 19.5+1.4/-0 W' 2.1/3.65 Z' 32 Max VV THREAD M18x1-6g	SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country Jurisdiction & Control List FR Not Listed				2
	PN: 8D013J03BB				
	A 14-10-2016 ISS DATE Designed By: TITLE	First Release Latest modification - by Date:	mposite Receptacle	CUSTOMER DRAWING	MOD N°
В	SCALE -	Gene	eral linear erances: ±	NPRDS / PROJECT 859	1
ORIENTATION : E CONTACT TYPE : SOCKET(500 Matings	SOURIAU	This document is the prop		ed or	
CONTACT LAYOUT : 13-03	FORMAT A3	SOURIAU DRG N° 8D013J03BB-C		SHEET 1/2	
E	D	С	B	A	

		۵	н г	m		0	
		Contact Layout				F	Panel Cutor
4		03 () () () () () () () () () () () () ()			ž	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Ctc A B C	13-03 X Y 2.39 1.47 0 -2.79 -2.39 1.47			<u>.</u>	Dim	ØT
ى ن						ØA ØAA R1 ØT	
	-					SOURIAU shall not be lia	able for an
						due to a use of the P the Specifications issued l (professional rec	Products wh by either o
N							Countr FR
						PN: 8	3D013.
					A 14-10-	2016 First Release	
					ISS DA Designed By:	TE Latest modification - by Date:	
					TITLE	Со	mposite
<u> </u>					SCALE NA		eral linear lerances: ±
					SOURI	AU WWW.SOU	RIAU.C
				_	FORMAT A3		URIAU D013J(
l	Н	G	F	E	D	С	

