

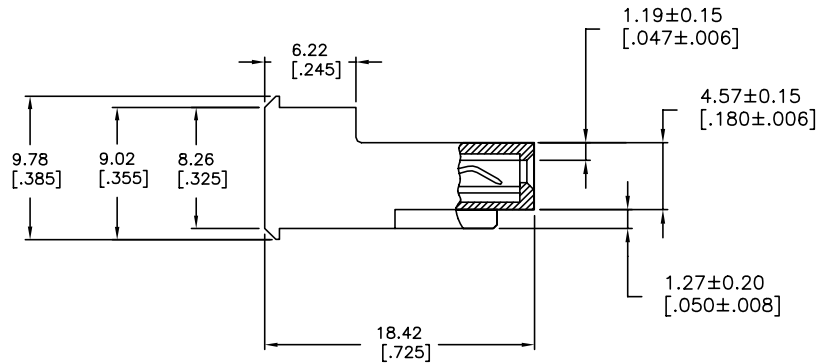


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - TE CONNECTIVITY ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
CM	54	P	LTN	DESCRIPTION	DATE	DWN	APVD
		W		REVISED PER ECR-20-000822	27MAY2020	PC	SW



DIM A	NO OF CIRCUITS	PART NO
95.10 [3.744]	24	5-640606-4
91.14 [3.588]	23	5-640606-3
87.17 [3.432]	22	5-640606-2
83.21 [3.276]	21	5-640606-1
79.25 [3.120]	20	5-640606-0
75.29 [2.964]	19	4-640606-9
71.32 [2.808]	18	4-640606-8
67.36 [2.652]	17	4-640606-7
63.40 [2.496]	16	4-640606-6
59.44 [2.340]	15	4-640606-5
55.47 [2.184]	14	4-640606-4
51.51 [2.028]	13	4-640606-3
47.55 [1.872]	12	4-640606-2
43.59 [1.716]	11	4-640606-1
39.62 [1.560]	10	4-640606-0
35.66 [1.404]	9	3-640606-9
31.70 [1.248]	8	3-640606-8
27.74 [1.092]	7	3-640606-7
23.77 [.936]	6	3-640606-6
19.81 [.780]	5	3-640606-5
15.85 [.624]	4	3-640606-4
11.89 [.468]	3	3-640606-3
7.92 [.312]	2	3-640606-2
95.10 [3.744]	24	2-640606-4
91.14 [3.588]	23	2-640606-3
87.17 [3.432]	22	2-640606-2
83.21 [3.276]	21	2-640606-1
79.25 [3.120]	20	2-640606-0
75.29 [2.964]	19	1-640606-9
71.32 [2.808]	18	1-640606-8
67.36 [2.652]	17	1-640606-7
63.40 [2.496]	16	1-640606-6
59.44 [2.340]	15	1-640606-5
55.47 [2.184]	14	1-640606-4
51.51 [2.028]	13	1-640606-3
47.55 [1.872]	12	1-640606-2
43.59 [1.716]	11	1-640606-1
39.62 [1.560]	10	1-640606-0
35.66 [1.404]	9	640606-9
31.70 [1.248]	8	640606-8
27.74 [1.092]	7	640606-7
23.77 [.936]	6	640606-6
19.81 [.780]	5	640606-5
15.85 [.624]	4	640606-4
11.89 [.468]	3	640606-3
7.92 [.312]	2	640606-2

- △ MATERIAL: CONNECTOR - NYLON UL94V-2 (RED).
CONTACTS - 0.30[.012] THICK COPPER ALLOY
(BRIGHT TIN-LEAD 0.00203[.000080] MIN. THICK
FOR CONTACTS 640606-2 THRU 2-640606-4)
(MATTE WHISKER MITIGATED TIN 0.00203[.000080] MIN
THICKNESS OVER NICKEL UNDERPLATE FOR
3-640606-2 THRU 5-640606-4).
- 2 CONTACTS ACCEPT 22 AWG WIRE WITH 2.41[.095] MAX INSULATION DIAMETER.
- 3 CONTACTS MUST ACCEPT 1.14±0.03[.045±.001] SQUARE POST AND REMAIN LOCKED IN POSITION.
- △ IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY NOT APPEAR ON ALL ASSEMBLIES.
- 5 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 6 HOUSING FEATURES ARE: FEED-THRU WITHOUT LOCKING RAMP.
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- △ OBSOLETE PARTS

SUPERSEDED △	95.10 [3.744]	24	2-640606-4
	91.14 [3.588]	23	2-640606-3
	87.17 [3.432]	22	2-640606-2
	83.21 [3.276]	21	2-640606-1
	79.25 [3.120]	20	2-640606-0
	75.29 [2.964]	19	1-640606-9
	71.32 [2.808]	18	1-640606-8
	67.36 [2.652]	17	1-640606-7
	63.40 [2.496]	16	1-640606-6
	59.44 [2.340]	15	1-640606-5
	55.47 [2.184]	14	1-640606-4
	51.51 [2.028]	13	1-640606-3
	47.55 [1.872]	12	1-640606-2
	43.59 [1.716]	11	1-640606-1
	39.62 [1.560]	10	1-640606-0
	35.66 [1.404]	9	640606-9
	31.70 [1.248]	8	640606-8
	27.74 [1.092]	7	640606-7
	23.77 [.936]	6	640606-6
	19.81 [.780]	5	640606-5
	15.85 [.624]	4	640606-4
	11.89 [.468]	3	640606-3
	7.92 [.312]	2	640606-2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. LEWIS 12FEB91	TE TE Connectivity																
DIMENSIONS: mm [INCHES]		CHK R. SWING 12FEB91																	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. CLARK 19FEB91	NAME																
<table border="1"> <tr><td>0 PLC</td><td>±</td><td>-</td></tr> <tr><td>1 PLC</td><td>±</td><td>-</td></tr> <tr><td>2 PLC</td><td>±</td><td>-</td></tr> <tr><td>3 PLC</td><td>±</td><td>0.13 [0.005]</td></tr> <tr><td>4 PLC</td><td>±</td><td>-</td></tr> </table>		0 PLC	±	-	1 PLC	±	-	2 PLC	±	-	3 PLC	±	0.13 [0.005]	4 PLC	±	-	PRODUCT SPEC 108-1051		MTA-156 CONNECTOR ASSEMBLY, 22 AWG, STANDARD
0 PLC	±	-																	
1 PLC	±	-																	
2 PLC	±	-																	
3 PLC	±	0.13 [0.005]																	
4 PLC	±	-																	
MATERIAL		APPLICATION SPEC 114-1020																	
FINISH		SIZE A2	CAGE CODE W	DRAWING NO C=640606															
CUSTOMER DRAWING		WEIGHT	RESTRICTED TO	SCALE 4:1 SHEET 1 of 1 REV W															