


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
AD	OO	P	LTR	DESCRIPTION	DATE	DWN	APVD
		A		ECO 06 000585	03AUG06	BSV	MZ

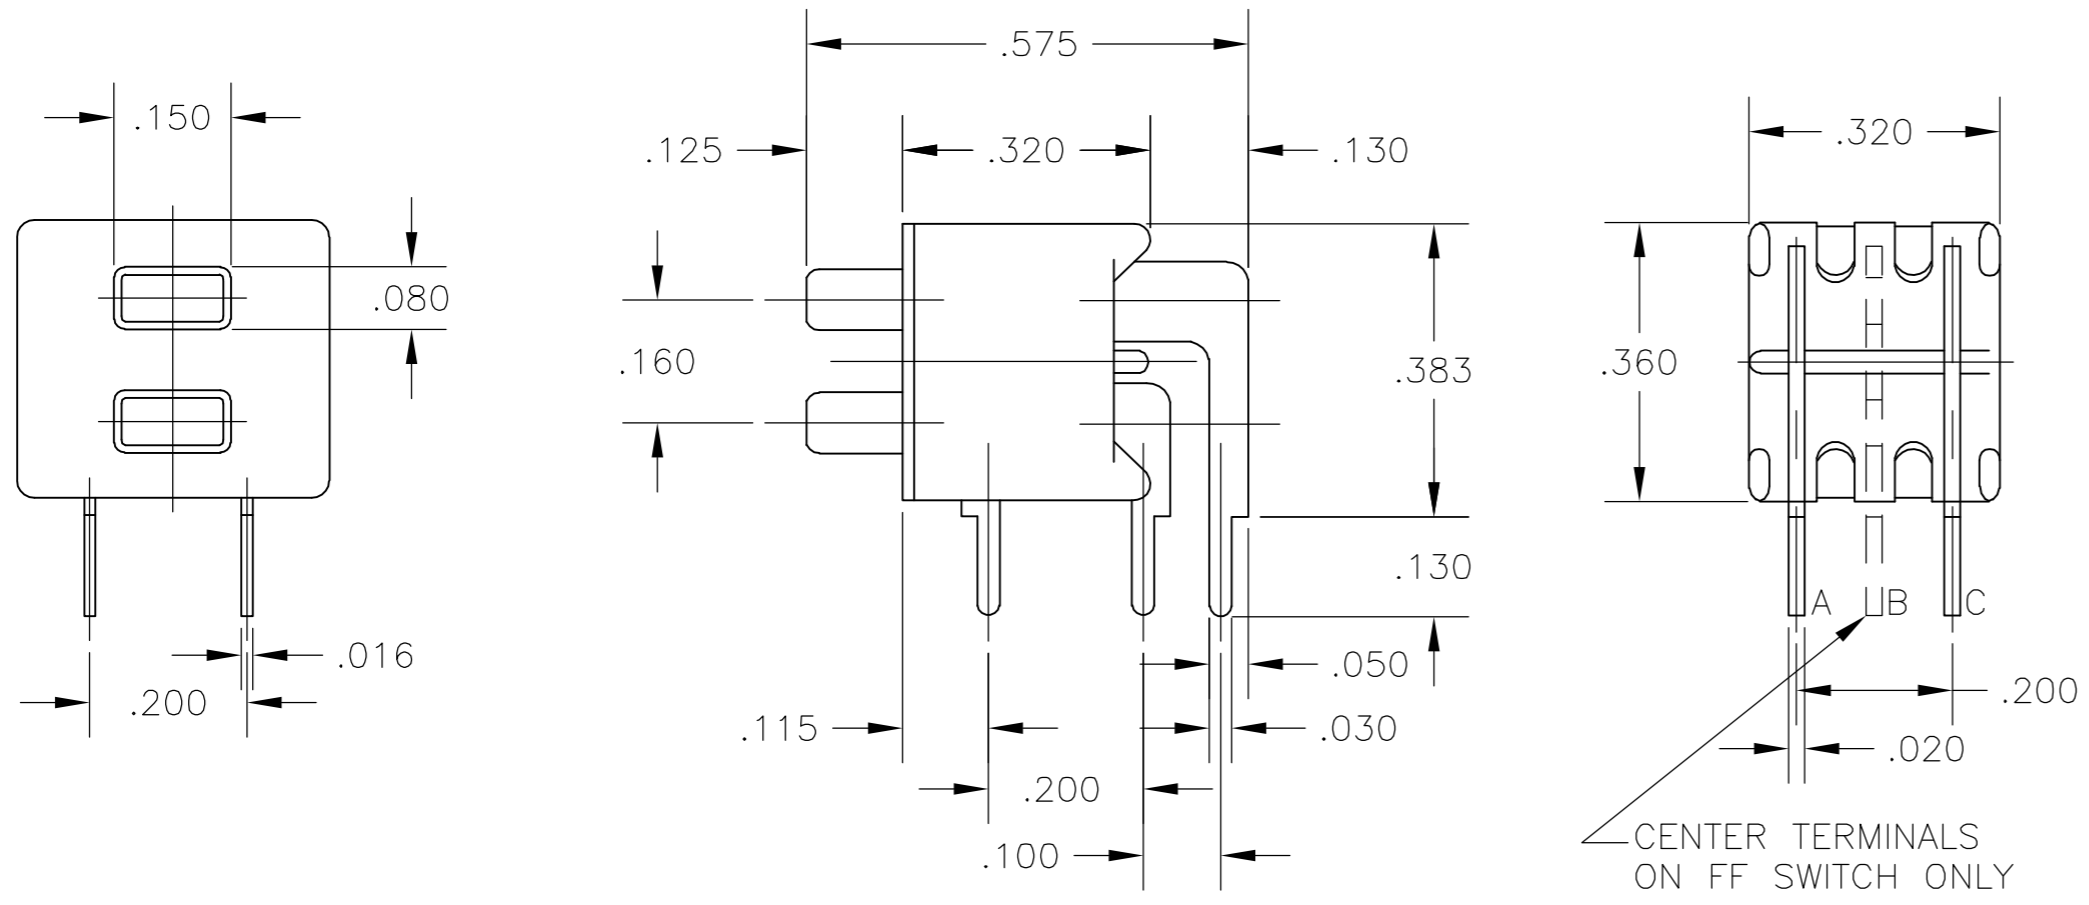

SPECIFICATIONS:

MATERIALS:  
 CASE: HIGH TEMPERATURE POLYESTER  
 ACTUATOR: POLYAMIDE  
 CONTACT: GOLD OVER NICKEL BARRIER  
 TERMINAL: COPPER ALLOY, TIN/LEAD PLATE


ELECTRICAL:  
 CONTACT RATING: 0.4 VA MAX. @20 VDC OR PEAK AC  
 INITIAL CONTACT RESISTANCE: 20 MILLIOHMS MAX.  
 INSULATION RESISTANCE: 1000 MEGOHMS @ 500 VDC MIN.  
 DIELECTRIC STRENGTH: 1000 VOLTS RMS @ SEA LEVEL  
 LIFE EXPECTANCY: 50,000 CYCLES MIN

MECHANICAL:  
 ACTUATION FORCE: 50 TO 400 GRAMS AVERAGE

ENVIRONMENTAL:  
 OPERATING TEMPERATURE: -22°F TO +149°F (-30°C TO +65°C)  
 STORAGE TEMPERATURE: -22°F TO +149°F (-30°C TO +65°C)

NOTES:

- INTERPRET DRAWING PER ASME Y14.5M-1994
- TERMINALS ARE EPOXY SEALED.

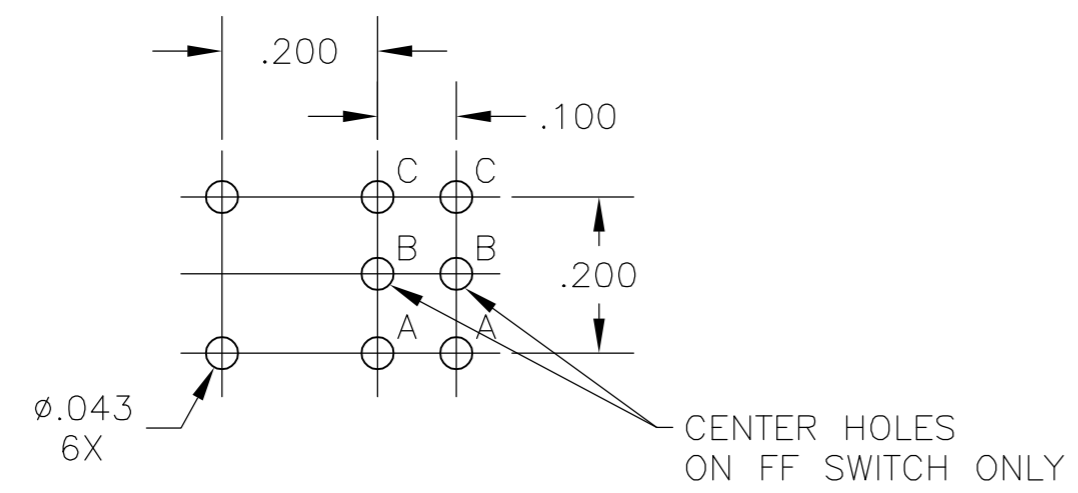

RECOMMENDED HOLE LAYOUT  
 TOLERANCE ±.002 UNLESS OTHERWISE NOTED

(\* ) SPECIFY BUTTON COLOR -  
 (0) = BLACK  
 (2) = RED  
 (6) = BLUE

B TO C (MOM.)	B TO A	2XSPDT MOMENTARY	TP21FFG-RA (*)
A TO C	NONE	2XSPST NORMALLY OPEN	TP21CCG-RA (*)
DEPRESSED BUTTON	FREE BUTTON	ACTION	MODEL NO.
CONTACTS			

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TRU-D	11SEP96	<b>tyco</b> Electronics	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: INCHES		CHK	-	-		NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	-	-	PRODUCT SPEC		
0 PLC ± -		APPLICATION SPEC		-	PUSH BUTTON SWITCH RIGHT ANGLE, (TP21**GRA* SERIES)		
1 PLC ± -		WEIGHT		-	SIZE	CAGE CODE	DRAWING NO
2 PLC ± -		CUSTOMER DRAWING		-	A2	00779	C=1-1437571-8
3 PLC ± .010		SCALE		4:1	SHEET		1 OF 1
4 PLC ± -		REV		A	RESTRICTED TO		-
ANGLES ± -		FINISH		-			
MATERIAL SEE SPECIFICATIONS							

1-1437571-8