



**Electrical Specifications**

**Center Frequency:** 1445 MHz  
**Bandwidth:** 30 MHz  
**Passband:** 1430-1460 MHz  
**Pole:** 6  
**Insertion Loss:** 2.0 dB Max  
**Ripple in BW:** 1.0 dB Min  
**VSWR:** 1.5:1  
**Attenuation:** >40 dB @ 1400 MHz  
                   >40 dB @ 1500 MHz  
**Impedance:** 50Ω


**Mechanical**

**Mounting Method:** SMT  
**Dimensions:** 38 x 17 x 7.5 mm

**Environmental**

**Operating Temperature:** -30 to +75° C  
**Storage Temperature:** -30 to +85° C

**Outline Drawing:**

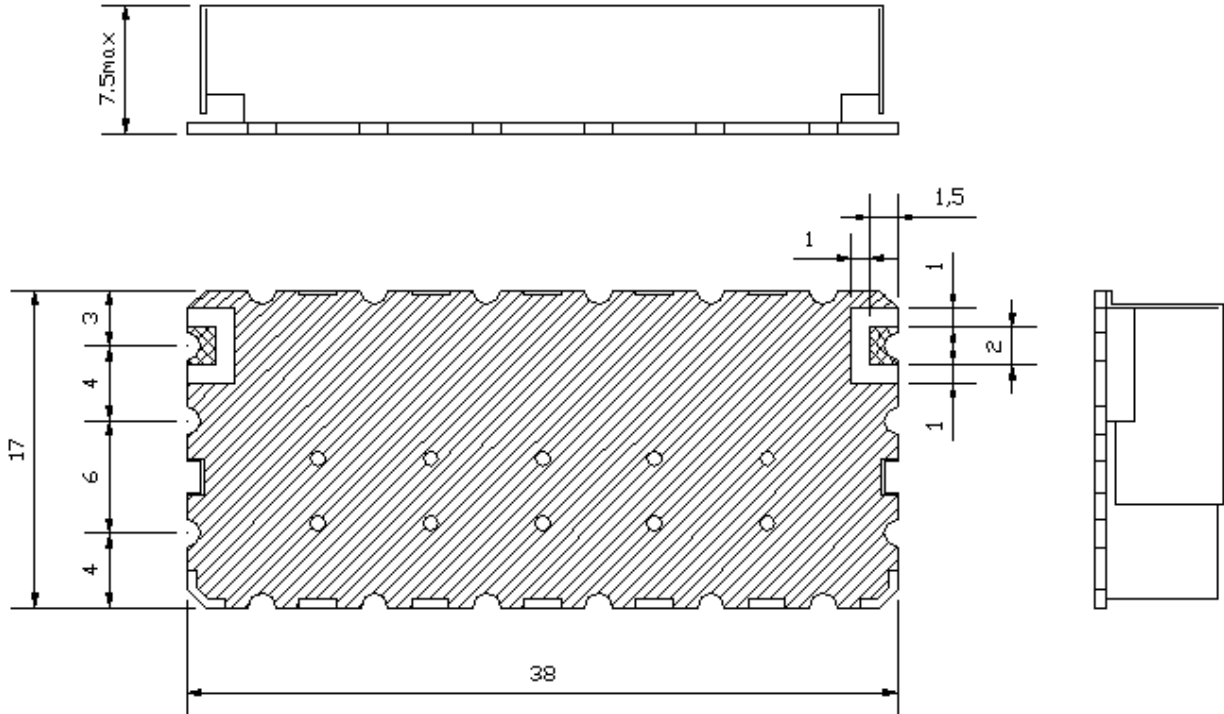

Unit:mm  
Tolerance:±0.3