

—	۵	بر	m	O



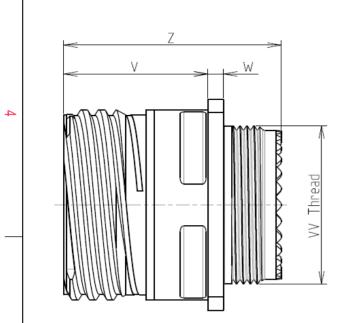



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Stainless Steel			
	-Shell Plating	: Nickel			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
\sim	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	_: -65°C to +200°C			
	-Salt Spray	: 500 hours			
	-Mass	: 32.47 g ± 10%			

8D 0

G

11

S

01

В

F

E

D ¹	dimension		
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		


ORIENTATION : E

CONTACT LAYOUT : 11-01

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

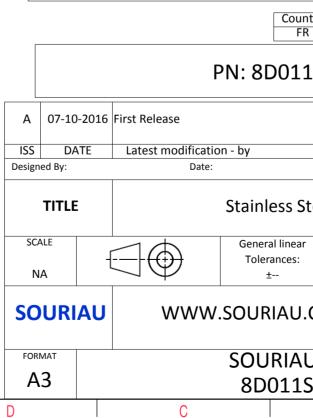

	Φ		Þ		
					4
AS EXAM	IPLE				3
s which er of the	does not co e Parties or k , technical n Jurisd	by a third part			2
				MOD N°	
Steel	CUSTOMER DRAWING eel Receptacle 8D series NPRDS / PROJECT 859				
	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
	RG N° BE-C			SHEET 1/2	
	B		A		J

		۵	н г	m	D	0
		Contact Layout				Panel Cutout
4		01			Â	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
		1#12 11-01]		* 	
ى	Ctc A	X Y 0 0				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of
2						(professional recommendati Country FR PN: 8D011S
					A 07-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
<u> </u>					TITLE SCALE NA	Stainless Ster General linear Tolerances: ±
					FORMAT A3	SOURIAU
l	H	G	F	E	D	8D011S0

