


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00923	Connector, dc plug, 4.0x1.7xL20.0 mm, spring contacts, brass nickel plated, yellow insulator	1	
2	30-00404	Wire, 2C TS, 24 AWG, UL2468, 300V, 80C, 3.0 mm, VW-1, PVC, 87A	1	
3	24-00008	Overmold, PVC	1	black

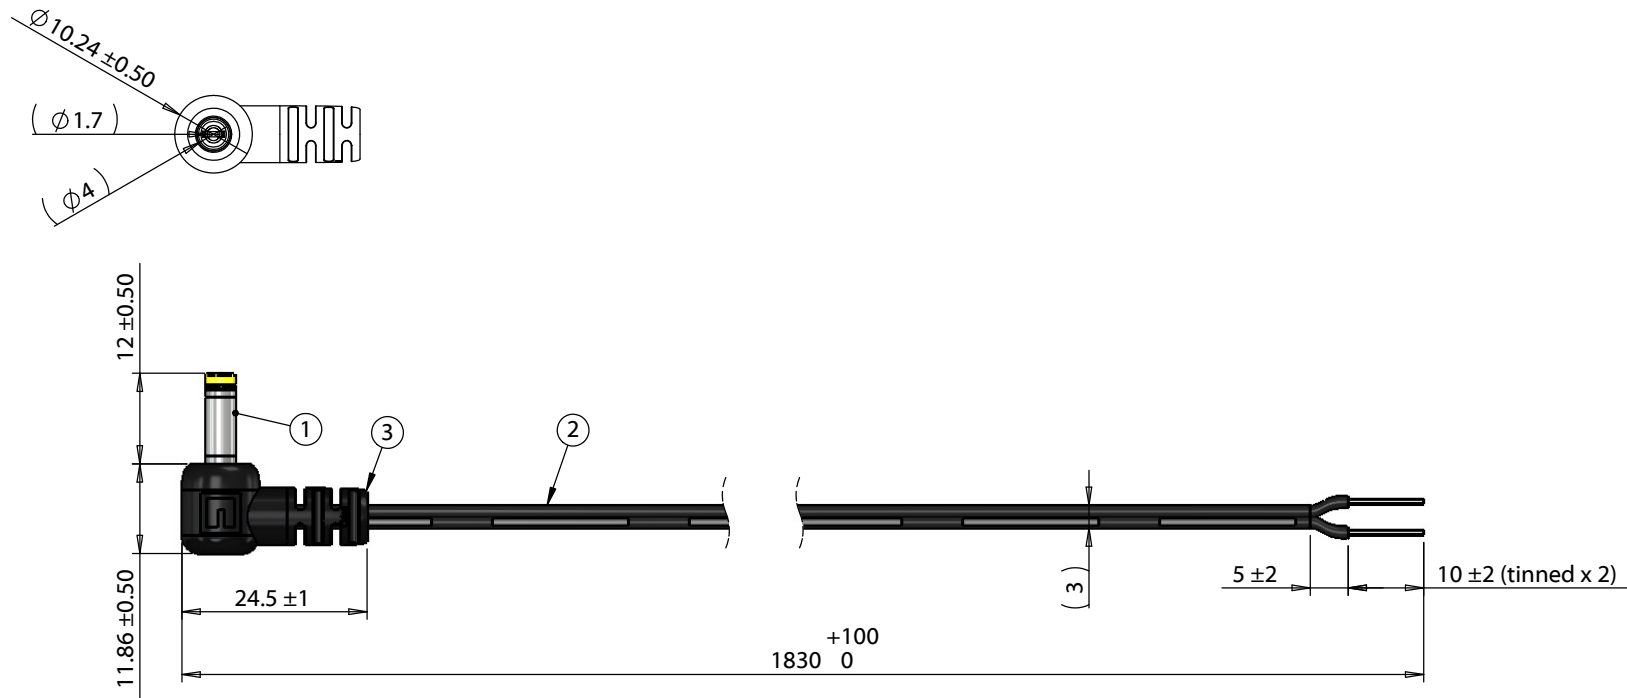

Notes:
Functionally equivalent components may be substituted

Wiring Diagram	
50-00923	wire color
center	black with stripe
sleeve	black

Revision:	Date:	Description:	Prepared: AW <small>Digitally signed by AW Date: 2018.06.13 15:43:48 -07'00'</small>	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	02/06/2018	Initial release	Verified: AG <small>Digitally signed by AG Date: 2018.06.13 15:47:57 -07'00'</small>	RoHS and REACH compliant	
A1	6/13/2018	Corrected connector part number	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Function test: no open, no short circuit, no intermittent	
				Description: Cable, 1830 mm, 4.0x1.7x12 mm 90° 50-00923 dc plug to 10 mm tinned, 24 AWG, UL2468, 30-00404 wire	
				Size: A	Part number: 10-02497
				Scale: 1:1	Sheet 1 of 1

5

4

3

2

1