

TECHNICAL DATA SHEET

Part#: 2A-S



Tweezers - Straight Tapered Flat Point - ★★★- SS

The 2A-S three star straight tapered flat pointed tweezer is designed for handling labels or SMD components. The overall length is 4.75" and it is made of stainless steel. The tips measure .059" wide by .008" high.

| | |
|-----------------------|------------------------------|
| • Precision Level | ★★★ |
| • Material | SS (AISI 440) |
| • Surface Resistivity | Conductive |
| • Shape | Straight Tapered |
| • Group | Tweezers |
| • Weight (OZ) | 1 |
| • Tip Size (CTM) | .059" (1.5mm) x .008" (.2mm) |
| • Tip Angle | n/a |
| • Tip Length | n/a |
| • Body Width | 0.393" (9.83mm) |
| • Body Height One Leg | .06" (1.5mm) |
| • OAL | 4.75" (118.75mm) |
| • Country of Origin | Switzerland |
| • UPC | 662847002182 |
| • Schedule B | 8203.20.20.00 |
| • Harmonization Code | 8203.20.20 |
| • ECCN | EAR99 |
| • UNSPSC Code | 27112105 |



C.T.M.
Critical Tip Measurements
(Tip Width and Thickness of one point)

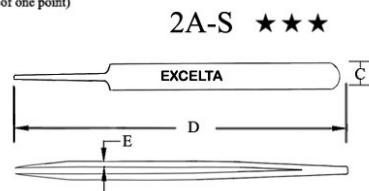

EXCELTA[®]
CORPORATION

- A) 0.059"
- B) 0.0078"
- C) 0.393"
- D) 4.75"
- E) 0.060"