

DESCRIPTION: 2MM RECEPTACLES - DUAL ROW - SMT



UNITS = INCHES [MM]

**MATERIAL:**

HOUSING: NYLON 6T, UL 94V-0, BLACK  
 CONTACT: PHOSPHOR BRONZE  
 PLATING: GOLD FLASH ENTIRE CONTACT



**ELECTRICAL:**

CURRENT RATING: 2 AMPS  
 CONTACT RESISTANCE: 20mOHMS Max.  
 INSULATOR RESISTANCE: 5.000MOHMS Min.  
 DIELECTRIC WITHSTANDING: 500VAC  
 OPERATING TEMPERATURE: -40° TO +105° C  
 PROCESS TEMPERATURE: 260° C FOR 10 SECONDS

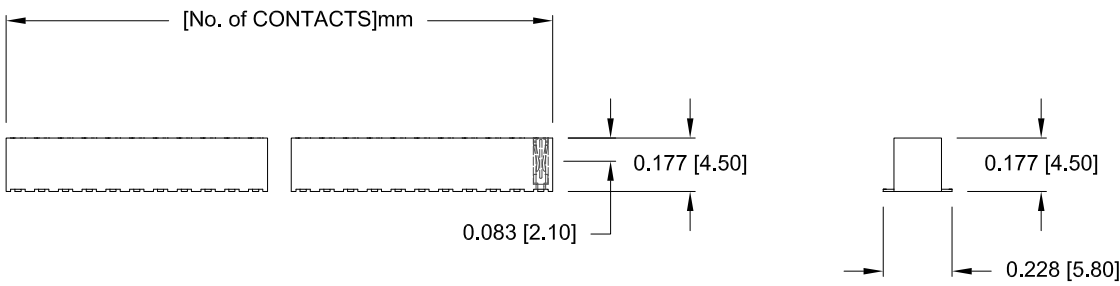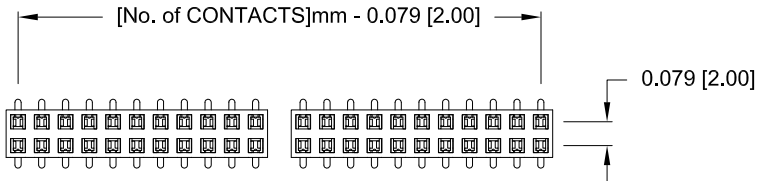

**2864 YY 06 R P2**

SERIES \_\_\_\_\_  
 2864 = DUAL ROW  
 POSITIONS \_\_\_\_\_  
 DUAL - INCREMENTS OF 2  
 (6 TO 80)  
 TYPE \_\_\_\_\_  
 06 = SURFACE MOUNT  
 RoHS COMPLIANT \_\_\_\_\_  
 HIGH TEMP.  
 PLATING \_\_\_\_\_  
 P2 = GOLD FLASH

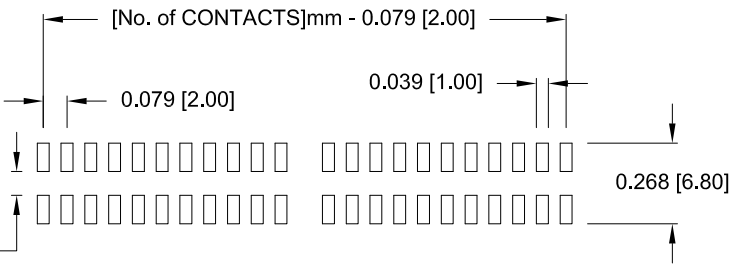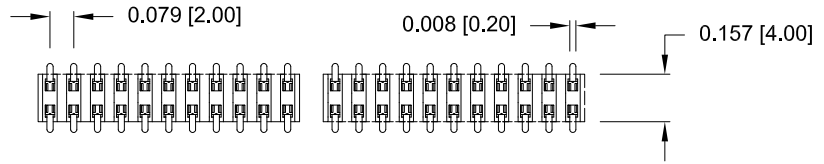


PCB LAYOUT

GENERAL TOLERANCE =  $\pm 0.008 [\pm 0.20]$

DO NOT SCALE FROM DRAWING

RoHS COMPLIANT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: J. KADEL	DATE: 03/05/2019
	<b>NorComp</b>		SCALE: NTS	SHEET 1 OF 1
DWG NO. 2864YY06RP2				