776087-4 - ACTIVE

AMP | AMPSEAL TE Internal #: 776087-4 PCB Mount Header, Right Angle, Wire-to-Board, 23 Position, 4 mm [.157 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Sealable, AMPSEAL

View on TE.com >



Connectors > PCB Connectors > PCB Headers & Receptacles > AMPSEAL PCB Horizontal Headers



Connector System: Wire-to-Board Number of Positions: 23 Centerline (Pitch): 4 mm [.157 in] Sealable: Yes PCB Mount Orientation: Right Angle All AMPSEAL PCB Horizontal Headers (55)

Features

Product Type Features

PCB Connector Assembly Type

PCB Mount Header

| Header Type | Fully Shrouded |
|---|-----------------------|
| Connector System | Wire-to-Board |
| Sealable | Yes |
| Connector & Contact Terminates To | Printed Circuit Board |
| Configuration Features | |
| Number of Positions | 23 |
| PCB Mount Orientation | Right Angle |
| Number of Rows | 3 |
| Contact Features | |
| Contact Type | Pin |
| Contact Mating Area Plating Material | Tin |
| Contact Current Rating (Max) | 8 A |
| Termination Features | |
| Termination Method to Printed Circuit Board | Through Hole - Solder |
| Mechanical Attachment | |

C For support call+1 800 522 6752

776087-4

PCB Mount Header, Right Angle, Wire-to-Board, 23 Position, 4 mm [.157 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Sealable, AMPSEAL



| Mating Alignment | With |
|--|--|
| PCB Mount Alignment | With |
| PCB Mount Retention | With |
| Connector Mounting Type | Fixing Screw |
| Housing Features | |
| Centerline (Pitch) | 4 mm[.157 in] |
| Usage Conditions | |
| | |
| Operating Temperature Range | -40 – 105 °C[-40 – 221 °F] |
| Operating Temperature Range Operation/Application | -40 – 105 °C[-40 – 221 °F] |
| | -40 – 105 °C[-40 – 221 °F] Power & Signal |
| Operation/Application | |
| Operation/Application Circuit Application | |
| Operation/Application Circuit Application Industry Standards | Power & Signal |
| Operation/Application Circuit Application Industry Standards UL Flammability Rating | Power & Signal |

Product Compliance

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU | Compliant |
|---|--|
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC |
| Halogen Content | Not Low Halogen - contains Br or Cl > 900 ppm. |
| Solder Process Canability | Wave solder canable to 265°C |

Solder Process Capability

Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent to these limits as defined in the Annexes of Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits

776087-4

PCB Mount Header, Right Angle, Wire-to-Board, 23 Position, 4 mm [.157 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Sealable, AMPSEAL





as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts



Also in the Series | AMPSEAL

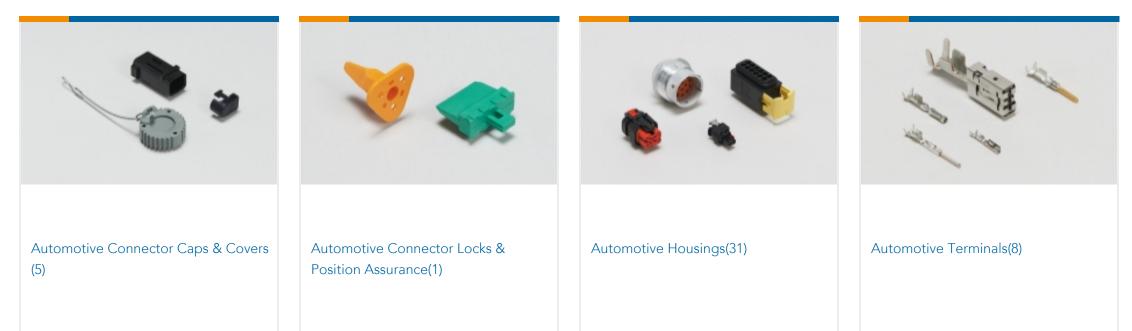

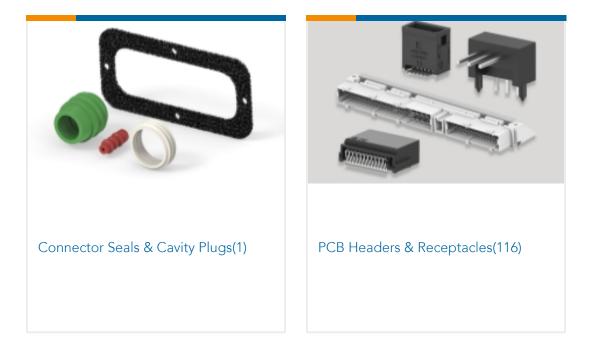

Customers Also Bought



776087-4

PCB Mount Header, Right Angle, Wire-to-Board, 23 Position, 4 mm [.157 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Sealable, AMPSEAL





Documents

Product Drawings 23POS,PIN DIA 1.3,HDR ASSY,90DEG,COD 4

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_776087-4_N.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_776087-4_N.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_776087-4_N.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages AMPSEAL Connector Catalog

English

ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications
Application Specification

English

Agency Approvals UL Report English