

## CPDT-36VEU-HF

**RoHS Device**  
**Halogen Free**





### Features

- Unidirectional ESD protection diode.
- High ESD protection level.
- Working voltage: 36V.
- Low clamping voltage.
- Low leakage current.

### Mechanical data

- Case: SOT-23 Standard package, molded plastic.
- Terminals: Solderable per MIL-STD-750, method 2026.
- Mounting position: Any.

### Circuit Diagram

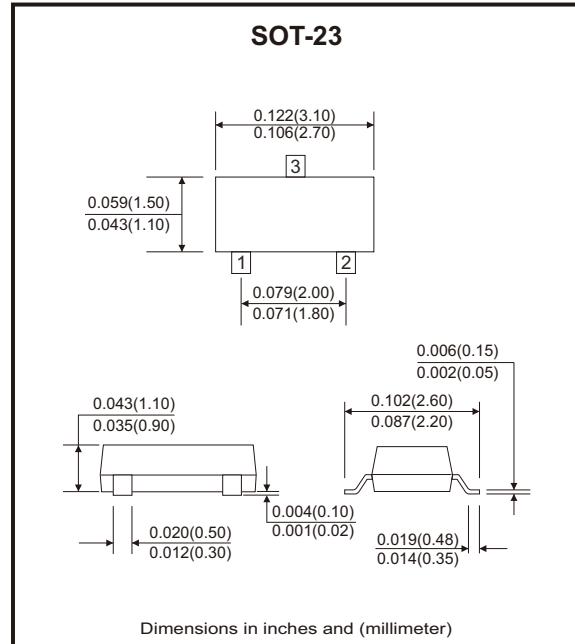

### Maximum Rating (at $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Conditions	Symbol	Value	Unit
Peak pulse power	$T_P = 8/20\mu\text{s}$	$P_{PP}$	100	W
Peak pulse current	$T_P = 8/20\mu\text{s}$	$I_{PP}$	1.5	A
Operating temperature		$T_j$	-40~+125	$^\circ\text{C}$
Storage temperature range		$T_{STG}$	-55~+150	$^\circ\text{C}$

### Electrical Characteristics (at $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Reverse stand-off voltage		$V_{RWM}$			36	V
Breakdown voltage	$I_R = 1\text{mA}$	$V_{BR}$	40			V
Reverse leakage current	$V_R = 36\text{V}$	$I_R$			0.1	$\mu\text{A}$
Forward voltage	$I_F = 10\text{mA}$	$V_F$			1.2	V
Clamping voltage	$I_{PP} = 1\text{A}, T_P = 8/20\mu\text{s}$	$V_c$			58	V
Junction capacitance	$V_R = 0\text{V}, f = 1\text{MHz}$	$C_J$		20		pF

# SMD ESD Protection Diode

**Comchip**  
SMD Diode Specialist

## Rating and Characteristic Curves (CPDT-36VEU-HF)

Fig.1 - 8/20 $\mu$ s Peak Pulse Current  
Waveform ACC. IEC 61000-4-5

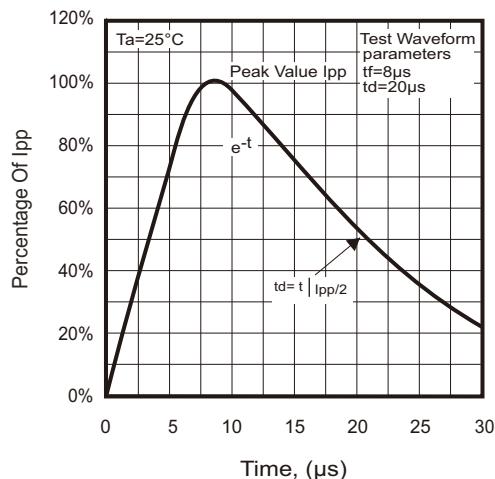


Fig.2 - Power Rating Derating Curve

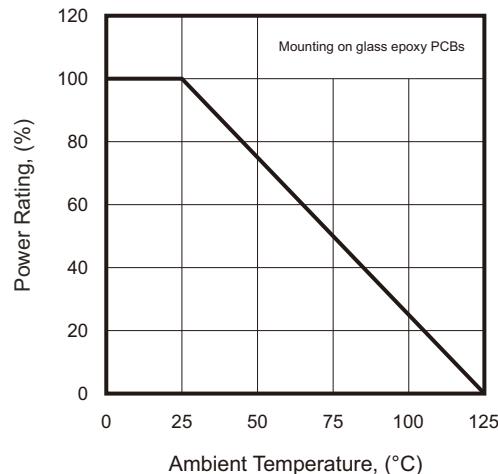


Fig.3 - Clamping Voltage Vs.  
Peak Pulse Current



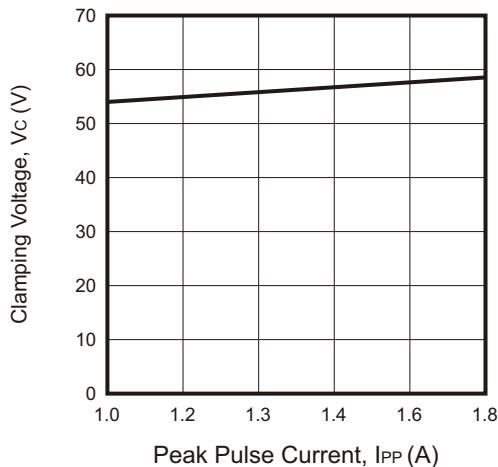


Fig.4 - Capacitance Between  
Terminals Characteristics

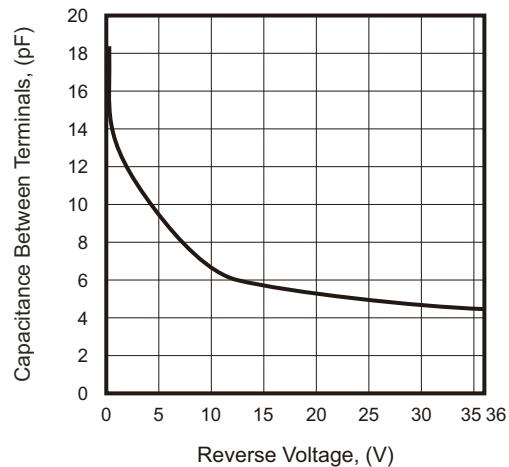

## Reel Taping Specification

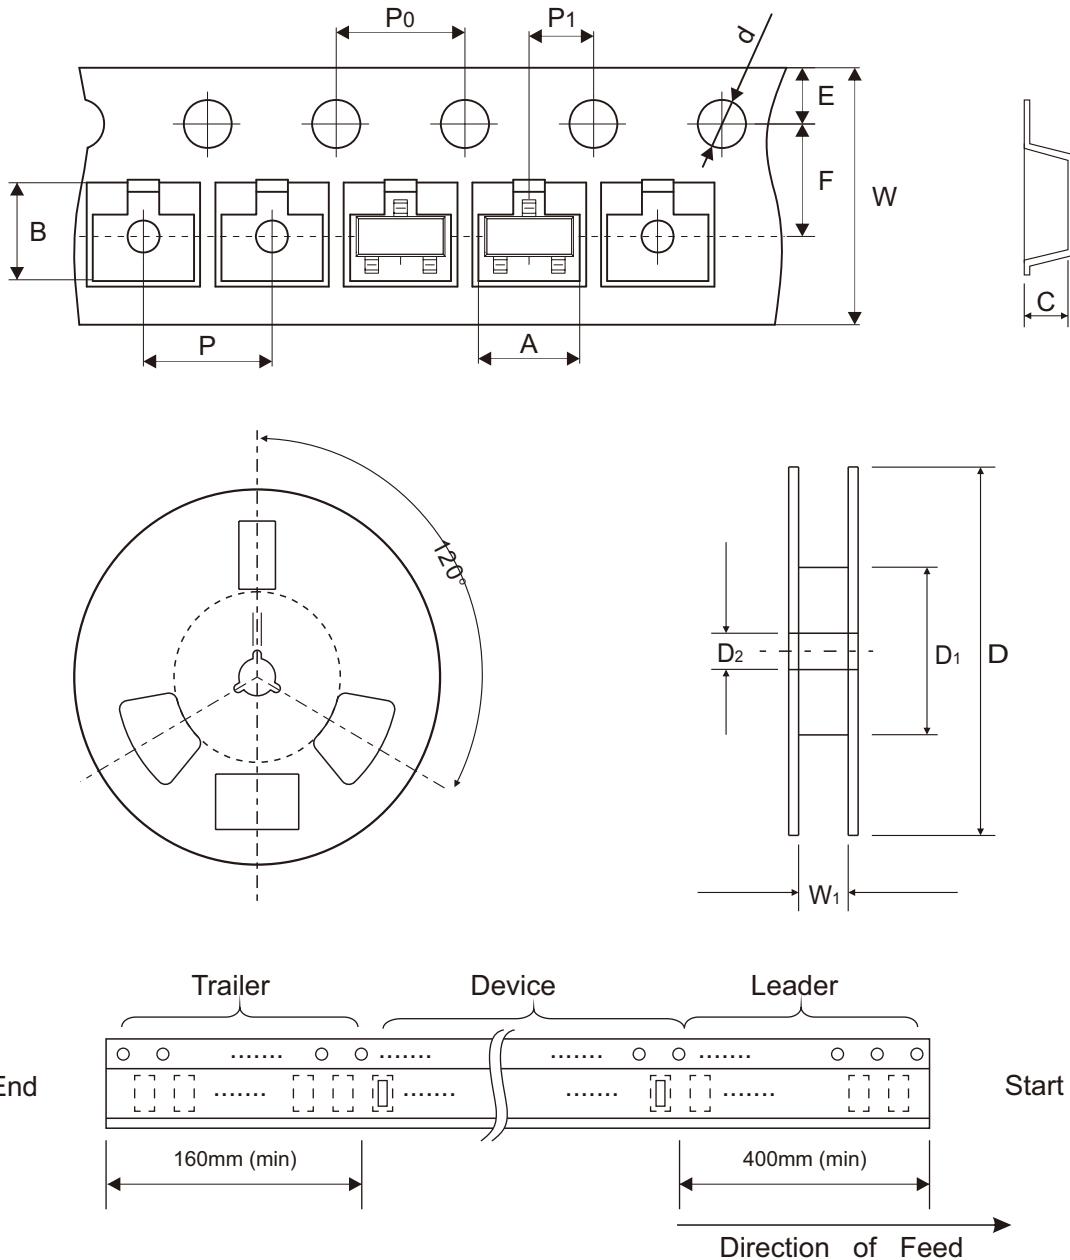

	SYMBOL	A	B	C	d	D	D <sub>1</sub>	D <sub>2</sub>
SOT-23	(mm)	$3.15 \pm 0.10$	$2.77 \pm 0.10$	$1.22 \pm 0.10$	$1.50 \pm 0.10$	$178.00 \pm 1.00$	$54.00 \pm 0.50$	$13.00 \pm 0.50$
	(inch)	$0.124 \pm 0.004$	$0.109 \pm 0.004$	$0.048 \pm 0.004$	$0.059 \pm 0.004$	$7.008 \pm 0.039$	$2.126 \pm 0.020$	$0.512 \pm 0.020$


	SYMBOL	E	F	P	P <sub>0</sub>	P <sub>1</sub>	W	W <sub>1</sub>
SOT-23	(mm)	$1.75 \pm 0.10$	$3.50 \pm 0.05$	$4.00 \pm 0.10$	$4.00 \pm 0.10$	$2.00 \pm 0.05$	$8.00 \pm 0.30$ $-0.10$	$9.50 \pm 1.00$
	(inch)	$0.069 \pm 0.004$	$0.138 \pm 0.002$	$0.157 \pm 0.004$	$0.157 \pm 0.004$	$0.079 \pm 0.002$	$0.315 \pm 0.012$ $-0.004$	$0.374 \pm 0.039$

Company reserves the right to improve product design, functions and reliability without notice.

REV:A

## Marking Code


Part Number	Marking Code
CPDT-36VEU-HF	E36

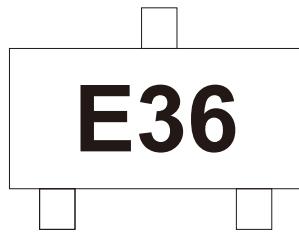

## Suggested P.C.B. PAD Layout

SIZE	SOT-23	
	(mm)	(inch)
A	0.90	0.035
B	0.80	0.031
C	0.95	0.037
D	2.00	0.079

Note: 1. The pad layout is for reference purposes only.

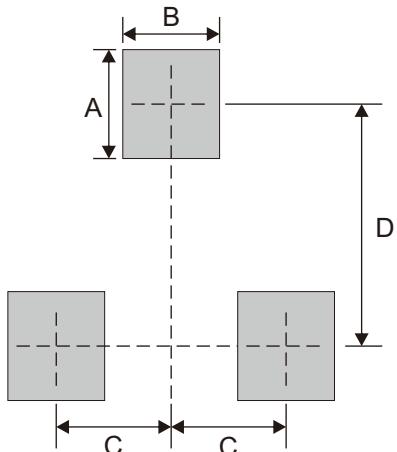

## Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
SOT-23	3,000	7