

**NOTES:**

1. METALSHELLS: STEEL; min. 315µm TIN over 40-80µm NICKEL
2. INSULATORS: PBT GF UL 94 V-0; GREEN
3. SIGNAL CONTACTS: COPPER ALLOY  
PLATING: GOLD FLASH over NICKEL
4. NO CONTACTS ON POS.A1 - A4
5. P.C.B. HOLE DRILLINGS SEE SHEET 2
6. CONNECTOR IS PART MARKED: **321WA4SAR99A10X CONEC ABC**

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH


DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name	tolerance	dim. in mm
a	Original				
drawn	25.07.11	Henneboel			
appd.	26.07.11	Fischer			
norm					
d-old					



scale:	2:1 (5:1)	
material:	see notes	
title:	<b>D-SUB COMBINATION FEMALE</b> 21WA4S	
dwg no:	13K1A3723	DIN-A3
part no:	321WA4SAR99A10X	sh: 1

P.C.B. HOLE DRILLING  
( P.C.B. TOP SIDE )

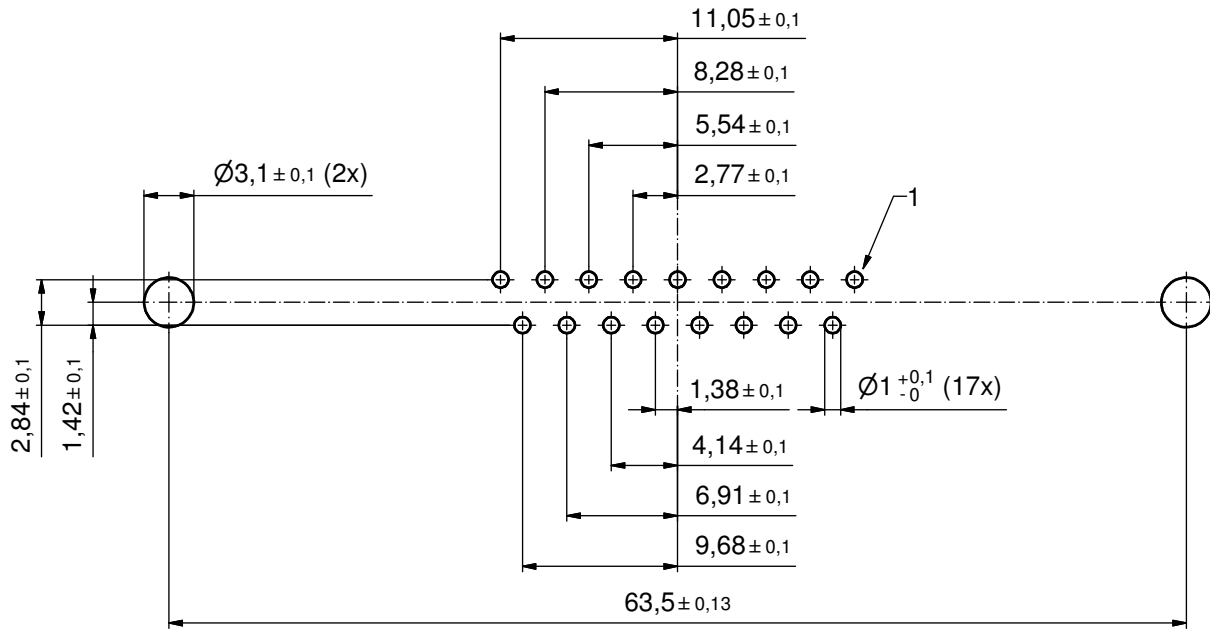

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH  DO NOT ALTER CAD DRAWING BY HAND				tolerance		scale: 3:1	
				dim. in mm		material: see sheet 1	
	rev.	description	date	name	drawn	date	name
	a	Original			25.07.11	25.07.11	Henneboel
					appd.	26.07.11	Fischer
					norm		
					d-old		
					title: <b>P.C.B. HOLE DRILLINGS</b> D-SUB COMBINATION FEMALE 21WA4S		
					dwg no: 13K1A3723		
					part no: see sheet 1		
					DIN-A3 sh: 2		