


| ITEM | PART#    | DESCRIPTION                            | QTY | UOM |
|------|----------|--|-----|-----|
| A    | 39012045 | 4CKT RECEPTACLE HOUSING 555704R210     | 1   | PC  |
| B    | 39000089 | MiniFit Term Crp Fem Chn Bs 30Au 16awg | 4   | PC  |
| C    | --       | PAPER PRINTED PAPER WHITE              | 1   | PC  |

| FROM | TO | DESCRIPTION                       | COLOR |
|------|----|-----------------------------------|-------|
| A1   | -- | 1X16AWG DISC PVC BK UL1015 HOOKUP | BLACK |
| A2   | -- | 1X16AWG DISC PVC BK UL1015 HOOKUP | BLACK |
| A3   | -- | 1X16AWG DISC PVC BK UL1015 HOOKUP | BLACK |
| A4   | -- | 1X16AWG DISC PVC BK UL1015 HOOKUP | BLACK |

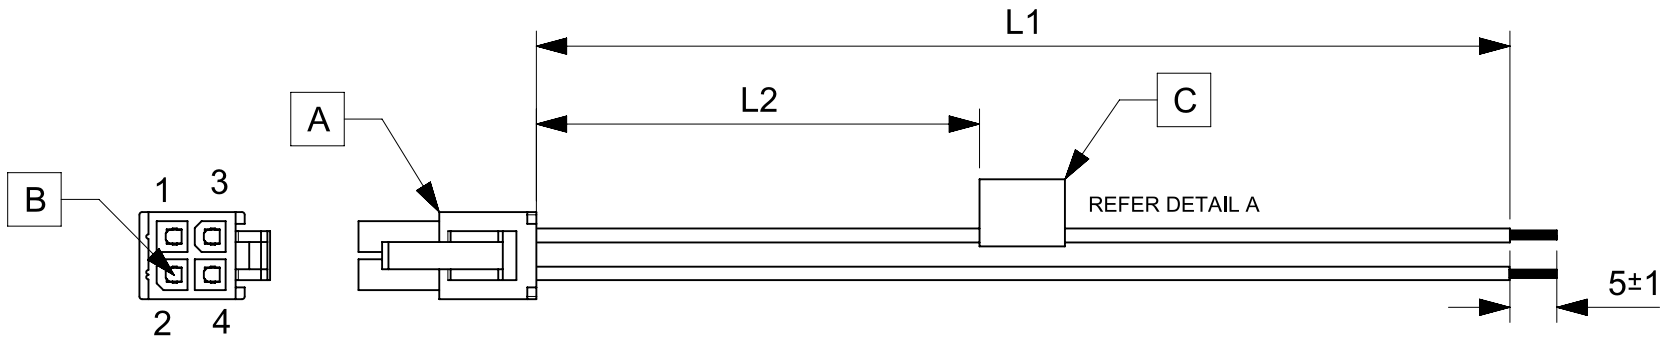

| TABLE       |        |         |                                      |
|-------------|--------|---------|--------------------------------------|
| PART NUMBER | L1     | L2      | TITLE                                |
| 2153262041  | 150±8  | 63 REF  | MINIFIT JR DR R-S 4 CIRCUIT 150MM Au |
| 2153262042  | 300±10 | 138 REF | MINIFIT JR DR R-S 4 CIRCUIT 300MM Au |
| 2153262043  | 600±10 | 288 REF | MINIFIT JR DR R-S 4 CIRCUIT 600MM Au |

- NOTES**
1. Connector view shown is from mating side.
  2. Free ends must be stripped, twisted & tinned. The length of tinning is 5±1mm. Tinning dia must be 1.8mm Max.
  3. Label text must be 2mm max. in height with Arial font.
  4. Label must be wrapped in Flag type on a single cable.

MOLEX P/N  
MOLEX  
BATCH WK/YR  
DETAIL A

| REVISION   |     |                 |         |
|------------|-----|-----------------|---------|
| DATE       | REV | DESCRIPTION     | CHANGER |
| 2020/03/09 | A   | INITIAL RELEASE | ARAJU   |

|   |   |                             |  |  |  |   |  |   |
|---|---|-----------------------------|--|--|--|---|--|---|
| <b>FUNCTIONAL SYMBOLS</b><br>$F_A = 0$<br>$F_E = 0$<br>$F_P = 0$  | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |                             | DIMENSION UNITS: <b>mm</b> SCALE: <b>NTS</b>                                   |  | CURRENT REV DESC:<br><br>EC NO: 638379<br>DRWN: ARAJU    2020/03/09<br>CHK'D: RDESAI01    2020/05/28<br>APPR: RDESAI01    2020/05/28 |   |  |   |
|   | GENERAL TOLERANCES (UNLESS SPECIFIED)<br>ANGULAR TOL ± °  |                             | SEE TABLE  |  |  |   |  |   |
|   | <b>DIVISIONAL SYMBOLS</b><br>4 PLACES ±<br>3 PLACES ±<br>2 PLACES ±<br>1 PLACE ±<br>0 PLACES ±  |                             | INITIAL REVISION:<br>DRWN: ARAJU    2020/03/09<br>APPR: RDESAI01    2020/05/28 |  |  | PRODUCT CUSTOMER DRAWING                      |  |   |
|   | DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS  |                             | THIRD ANGLE PROJECTION   |  |  | DRAWING: <b>A4-SIZE</b> SERIES: <b>215326</b> |  | DOCUMENT NUMBER: <b>2153262041</b> DOC TYPE: <b>PSD</b> DOC PART: <b>000</b> REVISION: <b>A</b> |
| MATERIAL NUMBER: <b>SEE TABLE</b> CUSTOMER: <b>GENERAL MARKET</b> |   | SHEET NUMBER: <b>1 OF 1</b> |  |  |  |   |  |   |