

注記  
NOTES

- △1 CKT.NO.1を基準に偶数番目のソルダーテール。  
EVEN NO. SOLDER TAIL.
- △2 CKT.NO.1を基準に奇数番目のソルダーテール。  
ODD NO. SOLDER TAIL.

3. 材料


MATERIAL

ターミナル:リン青銅、ニッケル下地、錫ビスマスめっき (t=0.32)  
 TERMINAL:PHOSPHOR BRONZE, TIN-BISMUTH OVER NICKEL PLATING.  
 ハウジング:66ナイロン、UL94V-0  
 HOUSING:66NYLON, UL94V-0  
 アクチュエータ:ポリエステル、UL94V-0  
 ACTUATOR:POLYESTER, UL94V-0

- 4. 本製品は、52030-\*\*10の鉛フリー品である。  
THIS PRODUCT IS LEAD FREE OF 52030-\*\*10.


35.3	31.2	52030-3029	30
34.3	30.2	52030-2929	29
33.3	29.2	52030-2829	28
32.3	28.2	52030-2729	27
31.3	27.2	52030-2629	26
30.3	26.2	52030-2529	25
29.3	25.2	52030-2429	24
28.3	24.2	52030-2329	23
27.3	23.2	52030-2229	22
26.3	22.2	52030-2129	21
25.3	21.2	52030-2029	20
24.3	20.2	52030-1929	19
23.3	19.2	52030-1829	18
22.3	18.2	52030-1729	17
21.3	17.2	52030-1629	16
20.3	16.2	52030-1529	15
19.3	15.2	52030-1429	14
18.3	14.2	52030-1329	13
17.3	13.2	52030-1229	12
16.3	12.2	52030-1129	11
15.3	11.2	52030-1029	10
14.3	10.2	52030-0929	9
13.3	9.2	52030-0829	8
12.3	8.2	52030-0729	7
11.3	7.2	52030-0629	6
10.3	6.2	52030-0529	5
9.3	5.2	52030-0429	4
8.3	4.2	52030-0329	3
B	A	オーダー番号 ORDER NO.	極数 CKT.

QUALITY SYMBOLS ▽A = 0 ▽E = 0 ▽F = 0 ▼ = 0 ▽C = 0 ⊠ = 0 ■ = 0 ▽ = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		DIMENSION UNITS <b>mm</b>	SCALE <b>10:1</b>					
	EC NO: 102046 DRWN: JASANUMA CHK'D: YNOGAWA APPR: YNOGAWA	2015/12/01 2015/12/09 2015/12/09	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± 3.0 ° 4 PLACES ± 0.2 3 PLACES ± 0.2 2 PLACES ± 0.2 1 PLACE ± 0.25 0 PLACES ± 0.3	DRWN BY <b>JASANUMA</b>		DATE <b>2015/12/01</b>	<b>1.0 FPC CONN ZIF (ST)</b>		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWING SIZE <b>A3</b>	THIRD ANGLE PROJECTION	DRWN BY <b>JASANUMA</b>	DATE <b>2015/12/01</b>	PRODUCT CUSTOMER DRAWING			
EC NO: 102046 DRWN: JASANUMA CHK'D: YNOGAWA APPR: YNOGAWA		DRWN BY <b>JASANUMA</b>	DATE <b>2015/12/01</b>	CHK'D BY <b>KTAKAHASHI</b>	DATE <b>2015/12/01</b>	SERIES <b>52030</b>	MATERIAL NUMBER <b>SEE CHART</b>	CUSTOMER <b>GENERAL</b>	
EC NO: 102046 DRWN: JASANUMA CHK'D: YNOGAWA APPR: YNOGAWA		DRWN BY <b>JASANUMA</b>	DATE <b>2015/12/01</b>	APPR BY <b>YNOGAWA</b>	DATE <b>2015/12/09</b>	DOCUMENT NUMBER <b>520301000</b>	DOC TYPE <b>PSD</b>	DOC PART <b>000</b>	SHEET NUMBER <b>1 OF 2</b>

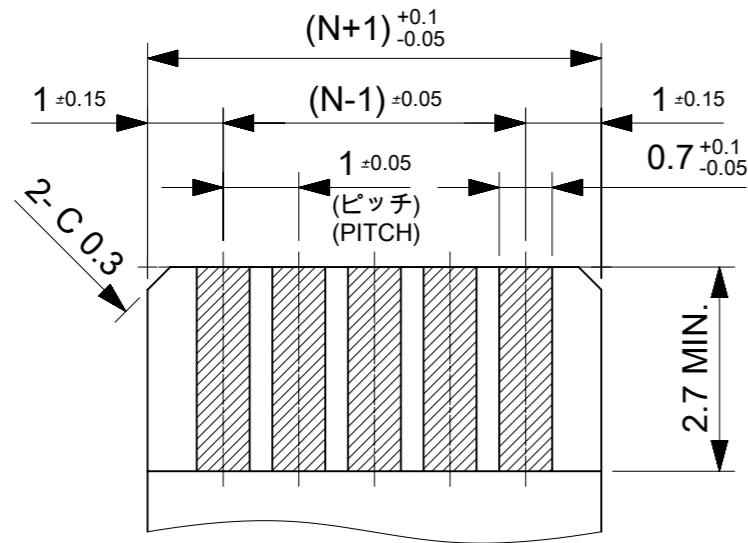

(仕上がり厚さ:0.3±0.05)  
(THICKNESS:0.3±0.05)

適合FPC推奨寸法  
APPLICABLE FPC RECOMMENDED DIM.

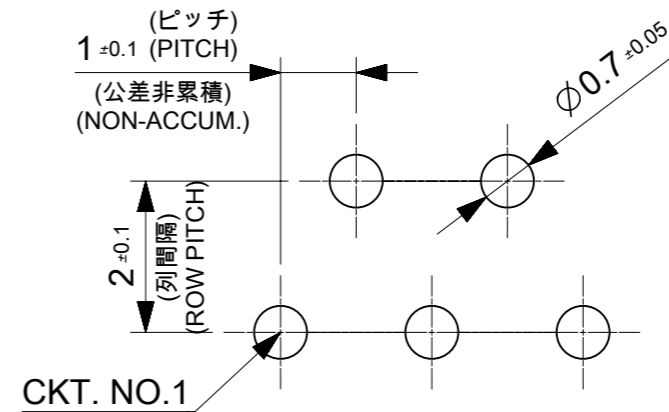

基板取付穴推奨寸法(t=1.6)  
RECOMMENDED P.C.BOARD HOLE DIM.(t=1.6)  
(マウント面)  
(MOUNT SURFACE)

FPCについて:

打ち抜き方向は、導体側から補強板側を推奨致します。  
補強フィルム材質は、ポリイミドを推奨致します。  
接着剤は、熱硬化接着剤を推奨致します。

ABOUT FPC:

RECOMMENDED PUNCHER DIRECTION: FROM CONDUCTOR SIDE TO STIFFENER BOARD SIDE.  
RECOMMENDED MATERIAL:  
STIFFENER FILM: POLYIMIDE  
BONDING AGENT: THEROSETTING BONDING AGENT

<b>QUALITY SYMBOLS</b> ▽A = 0 ▽E = 0 ▽F = 0 ▼ = 0 ▽C = 0 ⊗ = 0 ■ = 0 ▽ = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
	EC NO: 102046 DRWN: JASANUMA CHK'D: YNOGAWA APPR: YNOGAWA	2015/12/01 2015/12/09 2015/12/09	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS	SCALE				
			ANGULAR TOL ± 3.0 °		mm	1:1				
			4 PLACES	± 0.2	DRWN BY	DATE	1.0 FPC CONN ZIF (ST)			
			3 PLACES	± 0.2	JASANUMA	2015/12/01				
			2 PLACES	± 0.2	CHK'D BY	DATE	PRODUCT CUSTOMER DRAWING			
	1 PLACE	± 0.25	KTAKAHASHI							
	0 PLACES	± 0.3	APPR BY	DATE	SERIES	MATERIAL NUMBER	CUSTOMER			
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		YNOGAWA	2015/12/09	52030	SEE CHART	GENERAL			
			DRAWING SIZE	THIRD ANGLE PROJECTION	DOCUMENT NUMBER		DOC TYPE	DOC PART	SHEET NUMBER	
		A3		520301000		PSD	000	2 OF 2		