
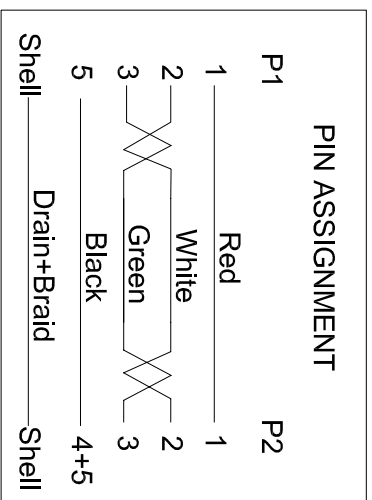


② Cable White print
AWM STYLE 2725 80°C 30V VW-1 28AWG/1P 28AWG/2C
---C--- AWM I/II A 80°C 30V FT1 USB CABLE

WSW P/N	Jacket color	Length(mm)
③ AK67501-0.3	Black	300±15
③ AK67501-0.5	Black	500±20
AK67501-1	Black	1000±20
AK67501-2	Black	2000±20
AK67501-3	Black	3000±30
AK67501-5	Black	5000±50

- Electrical test:**
1. 100% short, open, miss wire test
 2. Conduct resistance: 2 Ohm max.
 3. Insulator resistance: 10Mohm min.
 4. Dielectric test: DC 300V

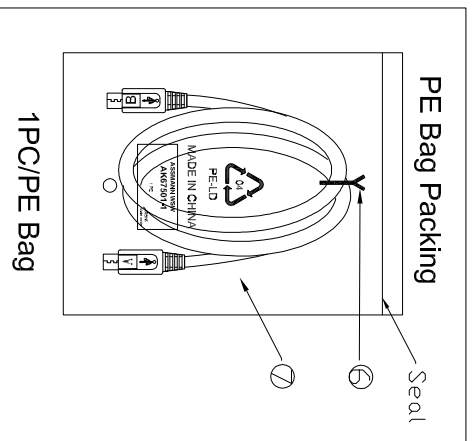

NO.	NAME.	SPECIFICATION	Q'TY/ Unit
⑦	PE Bag	Clear Print black "MADE IN CHINA"+ "1PC"	1 PCS
⑥	TIE	Black	1 PCS
⑤	Over Mold	Black PVC-45P	NA G
④	Inner Mold	PE	NA G
③	Cable	USB2.0 UL2725 (28#*1P+4L)+28#/2C+AEB Black OD:3.5mm	NA M
②	CONN	USB 2.0 Micro 5P A Male Shell:Nickel Pin:G/F Insulator color: black	1 PCS
①	CONN	USB 2.0 Micro 5P B Male Shell:Nickel Pin:G/F Insulator color: black	1 PCS

RoHS compliant
Unit: mm

Scale	Free
TOLERANCE	
DIM	TOL
Angle	TOL

Free	Id.	Modification	Date	Name
③	③	Add new length version	16.03.2017	Amy
②	②	Update	15.08.2016	Amy
①	①	Add P/N	10.11.2015	Joanna
①	①	Drawn	24.10.2014	Winnie

Customer-No.	Name	Date
Drawn	Winnie	24.10.2014
Approved	Amy	16.03.2017

ASSMANN WSW-No.

AK67501-X

Drawing-No.

ASS 7249 CA

rev03



Replace

Sheet

1 2 3 4 5 6 7

CAB0676