


# molex

## INSULATION DISPLACEMENT CABLE

.050" PITCH, 26 AWG, 19/38 STRANDED, EXTRUDED FEP

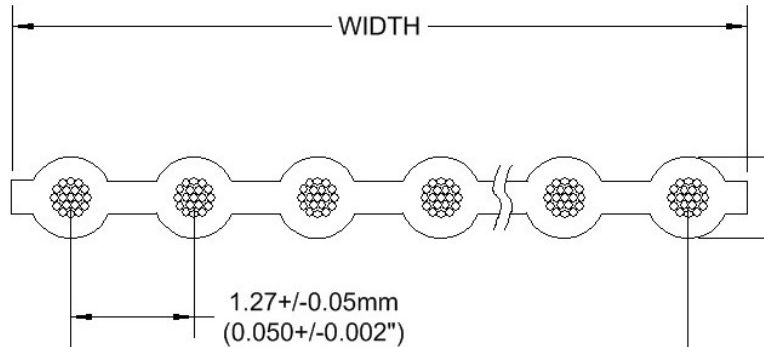

Cond. No.	Part Number	Span	Width
10	1000570483	11.4 ± 0.18mm (0.450 ± .007)	12.7 ± 0.18mm (0.500 ± .007)
15	1000570455	17.8 ± 0.18mm (0.700 ± .007)	19.0 ± 0.18mm (0.750 ± .007)
16	1000570126	19.0 ± 0.18mm (0.750 ± .007)	20.3 ± 0.18mm (0.800 ± .007)
20	1000570127	24.1 ± 0.18mm (0.950 ± .010)	25.4 ± 0.25mm (1.000 ± .010)
34	1000570132	41.9 ± 0.18mm (1.650 ± .010)	43.2 ± 0.25mm (1.700 ± .010)
40	1000570133	49.5 ± 0.18mm (1.950 ± .010)	50.8 ± 0.25mm (2.000 ± .010)
50	1000570134	62.23 ± 0.25mm (2.450 ± .010)	63.5 ± 0.25mm (2.500 ± .010)

CHARACTERISTICS	
Conductor	26 AWG, 19/38 Stranded, Silver Plated High Strength Copper Alloy.
Insulation	FEP
Color	Blue (Optional: Rainbow, 0.035 +/- 0.003")
Impedance (ohms)	100 Unbalanced
Capacitance (pF/ft)	12.0 Unbalanced
Inductance (uH/ft)	0.12 Unbalanced
Insulation Resistance (Mohm)	>500
Voltage Rating	300V
Temperature Rating	-55°C to 200°C

### PACKAGING

150 ft./spool , 20 ft. Minimum Length.

UL Style 20424