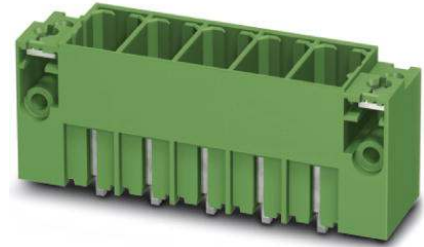


**PCV 35 HC/ 4-GF-15,00**

Order No.: 1762819

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1762819>Header, Nominal current: 125 A, Nom. voltage: 1000 V, Pitch: 15 mm,  
Number of positions: 4, Color: green, Assembly: Soldering**Commercial data**

EAN	4046356444071
Pack	25 pcs.
Customs tariff	85366990
Weight/Piece	0.085552 KG
Catalog page information	Page 443 (CC-2009)

**Product notes**WEEE/RoHS-compliant since:  
08/19/2008

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

**Technical data****Dimensions / positions**


Pitch	15 mm
Dimension a	45 mm
Number of positions	4
Pin spacing	15 mm

**Technical data**


Insulating material group	IIIa
Rated surge voltage (III/3)	8 kV
Rated surge voltage (III/2)	8 kV
Rated surge voltage (II/2)	8 kV
Rated voltage (III/2)	1000 V
Rated voltage (II/2)	1000 V
Nominal current $I_N$	125 A
Nominal voltage $U_N$	1000 V
Maximum load current	125 A
Insulating material	PBT
Inflammability class acc. to UL 94	V0

**Diagrams/Drawings**

Drilling plan/solder pad geometry

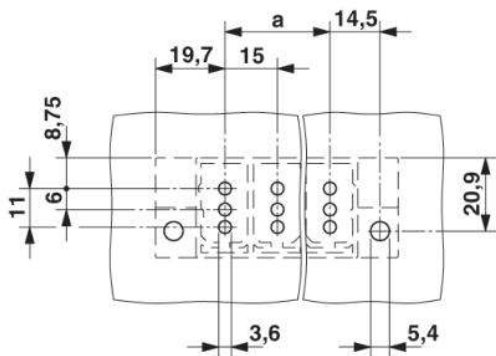

Dimensioned drawing

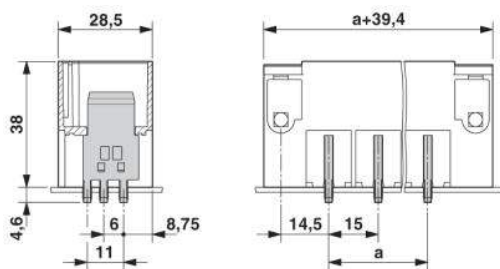

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;