

4-Bit Level Shifting Buffer/Transceiver with Configurable Dual Supply Voltage with Advanced Package Solution


Features

- Operation Voltage: $1.65V \leq V_{CCA} \leq 3.6V$
 $2.3V \leq V_{CCB} \leq 5.5V$
 $V_{CCA} \leq V_{CCB}$
- High Speed: $t_{pd} = 5\text{ns}$ typical into 30pF @ 3V V_{CC}
- Power down high-impedance inputs and outputs
- High output drive: $\pm 12\text{mA}$ at 3V V_{CCA}/V_{CCB}
 $\pm 24\text{mA}$ at 5V V_{CCB}
- Industrial operation at -40°C to $+85^\circ\text{C}$
- Packaging (Pb-free & Green available):
 - 16-pin TDFN (ZJ)


Description

Pericom Semiconductor's PI74STX4G4245, a 4-bit noninverting buffer/transceiver, contains two separate supply rails: A port (V_{CCA}), set to operate from 1.8V to 3.3V ; B port (V_{CCB}), set to operate from 2.5V to 5V . The $xA1$ to $xB1$ translation is configured as an unidirectional buffer; the translation between $xA2$ and $xB2$ is bidirectional and its direction is controlled by the $xDIR$ pin. The $xDIR$ pin is supplied by V_{CCB} .

Block Diagram

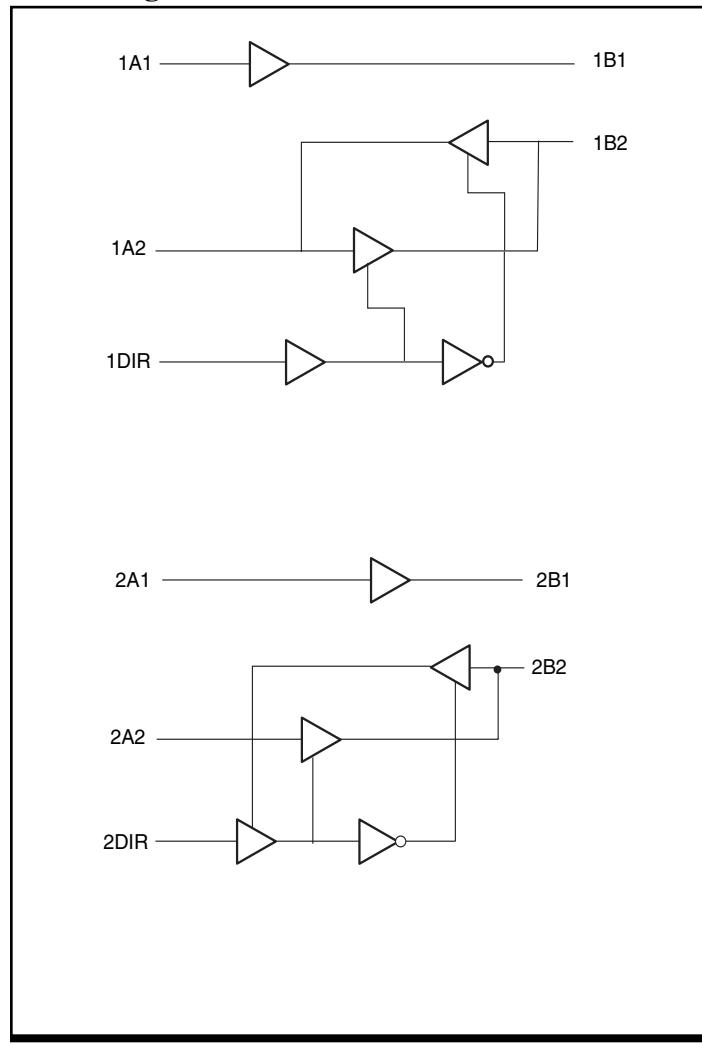

Pin Configuration (TDFN)

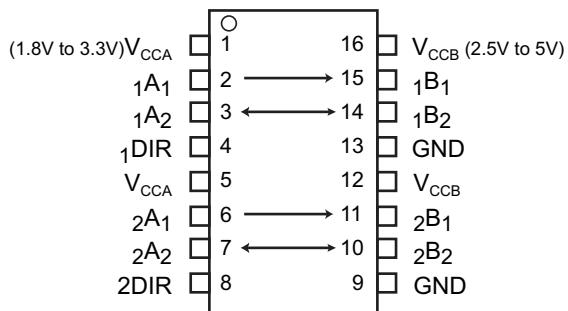

Function Table

xDIR	Input		Output
	DATA		
L		xA2	xB2
H		xA2	xB2
X	xA1		xB1

Pin Description

Pin Name	Description
xDIR	Direction Control
xA1	Data Input
xB1	Data Output
xA2, xB2	Data Input/Output
V_{CCA}, V_{CCB}	Power Supply

Maximum Ratings

(Absolute maximum ratings over operating free-air temperature range from V_{CCB} at 2.5V & V_{CCA} at 1.2V, unless otherwise noted)

Supply voltage range: V _{CCA}	-0.5V to +6V	DC Input Diode Current, I _{IK} (V _O <0)	-50mA
V _{CCB}	-0.5V to +6V	DC Output Diode Current, I _{OK} (V _O <0)	-50mA
Input Voltage Range, V _I :		DC Output Current, (I _{OUT})	±50mA
Input xA1 ⁽¹⁾	-0.5V to +6V	DC V _{CC} or GND Current (I _{CC} /I _{GND}).....	±100mA
I/O xA2 ^(1,2)	-0.5V to V _{CCA} +0.5V	Storage temperature range, T _{TSG}	-65°C to 150°C
I/O xB2 ^(1,2)	-0.5V to V _{CCB} +0.5V	Junction Lead Temperature (I _{OS})	260°C
Output Voltage Range, V _O		Power Dissipation: MSOP	200mW
Output B1 ^(1,2) ...	-0.5V to V _{CCB} +0.5V		

Notes:

Stresses greater than those listed under MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

1. The input negative voltage and output voltage ratings may be exceeded if the input and output current ratings are observed.
2. This value is limited to 6V.

Recommended Operating Conditions for A Port (V_{CCA})⁽¹⁾

Parameter	Description	Test Conditions	Min.	Max.	Units
V _{CCA}	Supply Voltage	V _{CCA} = 1.65V to 1.95V V _{CCA} = 2.3V to 3.6V	1.65	3.6	V
V _{IH}	High-level input voltage		0.7 x V _{CCA}		
V _{IL}	Low-level input voltage		0.7 x V _{CCA}		
V _{IA}	Input Voltage	V _{CCA} = 1.65 to 1.95V V _{CCA} = 2.3V to 3.6V	0	V _{CCA}	
V _{OA}	Output Votage		0	V _{CCA}	
I _{OH}	High-level Output Current	V _{CCA} = 1.65 V to 1.95V		-4	mA
		V _{CCA} = 2.3V to 2.7V		-8	
		V _{CCA} = 3V to 3.6V		-12	
I _{OL}	Low-level Output Current	V _{CCA} = 1.65V to 1.95V		4	
		V _{CCA} = 2.3V to 2.7V		8	
		V _{CCA} = 3V to 3.6V		12	
$\Delta t/\Delta V$	Input transition rise or fall rate	V _{CCA} = 1.65V to 1.95V		20	ns/V
		V _{CCA} = 2.3V to 3.6V		10	
T _A	Operation free-air temperature		-40	85	°C

Notes:

1. To ensure proper device operation, all unused inputs must be held at V_{CCA} or GND.

Recommended Operating Conditions for B Port (V_{CCB})⁽¹⁾

Paramaters	Description		Test Conditions	Min.	Max.	Units	
V _{CCB}	Supply Voltage			2.3	5.5	V	
V _{IH}	High-level input voltage		V _{CCB} = 2.3V to 5.5V	0.7 x V _{CCB}			
	Data Inputs						
	DIR pin						
V _{IL}	Low-level input voltage		V _{CCB} = 2.3V to 5.5V		0.3 x V _{CCB}		
	Data Inputs						
	DIR pin						
V _{IB}	Input Voltage			0	V _{CCB}		
V _{OB}	Output Votage			0	V _{CCB}		
I _{OH}	High-level Output Current		V _{CCB} = 2.3 V to 2.7V		-8	mA	
			V _{CCB} = 3V to 3.6V		-12		
			V _{CCB} = 4.5V to 5.5V		-24		
I _{OL}	Low-level Output Current		V _{CCB} = 2.3V to 2.7V		8		
			V _{CCB} = 3V to 3.6V		12		
			V _{CCB} = 4.5V to 5.5V		24		
Δt/ΔV	Input transition rise or fall rate		V _{CCB} = 2.3V to 5.5V		10	m/V	
T _A	Operation free-air temperature			-40	85	°C	

Notes:

1. To ensure proper device operation, all unused inputs must be held at V_{CCB} or GND.

Electrical Characteristics (Over recommended operating free-air temperature range)

Parameters	Test Conditions	V _{CCA} ⁽¹⁾	V _{CCB} ⁽¹⁾	Min.	Typ. ⁽²⁾	Max.	Units
V _{OHA} (B to A)	I _{OH} = -100uA	1.65V to 3.6V	2.3V ≤ V _{CCB} ≤ 5.5V and V _{CCB} ≥ V _{CCA}	V _{CCB} -0.1			V
	I _{OH} = -4mA	1.65V		1.3			
	I _{OH} = -8mA	2.3V		1.8			
	I _{OH} = -12mA	3.0V		2.4			
V _{O LA} (B to A)	I _{OH} = 100uA	1.65V to 3.6V	2.3V to 5.5V	V _{CCB} -0.1	0.1		V
	I _{OH} = 4mA	1.65V			0.24		
	I _{OH} = 8mA	2.3V			0.3		
	I _{OH} = 12mA	3.0V			0.4		
V _{OHB} (A to B)	I _{OH} = -100uA	1.65V ≤ V _{CCA} ≤ 3.6V and V _{CCB} ≥ V _{CCA}	2.3V to 5.5V	V _{CCB} -0.1			V
	I _{OH} = -8mA		2.3V	1.8			
	I _{OH} = -12mA		3.0V	2.4			
	I _{OH} = -24mA		4.5V	3.8			
V _{O LB} (A to B)	I _{OH} = 100uA	2.3V to 5.5V	2.3V to 5.5V		0.1		μA
	I _{OH} = 8mA		2.3V		0.3		
	I _{OH} = 12mA		3.0V		0.4		
	I _{OH} = 24mA		4.5V		0.55		
I _I ⁽³⁾	V _I = V _{CCA} /V _{CCB} or GND	1.65V to 3.6V and V _{CCB} ≥ V _{CCA}	2.3V to 5.5V and V _{CCB} ≥ V _{CCA}			±5	μA
I _{OFF}	V _I or V _O = V _{CCB} or GND	0V	0 to 5.5V			±10	
	V _I or V _O = V _{CCA} or GND	0 to 3.6V	0V			±10	
I _{ICCA}	V _I = V _{CCA} or GND, I _O = 0	1.65V to 3.6V and V _{CCB} ≥ V _{CCA}	2.3 to 5.5V and V _{CCB} ≥ V _{CCA}			10	
I _{ICCB}	V _I = V _{CCB} or GND, I _O = 0					10	
C _I	A1, DIR	V _I = V _{CCA} or GND	1.8V	3.3V	4.5		pF
C _O	B1	V _O = V _{CCB} or GND	1.8V	3.3V	4.5		
C _{IO}	A2, B2	V _I or V _O = V _{CCA} /V _{CCB} or GND	1.8V	3.3V	6.0		

Notes:

1. When $1.65 \leq V_{CCA} \leq 1.95V$, V_{CCB} can not be greater than 3.6V
2. All Typical values are at $T_A = 25^\circ C$
3. For I/O ports, the parameter I_I includes the output leakage current.

Switching Characteristics for $V_{CCA} = 1.8V \pm 0.15V$

(Over recommended operating free-air temperature range, see figure 1)

Parameter	From (Input)	To (Output)	$V_{CCB} = 2.5V \pm 0.2V$		$V_{CCB} = 3.3V \pm 0.3V$		Units
			Min.	Max.	Min.	Max.	
t_{PHL}	A	B	1.0	8	1.0	8	ns
t_{PLH}			1.0	8	1.0	8	
t_{PHL}	B	A	1.0	7	1.0	7	ns
t_{PLH}			1.0	7	1.0	7	
$t_{SK(O)}$				1.5			1

Switching Characteristics for $V_{CCA} = 2.5V \pm 0.2V$

(Over recommended operating free-air temperature range, see figure 1)

Parameter	From (Input)	To (Output)	$V_{CCB} = 2.5V \pm 0.2V$		$V_{CCB} = 3.3V \pm 0.3V$		$V_{CCB} = 5V \pm 0.5V$		Units
			Min.	Max.	Min.	Max.	Min.	Max.	
t_{PHL}	A	B	1.0	7	1.0	6.5	1.0	6	ns
t_{PLH}			1.0	7	1.0	6.5	1.0	6	
t_{PHL}	B	A	1.0	6	1.0	6	1.0	5	ns
t_{PLH}			1.0	6	1.0	6	1.0	5	
$t_{SK(O)}$				1.5			1		1


Switching Characteristics for $V_{CCA} = 3.3V \pm 0.3V$

(Over recommended operating free-air temperature range, see figure 1)

Parameter	From (Input)	To (Output)	$V_{CCB} = 3.3V \pm 0.3V$		$V_{CCB} = 5V \pm 0.5V$		Units
			Min.	Max.	Min.	Max.	
t_{PHL}	A	B	1.0	5	1.0	5	ns
t_{PLH}			1.0	5	1.0	5	
t_{PHL}	B	A	1.0	5	1.0	5	ns
t_{PLH}			1.0	5	1.0	5	
$t_{SK(O)}$					1		1


AC Loading and Waveforms

V_{CCA/B}	C_L	R_L
1.8 ± 0.15V	15pF	1KΩ
2.5V ± 0.2V	15pF	500Ω
3.0V to 3.6V	30pF	500Ω
5V ± 0.5V	50pF	500Ω

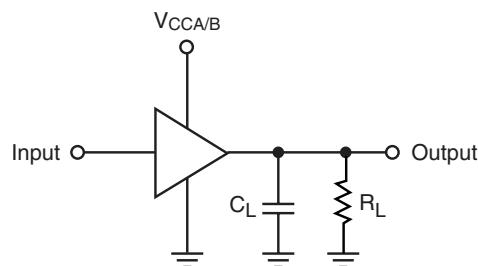

C_L includes load and stray capacitance
Input PRR = 1.0 MHz; t_W = 500ns

Figure 1. AC Test Circuit

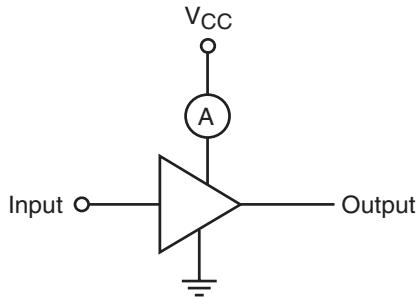

Input = AC Waveform; $t_r = t_f = 1.8\text{ns}$;
PRR = 10 MHz; Duty Cycle = 50%

Figure 2. ICCD Test Circuit


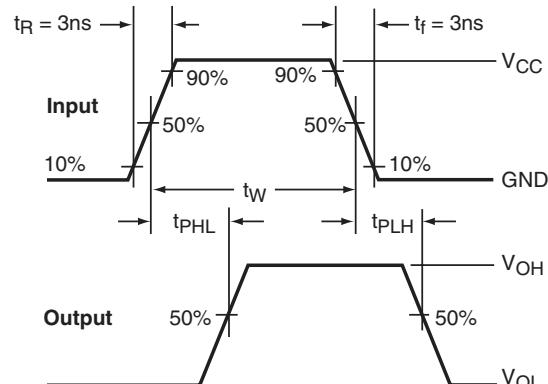


Figure 3. AC Waveforms

Packaging Mechanical: 16-pin TDFN

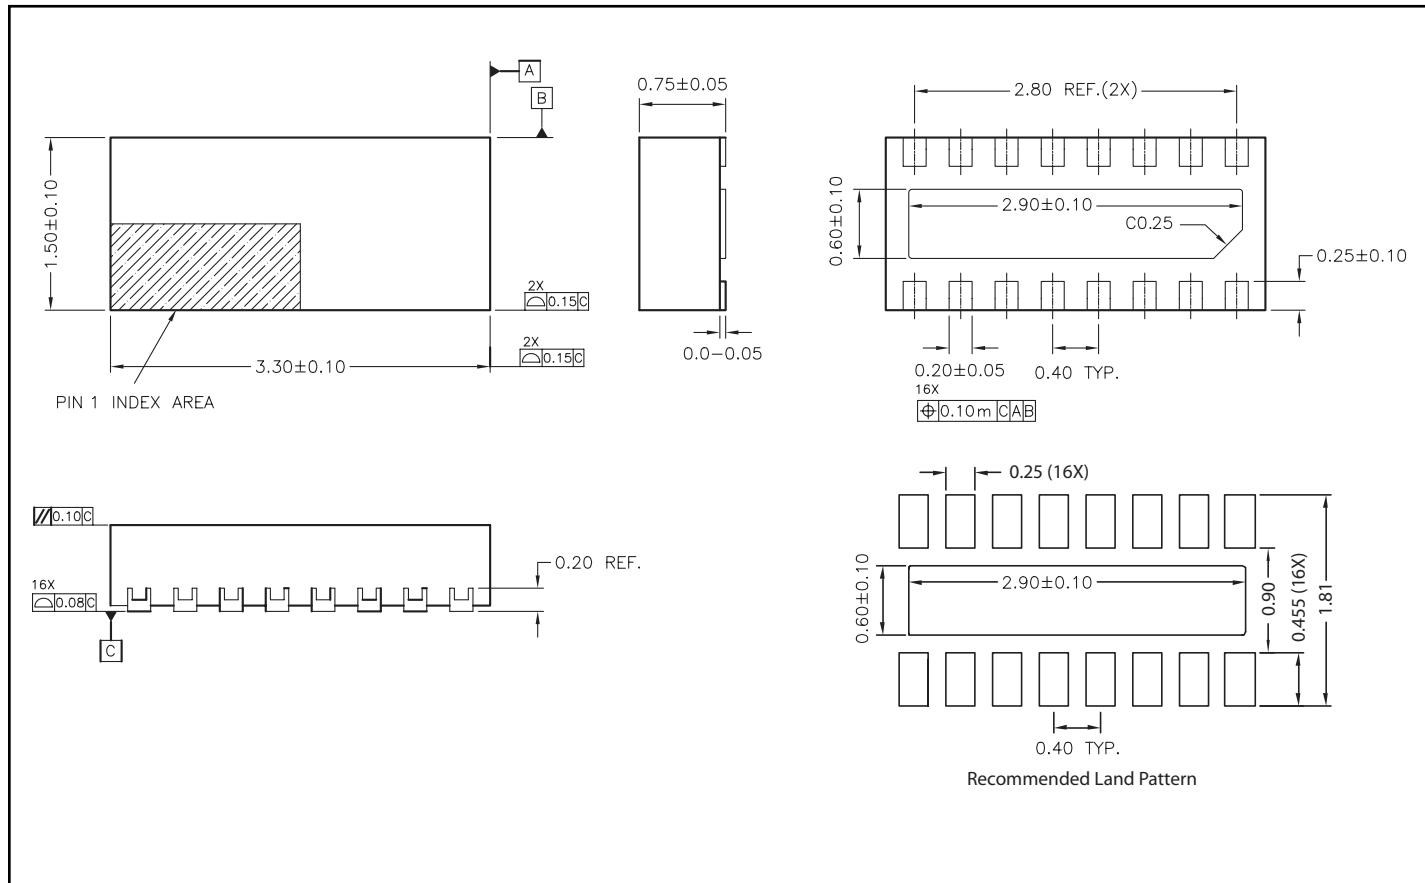

Ordering Information

Ordering Code	Package Code	Package Type	Top Mark
PI74STX4G4245ZJE	ZJ	Pb-free & Green, 16-pin TDFN	4G

Notes:

- Thermal Characteristics can be found on the web at www.pericom.com/packaging/
- E = Pb-free and Green
- Adding an X suffix= Tape/Reel