

Single Port Isolation Transformer

AT3974


- 10/100 Base-T for Ethernet Applications
- Standard Operating Temperature range: -0°C to +70°C
- Maximum reflow temperature: 250°C/-5°C for 20-40 seconds (Refer to IPC/JEDEC J-STD-02C Standard)



Electrical Specifications @25°C						
Turn Ratio @ 10KHz, 20mV (±2%)		LP @ 100KHz, 20mV (uH min)			CW/W @ 100KHz, 20mV (pF max)	
(1-3) TO (16-4)	(6-8) TO (11-9)	(1 - 3)	(11 - 9)	15- (16-14)	(1-3) TO (16-4)	(6-8) TO (11-9)
1:1	1:2	98	70	42	8	12
Leakage Inductance @ 100KHz, 20mV (uH Max)		DC Resistance @ 10KHz, 20mV (Ω Max)				Isolation Voltage (Vrms MIN)
(1-3), (16-14 short)	(6-8), (11-9 short)	(1-3), (16-14)	(6-8), (11-9)	(15-16), (16-14)	(10-11), (10-9)	1500
0.30	0.20	0.6	0.6	0.6	0.6	

All specifications subject to change without notice.

MECHANICAL

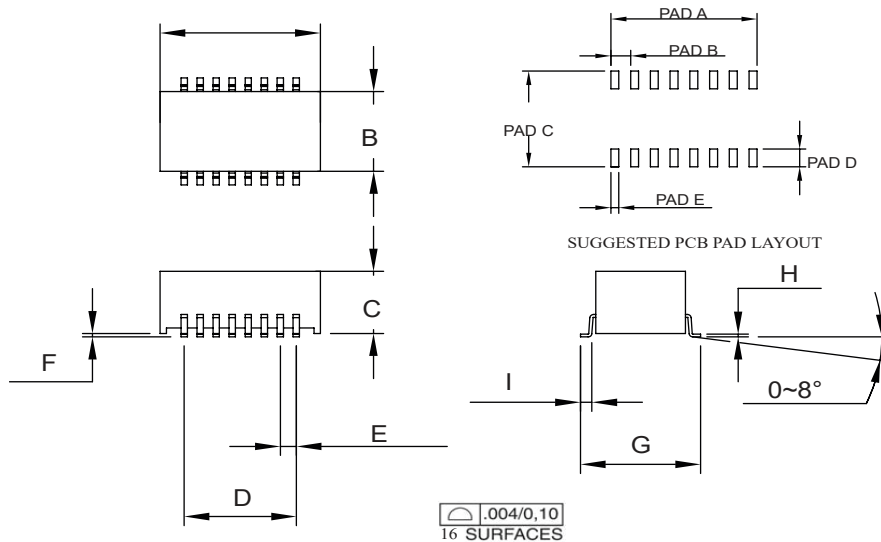

- Unit : mm/inch
- A=12.80/0.504
 - B=6.80/0.268
 - C=6.20 max/0.244 max
 - D=8.89/0.350
 - E=1.27/0.050
 - F=0.25/0.010
 - G=9.40/0.370
 - H=0.25/0.010
 - I=0.90/0.035
 - PDA-A=9.53/0.375
 - PDA-B=1.27/0.050
 - PDA-C=10.50/0.413
 - PDA-D=1.70/0.067
 - PDA-E=0.76/0.030

SCHEMATICS

