

WTL2449 External Dipole Antenna

Low-cost WLAN Dipole Antenna



WTL2449C



WTL2449S Snap-In Mount

WTL2449 EXTERNAL DIPOLE ANTENNA

WTL 2449 External dipole antennas are designed for WLAN system requirements with radiation patterns that are omnidirectional. The antenna has center-fed sleeve dipoles and is available with RP-SMA Male (Plug) mount or snap-in mount.

FEATURES

- Covers 2.4/5 GHz frequency band
- Omnidirectional gain patterns
- Conformance to RoHS
- Center-fed coaxial dipole with either RP-SMA (Plug) connectors or a pigtail terminated with IPEX MHF plug connector

MARKETS

- 802.11 b/g/n WLAN applications
- Bluetooth®

Specifications	WTL2449S	WTL2449C
Frequency	2.4 to 2.5 GHz, 4.9 to 5.875 GHz	
Gain	2 dBi @ 2.4 GHz, 2.7 dBi @ 5 GHz	2.61 dBi @ 2.4 GHz, 2.61 dBi @ 5 GHz
Average Efficiency	75% @ 2.4 GHz, 60% @ 5 GHz	70% @ 2.4 GHz, 70% @ 5 GHz
Polarization	Vertical, omnidirectional radiation pattern	
Nominal Impedance	50 ohms	
VSWR	2:1 at 2.4 GHz band, 2.3:1 at 5 GHz band	2:1 max across the bands
Size	L70 X Ø10 (right angle), L96 X Ø10 (straight)	

Part No.	Cable type and Length	Connector
WTL2449SA1-10UFL	1.13 coaxial cable (Lc=100 mm)	IPEX MHF plug
WTL2449SA1-15UFL	1.13 coaxial cable (Lc=150 mm)	IPEX MHF plug
WTL2449CQ1-FRSMM	RP-SMA Male (plug)	

Lc : Length of the cable

global solutions: local support.™

Americas: +1.847.839.6907
IAS-AmericasEastSales@lairdtech.com

Europe: +1.32.80.7866.12
IAS-EUSales@lairdtech.com

Asia: +1.65.6.243.8022
IAS-AsiaSales@lairdtech.com


www.lairdtech.com

WTL2449 External Dipole Antenna


Low-cost WLAN Dipole Antenna

Innovative Technology
for a Connected World


WTL2449S Return Loss Plot

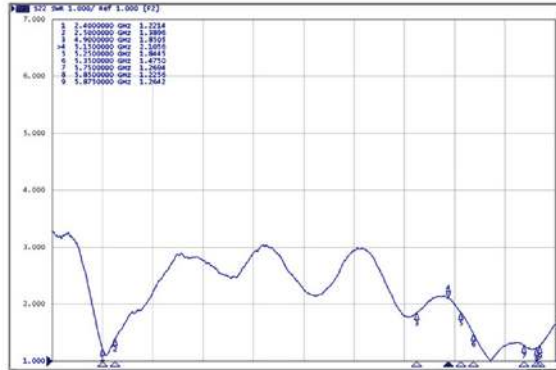


WTL2449C Return Loss Plot

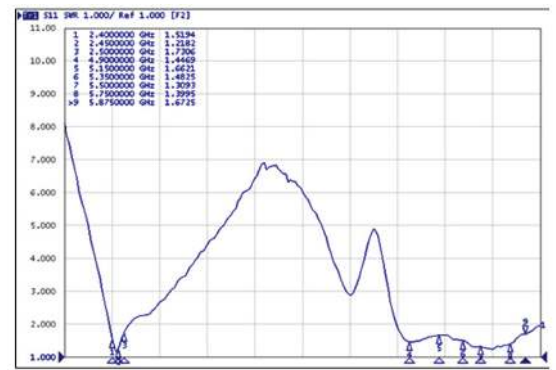

WTL2449S Typical Radiation Patterns

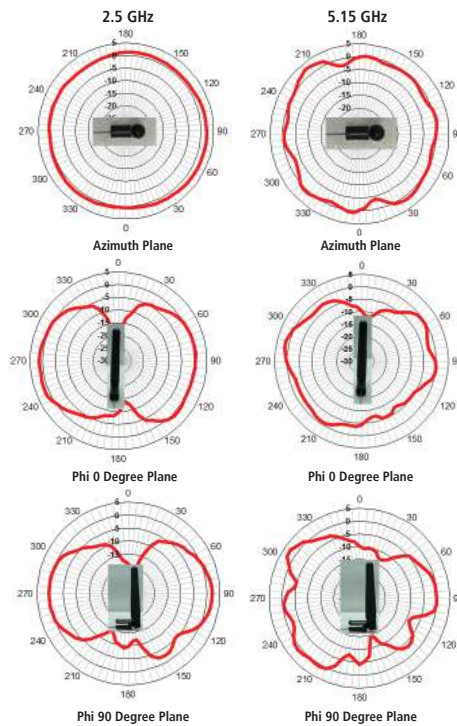

WTL2449C Typical Radiation Patterns

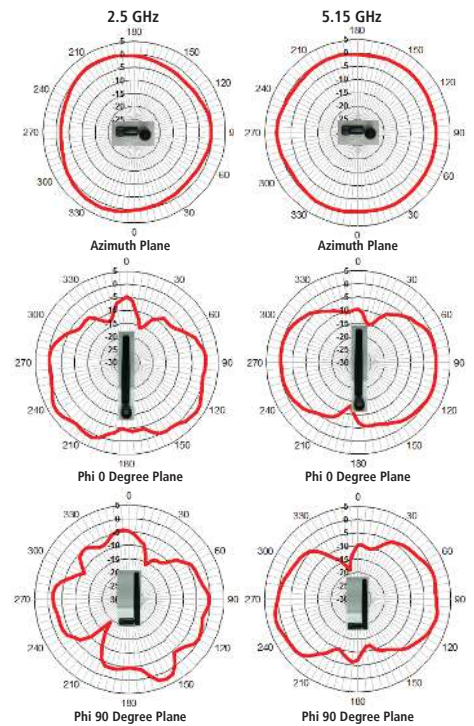

ANT-DS-WTL2449 1111

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials rests with the end user, since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2011 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trade marks or registered trade marks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights.