

# Inductors(Coil) For Power Supply SMD

## VLP Series VLP56 Type

### FEATURES


- This is an SMD power inductor for power supplies that has an open magnetic path construction based on a low-height drum core (upright).
- User terminals are contact-formed on the bottom of the drum core using copper (finished with tin plating).
- It uses crosswise windings and supports large currents.
- It is lead-free compatible.
- With several variations in drum core height, users can choose the perfect product for their application.



### APPLICATIONS

- LCD modules
- Cell phones
- Hard drives

### SHAPES AND DIMENSIONS

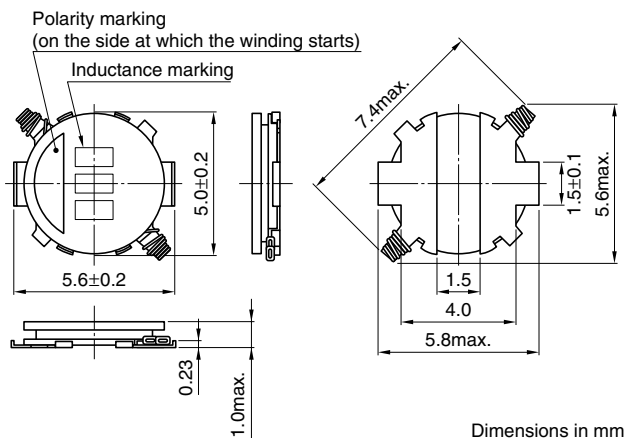

### ELECTRICAL CHARACTERISTICS


Part No.	Inductance ( $\mu\text{H}$ )	Inductance tolerance (%)	Test frequency (kHz)	DC resistance ( $\Omega$ )max.	Rated current(A)*	
					Based on inductance change	Based on temperature rise
VLP5610T-2R7M1R0	2.7	$\pm 20\%$	100	0.17	1.26 max.	1.05 typ.
VLP5610T-4R7MR90	4.7	$\pm 20\%$	100	0.24	1.08 max.	0.90 typ.
VLP5610T-6R8MR80	6.8	$\pm 20\%$	100	0.30	0.90 max.	0.80 typ.
VLP5610T-100MR65	10.0	$\pm 20\%$	100	0.45	0.72 max.	0.65 typ.
VLP5610T-150MR52	15.0	$\pm 20\%$	100	0.71	0.63 max.	0.52 typ.
VLP5610T-220MR45	22.0	$\pm 20\%$	100	0.96	0.50 max.	0.45 typ.
VLP5610T-330MR36	33.0	$\pm 20\%$	100	1.47	0.41 max.	0.36 typ.
VLP5610T-470MR29	47.0	$\pm 20\%$	100	1.93	0.36 max.	0.29 typ.

\* Rated current: The rated current is the smaller of the values given based on the rate of inductance change (10% decrease from the initial value) or the temperature rise (temperature rise of  $40^\circ\text{C}$  caused by the heat generated by the product itself). Please note that the current applied must be DC.

# Inductors(Coil) For Power Supply SMD

## VLP Series VLP56 Type

### TYPICAL ELECTRICAL CHARACTERISTICS INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS

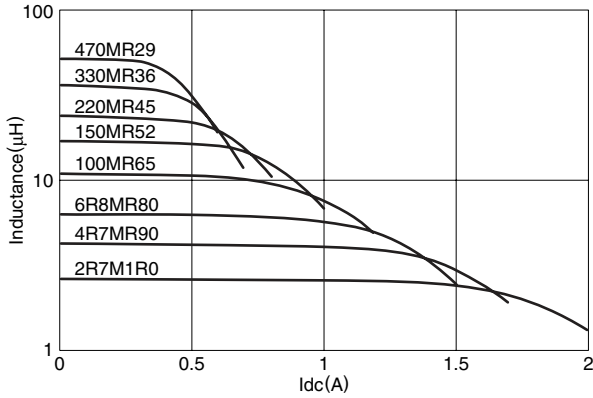

### TEMPERATURE RISE CHARACTERISTICS

