



- High Chemical Resistance
- Low Outgassing
- Halogen Free
- Very Light Weight
- V-O Flammability Rating
- Wear Resistant
- High Strength Alternative to Fluoropolymers

Put-Ups

Nominal Size	Part #	Expansion Range		Bulk Spool	Shop Spool	Available Colors	Lbs/100'
		Min	Max				
1/8"	PKN0.13BK	1/16"	5/16"	1,000'	225'	Black (BK)	0.16
1/4"	PKN0.25BK	7/64"	9/16"	1,000'	200'	Black (BK)	0.19
3/8"	PKN0.38BK	5/32"	5/8"	500'	125'	Black (BK)	0.31
1/2"	PKN0.50BK	3/16"	15/16"	500'	100'	Black (BK)	0.44
5/8"	PKN0.63BK	1/4"	1 1/4"	500'	100'	Black (BK)	0.51
3/4"	PKN0.75BK	3/8"	1 3/8"	250'	75'	Black (BK)	0.64
1"	PKN1.00BK			250'	65'	Black (BK)	0.71
2"	PKN2.00BK			200'	50'	Black (BK)	2.14
2 1/2"	PKN2.50BK			200'	50'	Black (BK)	


Call for more size availability

Secures Performance Of Sensitive Items in Challenging Environments

Similar to PPS, but with a substantially expanded operating temperature range, PEEK (PolyEtherEther-Ketone) is a high performance advanced polymer with outstanding physical properties. PEEK is inherently flame retardant, with a V-0 flammability rating, will withstand continuous use in superheated water or steam up to 500°F, and resists most acids, solvents and bases. PEEK is FDA approved as a food contact product, resists damage from radiation and will continue to perform in UHV (Ultra High Vacuum) environments. PEEK is extensively used in the aerospace, automotive, teletronic and chemical process industries, and is considered an advanced biomaterial used in medical implants and other biomedical applications. PEEK will withstand thousands of sterilization cycles without damage or degradation. Flexo PEEK expandable sleeving is tightly braided from 10 mil filaments of pure, unfilled PEEK polymer. The sleeving expands to fit over connectors and splices, and provides a full coverage over wires hoses and cable bundles in advanced engineering applications.




Cut Cleanly
Hot Knife

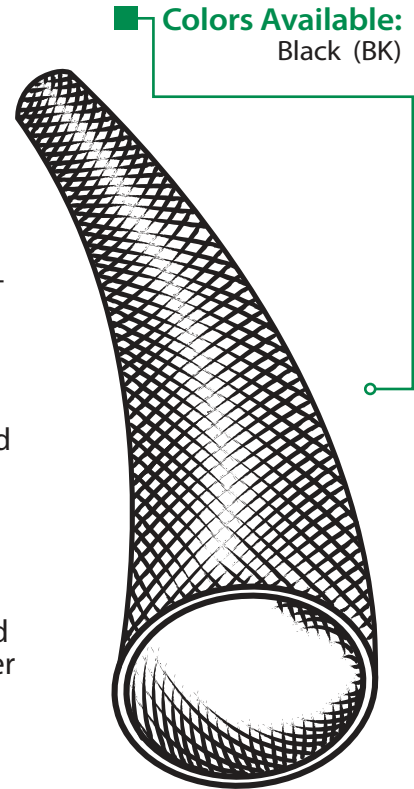

Colors Available:
Black (BK)

Material	Polyetheretherketone
Grade	PKN
Monofilament Diameter	.010"
Drawing Number	TF001PK-WD

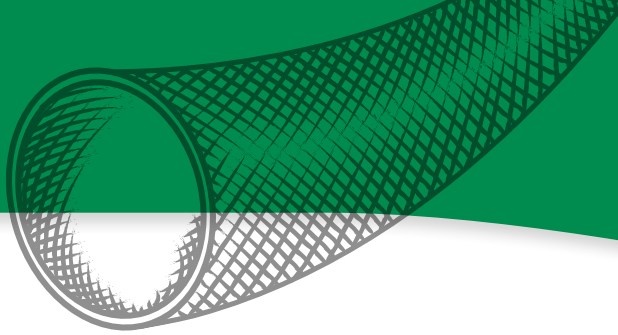

FLAMMABILITY

Rating _____ V-O

CHEMICAL RESISTANCE

1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

Aromatic Solvents _____	1
Aliphatic Solvents _____	1
Chlorinated Solvents _____	1
Weak Bases _____	1
Salts _____	1
Strong Bases _____	3
Salt Water 0-S-1926 _____	1
Hydraulic Fluid MIL-H-5606 _____	1
Lube Oil _____	1
De-Icing Fluid MIL-A-8243 _____	1
Strong Acids _____	3
Strong Oxidants _____	1
Esters/Ketones _____	1
UV Light _____	1
Petroleum _____	1
Fungus ASTM G-21 _____	1
Halogen Free _____	Yes
RoHS _____	Yes

Melt Point
ASTM D-2117
633°F (334°C)

Maximum Continuous
MIL-I-23053
500°F (260°C)

Minimum Continuous
-94°F (-70°C)



PHYSICAL PROPERTIES

Monofilament Diameter _____	.010"
Recommended Cutting _____	Hot Knife
Colors _____	1
Wall Thickness _____	.025"
Abrasion Resistance _____	Med
Tensile Strength _____	13,300 ASTM D638 (PSI)
Specific Gravity ASTM D-792 _____	1.3
Water Absorption % _____	<0.05 ASTM D-570
Elongation _____	50 ASTM D638 (%)
Electrical:	
Dielectric Strength _____	>500 ASTM D149 (V/Mil)
Volume Resistivity _____	>4.9x10 ¹⁶ ASTM D257 (ohm-cm)
Outgassing _____	Low

www.techflex.com