

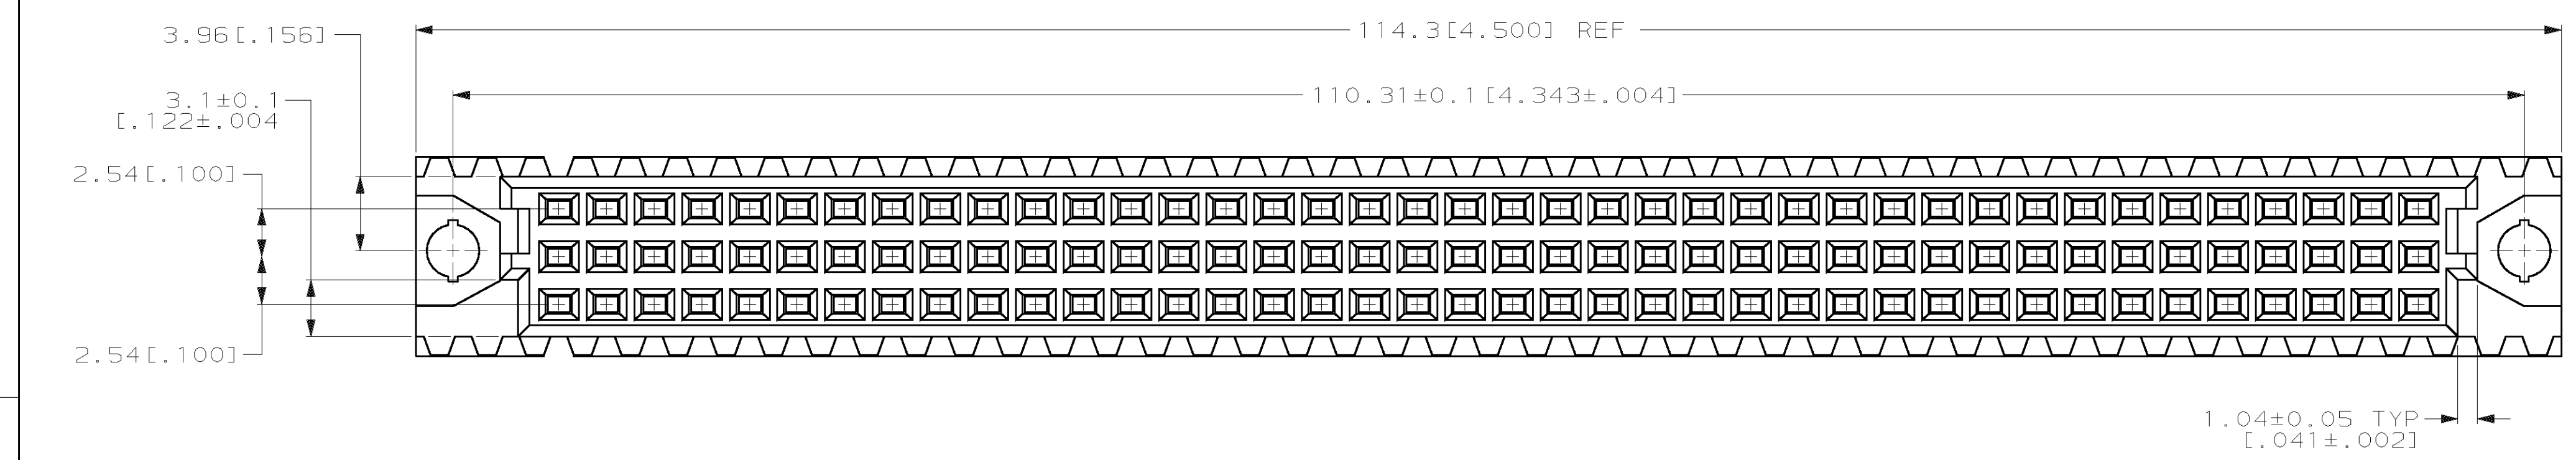
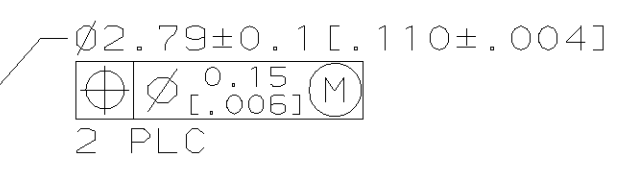
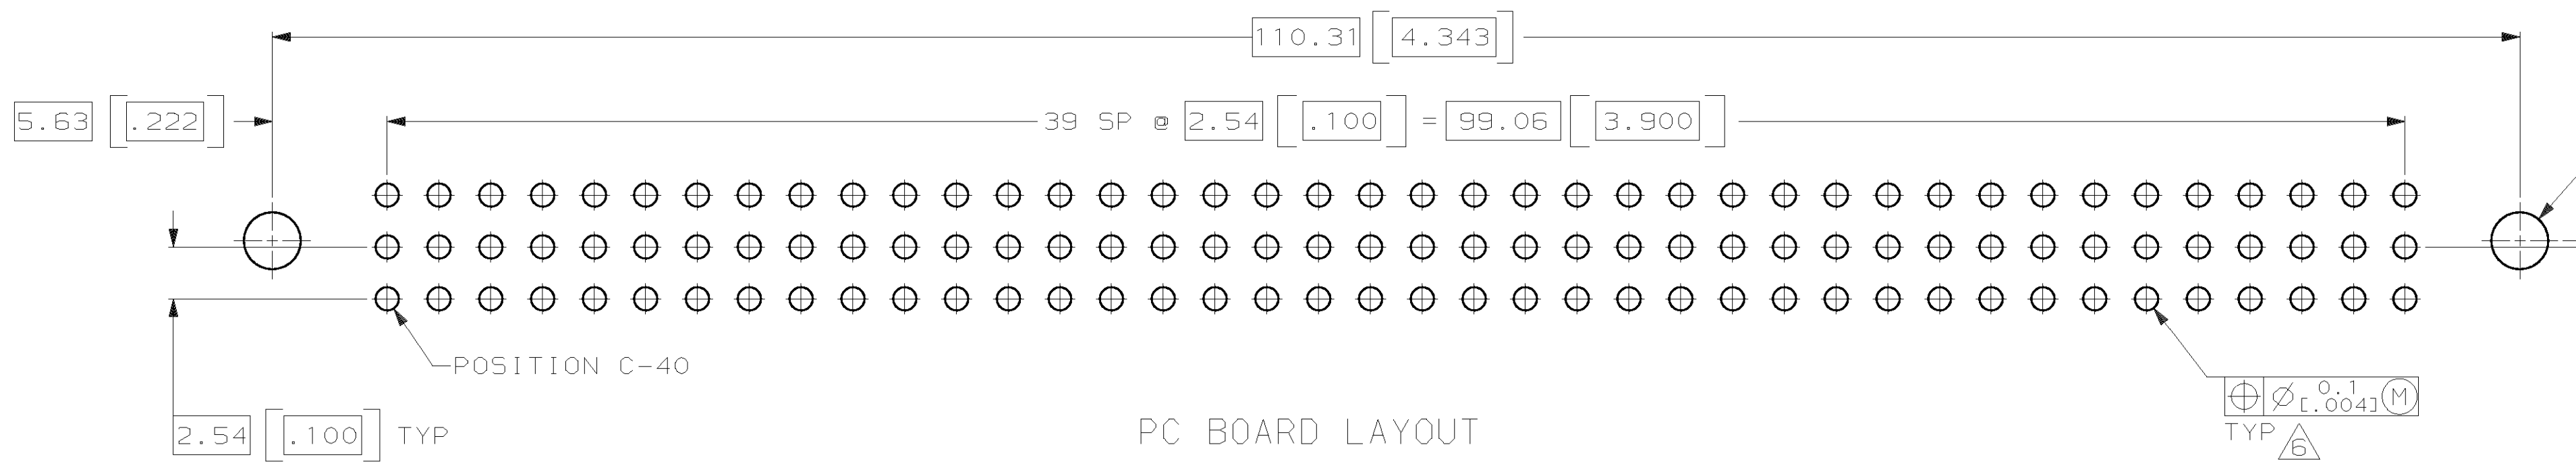
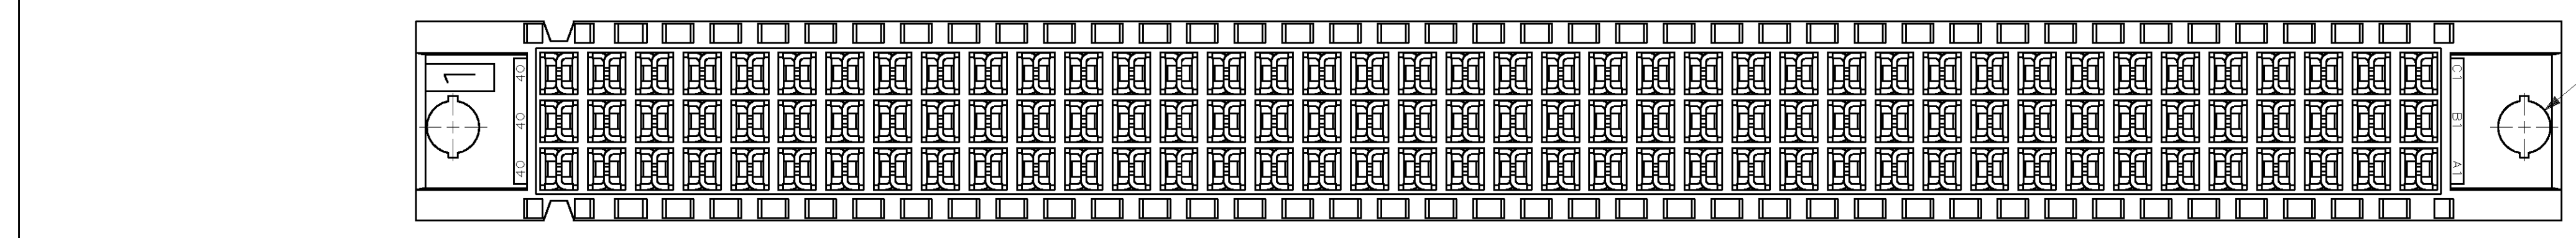


LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
AD	25				E	EC 0010-1434-95	1/18/96	RAP
					F	EC 0010-1486-95	4/1/96	CR
					G	REV PER EC OUTB-0367-00	04 JAN 01	CR

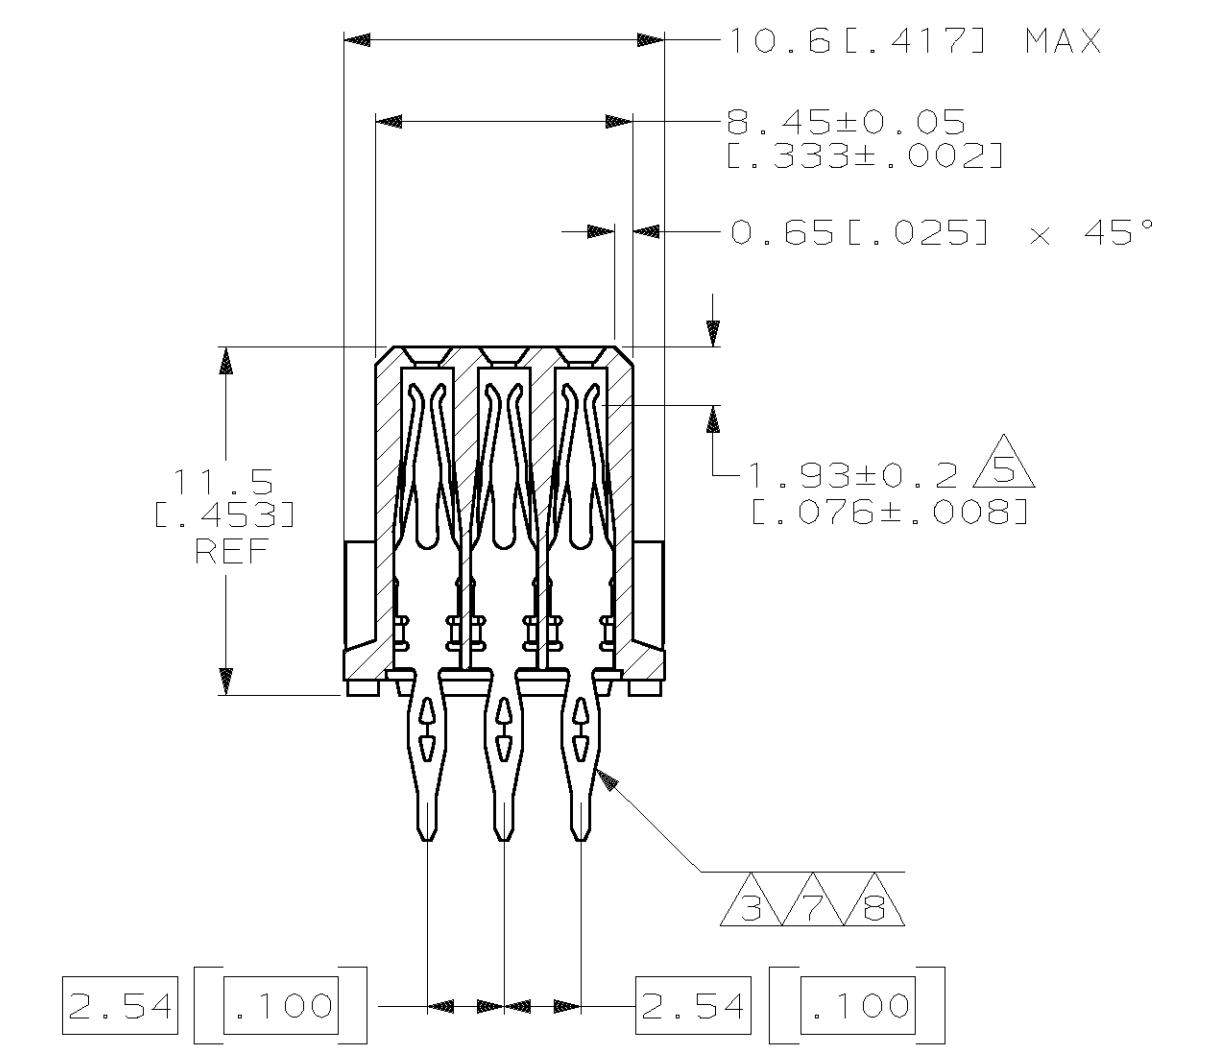

- △1 HOUSING MATERIAL: GLASS-FILLED POLYESTER. COLOR: GRAY.
- △2 CONTACT MATERIAL: PHOSPHOR BRONZE.
- △3 CONTACT FINISH: 0.00076 [.000030] GOLD IN CONTACT AREA. 0.00127 [.000050] NICKEL UNDERPLATE ALL OVER. TIN-LEAD ON POSTS.
- △4 PART NUMBER, DATE CODE IDENTIFICATION, CSA LOGO IN THIS APPROXIMATE AREA.
- △5 POINT OF MEASUREMENT FOR GOLD.
- △6 ACTION PIN POSTS REQUIRE 1.57 [.062] MIN THICK PC BOARD. RECOMMENDED PC BOARD HOLES ARE Ø1.151 ± 0.02 [.0453 ± .001] DRILLED HOLE WITH 0.02-0.07 [.001-.003] COPPER AND 0.008 [.0003] MIN TIN-LEAD PLATING. FINISHED HOLE AFTER PLATING, Ø0.94-1.09 [.037-.043].
- △7 CONTACT FINISH: DIN 41612 CLASS 3 IN CONTACT AREA. 0.00127 [.000050] NICKEL UNDERPLATE ALL OVER. TIN-LEAD ON TAILS.
- △8 CONTACT FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. 0.00127 [.000050] NICKEL UNDERPLATE ALL OVER. TIN-LEAD ON TAILS.

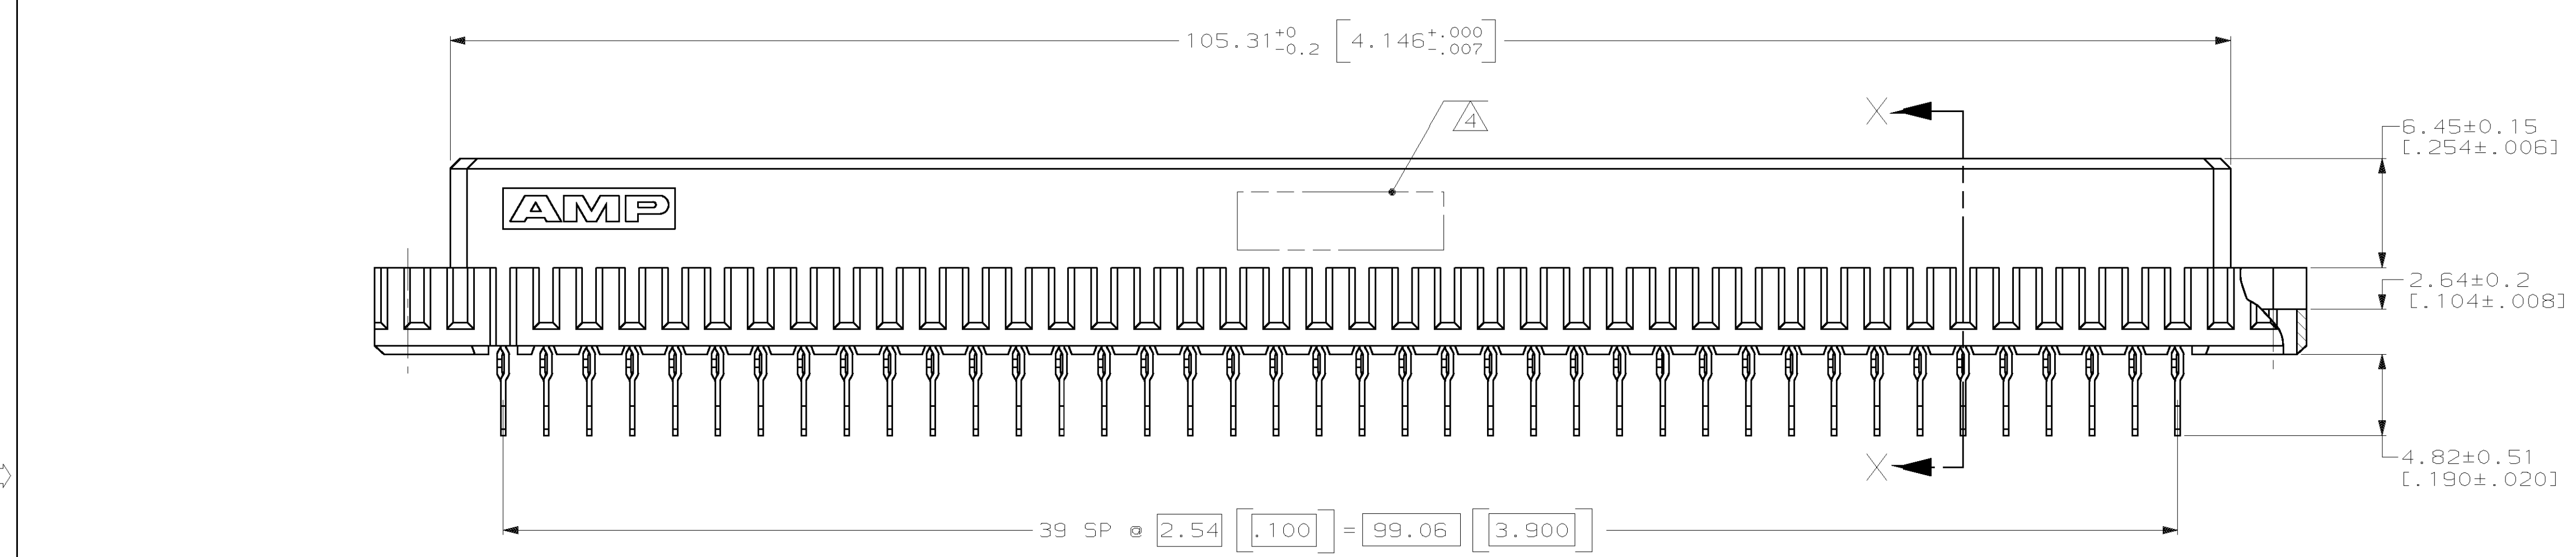

NOTES	POSITIONS LOADED	C	B	A	NO. OF LOADED POSITION	ASSY PART NUMBER
OBSELETE	1 THRU 40	X	X	X	120	535079-9
	1 THRU 40	X	X	X	120	535079-5
SUPERSEDED BY 535079-5	1 THRU 40	X	X	X	120	535079-4

DR	CHK	APPD	NAME	FINISH	APPLICATION SPEC	SIZE	FSCM NO	DRAWING NO
L. BRINER	J. BROWN	J. BROWN	J. BROWN	CONT	-	D	00779	535079
5/11/89	6/26/89	6/26/89	6/26/89					
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON:			AMP INCORPORATED Harrisburg, Pa. 17105					
1 PLC DEC ± -			ASSEMBLY, RECEPTACLE, EUROCARD, TOOLLESS PRESSFIT, 120 POSITION					
2 PLC DEC ± 0.13 [.005]			SIZE D 00779 DRAWING NO 535079					
ANGLES ± -			SCALE 4:1 SHEET 1 OF 1					
HSG △			WEIGHT -					
CONT △			CUSTOMER DRAWING					