

Device connector, front mounting - CA-09P1N8A2S00 - 1619970

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Device connector for front wall, straight, shielded: yes, SPEEDCON locking, M23, Number of positions: 8+1, Type of contact: Male connector, Crimp connection, Flat gasket, 4x Ø3.2, Flange dimensions: 25 mm x 25 mm

The figure shows the 6-pos. product version



Key Commercial Data

| | |
|--------------------------------------|----------|
| Packing unit | 1 pc |
| Weight per Piece (excluding packing) | 20.0 g |
| Custom tariff number | 85366990 |
| Country of origin | Germany |

Technical data

Temperature range

| | |
|---------------------------------|-------------------|
| Ambient temperature (operation) | -40 °C ... 125 °C |
|---------------------------------|-------------------|

Data of the insulating body

| | |
|--|------------------|
| Coding | N |
| Insulator material | PA 66 |
| Contact connection method | Crimp connection |
| Type of contacts | Male connector |
| Number of positions | 9 |
| Contact diameter of power contacts | 1 mm |
| Nominal current per power contact at 25°C | 8 A |
| Nominal voltage, power contact | 300 V |
| Contact diameter of signal contacts | 2 mm |
| Nominal current per signal contact at 25°C | 20 A |
| Nominal voltage, signal contact | 300 V |
| Overvoltage category | II |

Device connector, front mounting - CA-09P1N8A2S00 - 1619970

Technical data

Data of the insulating body

| | |
|---------------------|---|
| Degree of pollution | 3 |
|---------------------|---|

Housing data

| | |
|--|------------------|
| Housing material | CuZn |
| Flange dimensions | 25 mm x 25 mm |
| Type of locking | SPEEDCON locking |
| Degree of protection (when plugged in) | IP67 |
| Thread type | M23 |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27143424 |
| eCl@ss 5.1 | 27143424 |
| eCl@ss 6.0 | 27143424 |
| eCl@ss 7.0 | 27440209 |
| eCl@ss 8.0 | 27440103 |

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002635 |
| ETIM 5.0 | EC002061 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 43172015 |
| UNSPSC 7.0901 | 43201404 |
| UNSPSC 11 | 43172015 |
| UNSPSC 12.01 | 43201404 |
| UNSPSC 13.2 | 43201404 |

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / EAC

Device connector, front mounting - CA-09P1N8A2S00 - 1619970

Approvals

Ex Approvals

Approvals submitted

Approval details


UL Recognized

cUL Recognized


EAC

Drawings


Schematic diagram



Dimensional drawing

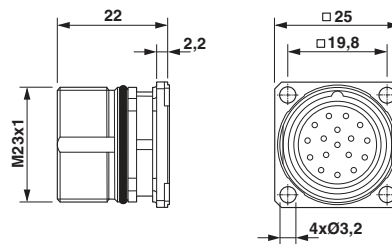

Dimensional drawing

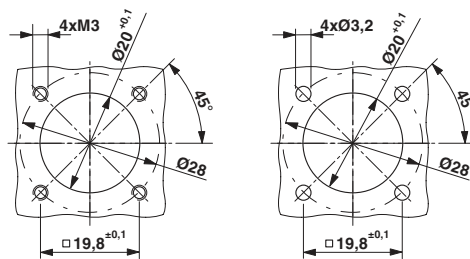

Installation dimensions

