

# Designated client product

This product will be discontinued its production in the near term.  
And it is provided for customers currently in use only, with a time limit.  
It can not be available for your new project. Please select other new or  
existing products.  
For more information, please contact our sales office in your region.

New Japan Radio Co.,Ltd.

[www.njr.com](http://www.njr.com)

## 3-TERMINAL NEGATIVE VOLTAGE REGULATOR


### ■ GENERAL DESCRIPTION

The NJM7900 series of Monolithic 3-Terminal Negative Voltage Regulators are constructed using the New JRC Planar epitaxial process. These negative regulators are intended as complements to the popular NJM7800 series of positive voltage regulators, and they are available in the same voltage options from  $-5$  to  $-24V$ .

The NJM7900 series employ internal current limiting, safe area protection, and thermal shutdown, making the virtually indestructible.

### ■ PACKAGE OUTLINE

(TO-220F)



1. COMMON
2. IN
3. OUT


**NJM7900FA**

(note) The radiation fin is connected to Pin 2.

### ■ FEATURES

- Internal Short Circuit Current Limit
- Internal Thermal Overload Protection
- Excellent Ripple Rejection
- Guaranteed 1.5A Output Current
- Output Capacitor recommended electrolytic capacitor
- Package Outline TO-220F
- Bipolar Technology

### ■ EQUIVALENT CIRCUIT

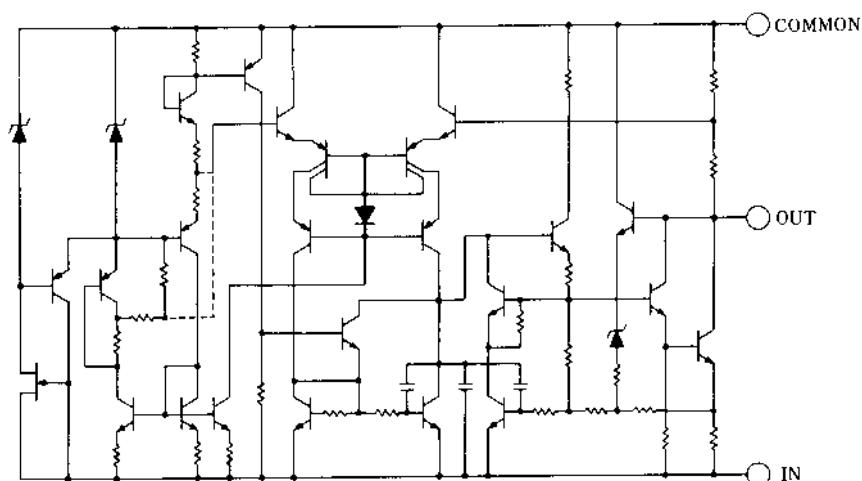

# NJM7900

## ■ ABSOLUTE MAXIMUM RATINGS

( $T_a=25^\circ\text{C}$ )

PARAMETER	SYMBOL	MAXIMUM RATINGS			UNIT
Input Voltage	$V_{IN}$	7905 to 7909 7912 to 7915 7918 to 7924	-35 -35 -40		V
Power Dissipation	$P_D$	$16(T_C \leq 70^\circ\text{C})$			W
Operating Junction Temperature	$T_J$	-40 to +150			$^\circ\text{C}$
Operating Temperature Range	$T_{opr}$	-40 to +85			$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	-40 to +150			$^\circ\text{C}$

## ■ ELECTRICAL CHARACTERISTICS ( $T_j=25^\circ\text{C}$ , $C_{IN}=2.2\mu\text{F}$ , $C_O=1.0\mu\text{F}$ )

Measurement is to be conducted in pulse testing

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
<b>NJM7905FA</b>						
Output Voltage	$V_O$	$V_{IN}=-10\text{V}$ , $I_O=0.5\text{A}$	-4.8	-5.0	-5.2	V
Line Regulation	$\Delta V_O - V_{IN}$	$V_{IN}=-7$ to $-25\text{V}$ , $I_O=0.5\text{A}$	-	5	50	mV
Load Regulation	$\Delta V_O - I_O$	$V_{IN}=-10\text{V}$ , $I_O=0.005$ to $1.5\text{A}$	-	50	80	mV
Quiescent Current	$I_Q$	$V_{IN}=-10\text{V}$ , $I_O=0\text{mA}$	-	2.2	5.0	mA
Average Temperature Coefficient of Output Voltage	$\Delta V_O/\Delta T$	$V_{IN}=-10\text{V}$ , $I_O=5\text{mA}$	-	-0.4	-	mV/ $^\circ\text{C}$
Ripple Rejection	RR	$V_{IN}=-10\text{V}$ , $I_O=0.5\text{A}$ , $e_{in}=2V_{P-P}$ , $f=120\text{Hz}$	54	60	-	dB
Output Noise Voltage	$V_{NO}$	$V_{IN}=-10\text{V}$ , $I_O=0.5\text{A}$ , $BW=10\text{Hz}$ to $100\text{kHz}$ ,	-	100	-	$\mu\text{V}$
<b>NJM7906FA</b>						
Output Voltage	$V_O$	$V_{IN}=-11\text{V}$ , $I_O=0.5\text{A}$	-5.75	-6.0	-6.25	V
Line Regulation	$\Delta V_O - V_{IN}$	$V_{IN}=-8$ to $-25\text{V}$ , $I_O=0.5\text{A}$	-	5	60	mV
Load Regulation	$\Delta V_O - I_O$	$V_{IN}=-11\text{V}$ , $I_O=0.005$ to $1.5\text{A}$	-	50	90	mV
Quiescent Current	$I_Q$	$V_{IN}=-11\text{V}$ , $I_O=0\text{mA}$	-	2.2	5.0	mA
Average Temperature Coefficient of Output Voltage	$\Delta V_O/\Delta T$	$V_{IN}=-11\text{V}$ , $I_O=5\text{mA}$	-	-0.5	-	mV/ $^\circ\text{C}$
Ripple Rejection	RR	$V_{IN}=-11\text{V}$ , $I_O=0.5\text{A}$ , $e_{in}=2V_{P-P}$ , $f=120\text{Hz}$	54	60	-	dB
Output Noise Voltage	$V_{NO}$	$V_{IN}=-11\text{V}$ , $I_O=0.5\text{A}$ , $BW=10\text{Hz}$ to $100\text{kHz}$ ,	-	110	-	$\mu\text{V}$

■ ELECTRICAL CHARACTERISTICS ( $T_j=25^\circ\text{C}$ ,  $C_{IN}=2.2\mu\text{F}$ ,  $C_O=1.0\mu\text{F}$ )  
Measurement is to be conducted in pulse testing.

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
<b>NJM7908FA</b>						
Output Voltage	$V_O$	$V_{IN}=-14\text{V}$ , $I_O=0.5\text{A}$	-7.7	-8.0	-8.3	$\text{V}$
Line Regulation	$\Delta V_O - V_{IN}$	$V_{IN}=-10.5 \text{ to } -25\text{V}$ , $I_O=1.5\text{A}$	-	8	80	$\text{mV}$
Load Regulation	$\Delta V_O - I_O$	$V_{IN}=-14\text{V}$ , $I_O=0.005 \text{ to } 0.5\text{A}$	-	60	110	$\text{mV}$
Quiescent Current	$I_Q$	$V_{IN}=-14\text{V}$ , $I_O=0\text{mA}$	-	2.2	5.0	$\text{mA}$
Average Temperature Coefficient of Output Voltage	$\Delta V_O/\Delta T$	$V_{IN}=-14\text{V}$ , $I_O=5\text{mA}$	-	-0.7	-	$\text{mV}/^\circ\text{C}$
Ripple Rejection	RR	$V_{IN}=-14\text{V}$ , $I_O=0.5\text{A}$ , $e_{in}=2V_{P-P}$ , $f=120\text{Hz}$	54	60	-	$\text{dB}$
Output Noise Voltage	$V_{NO}$	$V_{IN}=-14\text{V}$ , $I_O=0.5\text{A}$ , $BW=10\text{Hz}$ to $100\text{kHz}$ ,	-	130	-	$\mu\text{V}$
<b>NJM7909FA</b>						
Output Voltage	$V_O$	$V_{IN}=-15\text{V}$ , $I_O=0.5\text{A}$	-8.65	-9.0	-9.35	$\text{V}$
Line Regulation	$\Delta V_O - V_{IN}$	$V_{IN}=-11.5 \text{ to } -25\text{V}$ , $I_O=0.5\text{A}$	-	8	90	$\text{mV}$
Load Regulation	$\Delta V_O - I_O$	$V_{IN}=-15\text{V}$ , $I_O=0.005 \text{ to } 1.5\text{A}$	-	60	120	$\text{mV}$
Quiescent Current	$I_Q$	$V_{IN}=-15\text{V}$ , $I_O=0\text{mA}$	-	2.2	5.0	$\text{mA}$
Average Temperature Coefficient of Output Voltage	$\Delta V_O/\Delta T$	$V_{IN}=-15\text{V}$ , $I_O=5\text{mA}$	-	-0.8	-	$\text{mV}/^\circ\text{C}$
Ripple Rejection	RR	$V_{IN}=-15\text{V}$ , $I_O=0.5\text{A}$ , $e_{in}=2V_{P-P}$ , $f=120\text{Hz}$	54	59	-	$\text{dB}$
Output Noise Voltage	$V_{NO}$	$V_{IN}=-15\text{V}$ , $I_O=0.5\text{A}$ , $BW=10\text{Hz}$ to $100\text{kHz}$ ,	-	150	-	$\mu\text{V}$
<b>NJM7912FA</b>						
Output Voltage	$V_O$	$V_{IN}=-19\text{V}$ , $I_O=0.5\text{A}$	-11.5	-12.0	-12.5	$\text{V}$
Line Regulation	$\Delta V_O - V_{IN}$	$V_{IN}=-14.5 \text{ to } -30\text{V}$ , $I_O=0.5\text{A}$	-	3	120	$\text{mV}$
Load Regulation	$\Delta V_O - I_O$	$V_{IN}=-19\text{V}$ , $I_O=0.005 \text{ to } 1.5\text{A}$	-	60	150	$\text{mV}$
Quiescent Current	$I_Q$	$V_{IN}=-19\text{V}$ , $I_O=0\text{mA}$	-	2.7	6.0	$\text{mA}$
Average Temperature Coefficient of Output Voltage	$\Delta V_O/\Delta T$	$V_{IN}=-19\text{V}$ , $I_O=5\text{mA}$	-	-0.4	-	$\text{mV}/^\circ\text{C}$
Ripple Rejection	RR	$V_{IN}=-19\text{V}$ , $I_O=0.5\text{A}$ , $e_{in}=2V_{P-P}$ , $f=120\text{Hz}$	54	68	-	$\text{dB}$
Output Noise Voltage	$V_{NO}$	$V_{IN}=-19\text{V}$ , $I_O=0.5\text{A}$ , $BW=10\text{Hz}$ to $100\text{kHz}$ ,	-	150	-	$\mu\text{V}$
<b>NJM7915FA</b>						
Output Voltage	$V_O$	$V_{IN}=-23\text{V}$ , $I_O=0.5\text{A}$	-14.4	-15.0	-15.6	$\text{V}$
Line Regulation	$\Delta V_O - V_{IN}$	$V_{IN}=-17.5 \text{ to } -30\text{V}$ , $I_O=0.5\text{A}$	-	3	150	$\text{mV}$
Load Regulation	$\Delta V_O - I_O$	$V_{IN}=-23\text{V}$ , $I_O=0.005 \text{ to } 1.5\text{A}$	-	60	180	$\text{mV}$
Quiescent Current	$I_Q$	$V_{IN}=-23\text{V}$ , $I_O=0\text{mA}$	-	2.7	6.0	$\text{mA}$
Average Temperature Coefficient of Output Voltage	$\Delta V_O/\Delta T$	$V_{IN}=-23\text{V}$ , $I_O=5\text{mA}$	-	-0.5	-	$\text{mV}/^\circ\text{C}$
Ripple Rejection	RR	$V_{IN}=-23\text{V}$ , $I_O=0.5\text{A}$ , $e_{in}=2V_{P-P}$ , $f=120\text{Hz}$	54	67	-	$\text{dB}$
Output Noise Voltage	$V_{NO}$	$V_{IN}=-23\text{V}$ , $I_O=0.5\text{A}$ , $BW=10\text{Hz}$ to $100\text{kHz}$ ,	-	170	-	$\mu\text{V}$

# NJM7900

---


## ■ ELECTRICAL CHARACTERISTICS ( $T_j=25^\circ\text{C}$ , $C_{IN}=2.2\mu\text{F}$ , $C_O=1.0\mu\text{F}$ )

Measurement is to be conducted in pulse testing.

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
<b>NJM7918FA</b>						
Output Voltage	$V_O$	$V_{IN}=-27\text{V}$ , $I_O=0.5\text{A}$	-17.3	-18.0	-18.7	$\text{V}$
Line Regulation	$\Delta V_O - V_{IN}$	$V_{IN}=-21$ to $-33\text{V}$ , $I_O=0.5\text{A}$	-	4	180	$\text{mV}$
Load Regulation	$\Delta V_O - I_O$	$V_{IN}=-27\text{V}$ , $I_O=0.005$ to $1.5\text{A}$	-	60	210	$\text{mV}$
Quiescent Current	$I_Q$	$V_{IN}=-27\text{V}$ , $I_O=0\text{mA}$	-	2.7	6.0	$\text{mA}$
Average Temperature Coefficient of Output Voltage	$\Delta V_O/\Delta T$	$V_{IN}=-27\text{V}$ , $I_O=5\text{mA}$	-	-0.6	-	$\text{mV}/^\circ\text{C}$
Ripple Rejection	RR	$V_{IN}=-27\text{V}$ , $I_O=0.5\text{A}$ , $e_{in}=2\text{V}_{\text{P-P}}$ , $f=120\text{Hz}$	54	66	-	$\text{dB}$
Output Noise Voltage	$V_{NO}$	$V_{IN}=-27\text{V}$ , $I_O=0.5\text{A}$ , $BW=10\text{Hz}$ to $100\text{kHz}$ ,	-	200	-	$\mu\text{V}$
<b>NJM7924FA</b>						
Output Voltage	$V_O$	$V_{IN}=-33\text{V}$ , $I_O=0.5\text{A}$	-23.0	-24.0	-25.0	$\text{V}$
Line Regulation	$\Delta V_O - V_{IN}$	$V_{IN}=-27$ to $-38\text{V}$ , $I_O=0.5\text{A}$	-	5	240	$\text{mV}$
Load Regulation	$\Delta V_O - I_O$	$V_{IN}=-33\text{V}$ , $I_O=0.005$ to $1.5\text{A}$	-	60	270	$\text{mV}$
Quiescent Current	$I_Q$	$V_{IN}=-33\text{V}$ , $I_O=0\text{mA}$	-	2.7	6.0	$\text{mA}$
Average Temperature Coefficient of Output Voltage	$\Delta V_O/\Delta T$	$V_{IN}=-33\text{V}$ , $I_O=5\text{mA}$	-	-0.8	-	$\text{mV}/^\circ\text{C}$
Ripple Rejection	RR	$V_{IN}=-33\text{V}$ , $I_O=0.5\text{A}$ , $e_{in}=2\text{V}_{\text{P-P}}$ , $f=120\text{Hz}$	54	64	-	$\text{dB}$
Output Noise Voltage	$V_{NO}$	$V_{IN}=-33\text{V}$ , $I_O=0.5\text{A}$ , $BW=10\text{Hz}$ to $100\text{kHz}$ ,	-	300	-	$\mu\text{V}$


## ■ TEST CIRCUIT

1. Output Voltage, Line Regulation, Load Regulation, Quiescent Current, Average Temperature Coefficient of Output Voltage, Output Noise Voltage

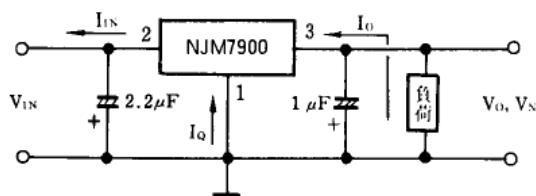


$$I_Q = I_{IN} - I_O$$

2. Ripple Rejection

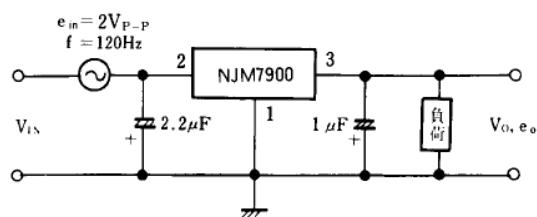

$$RR = 20 \log_{10} \left( \frac{e_{in}}{e_o} \right) [\text{dB}]$$


## ■ POWER DISSIPATION VS. AMBIENT TEMPERATURE

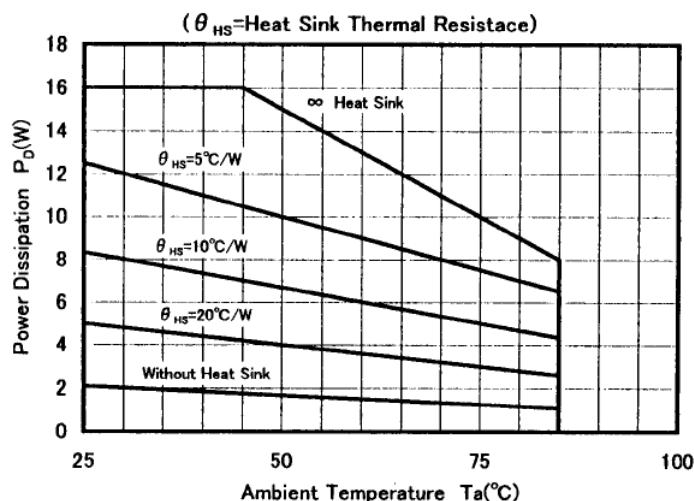


# NJM7900

## ■ TYPICAL CHARACTERISTICS


**NJM7900 Output Characteristics**

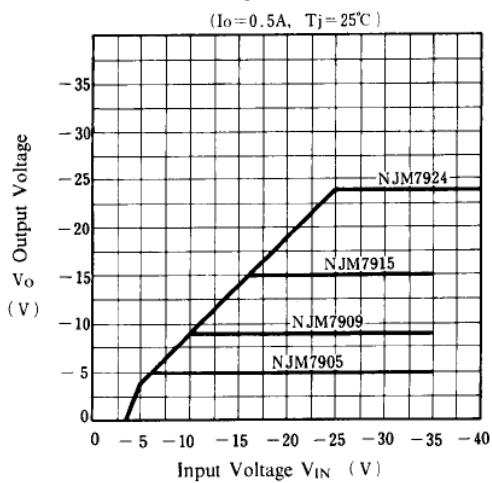


**NJM7912 Output Voltage vs. Low Input Voltage**

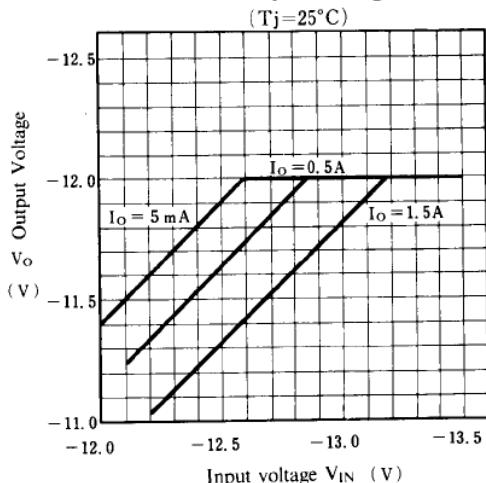


**NJM7905/15/24 Load Characteristics**

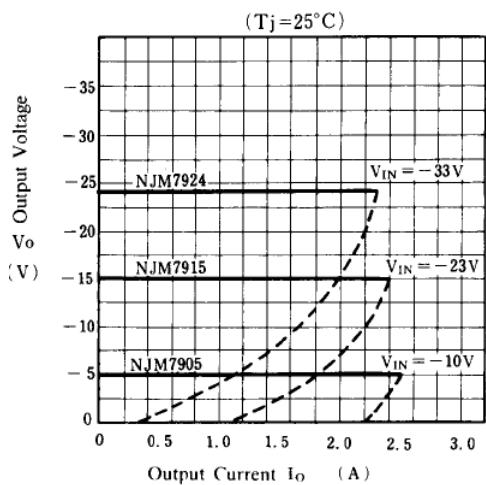


**NJM7900 Series Short Circuit Output Current**

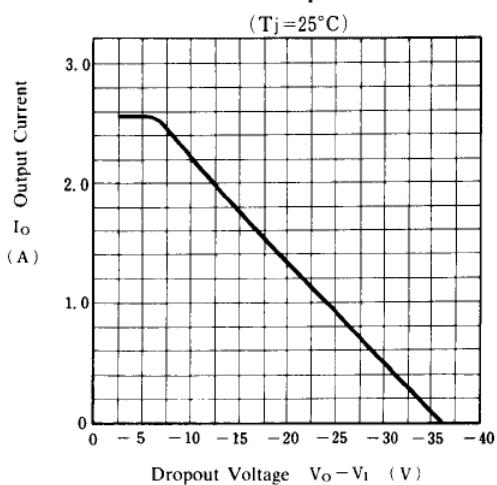

**NJM7905/12/24 Output Voltage vs. Junction Temperature**

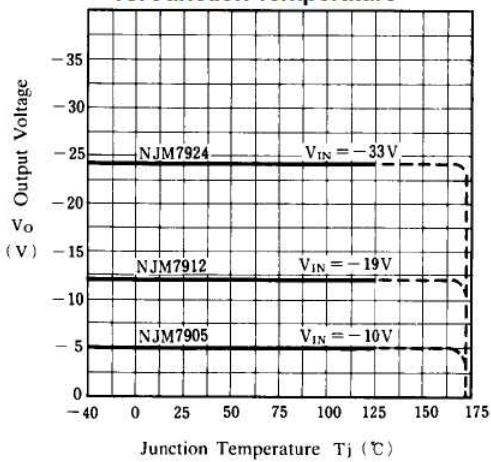


**NJM7905/12/24 Ripple Rejection vs. Frequency**

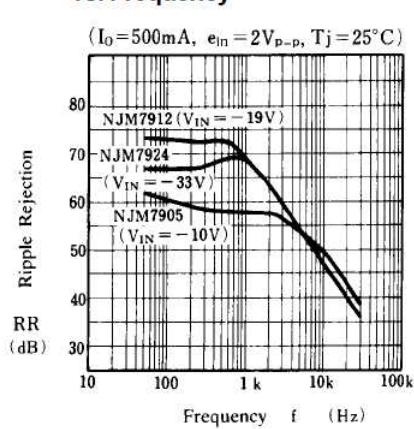


## ■ TYPICAL CHARACTERISTICS

**NJM7905 Dropout Characteristics**

( $T_j = 25^\circ\text{C}$ )

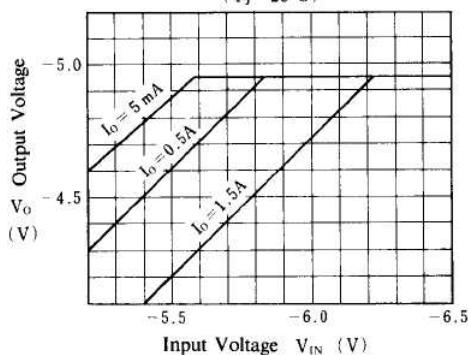


**NJM7905 Output Voltage vs. Temperature**

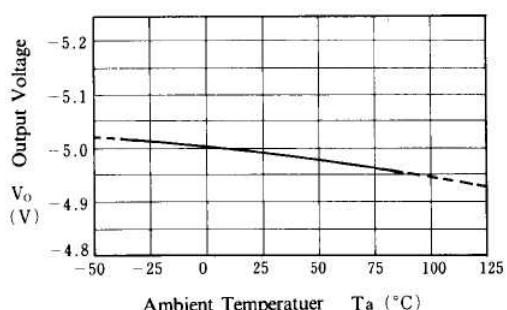

**Quiescent Current vs. Input Voltage**

( $I_o = 0 \text{ mA}$ ,  $T_j = 25^\circ\text{C}$ )

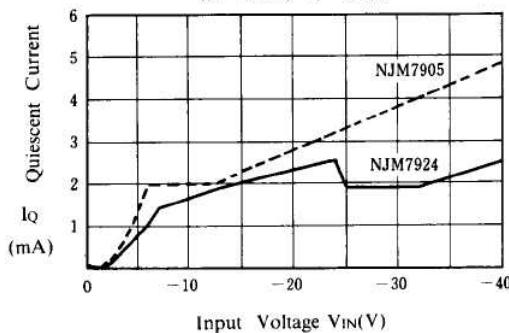


**NJM7900 Equivalent Series Resistor Vs. Output Current**

$V_{in}$ =Output voltage of the conditions described in the

ELECTRICAL CHARACTERISTICS

$T_a=25^\circ\text{C}, C_{in}=2.2\mu\text{F}, C_o=1.0\mu\text{F}$ (Ceramic capacitor)

Recommended Capacitor is Electrolytic Capacitor

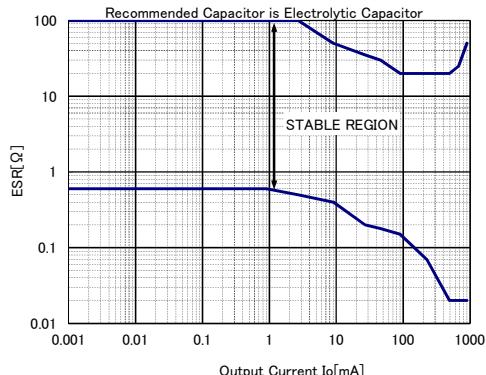

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.