


KAM15CT70J226KT Datasheet



(0603 6.3 V X7T 22uF ±10%)

Dimensions









	millimetres	inches
L	1.6 ± 0.2	0.063 ± 0.008
W	0.8 ± 0.2	0.031 ± 0.008
T max.	1	0.039
t	0.4 ± 0.2	0.016 ± 0.008

Basic Specifications

Item	Unit	Spec.	Conditions
Capacitance	uF	19.8 to 24.2	@ 120 Hz, 0.5 Vrms
DF	%	12.5 max.	@ 120 Hz, 0.5 Vrms
IR	MΩ	2.2 min.	@ 6.3 Vdc, t = 60 s

Operating Temperature	-55°C to +125°C
Dielectric	X7T
Product Level	AEC-Q200
RoHS Compliant	Yes
Termination	Sn

Electrical Characteristics

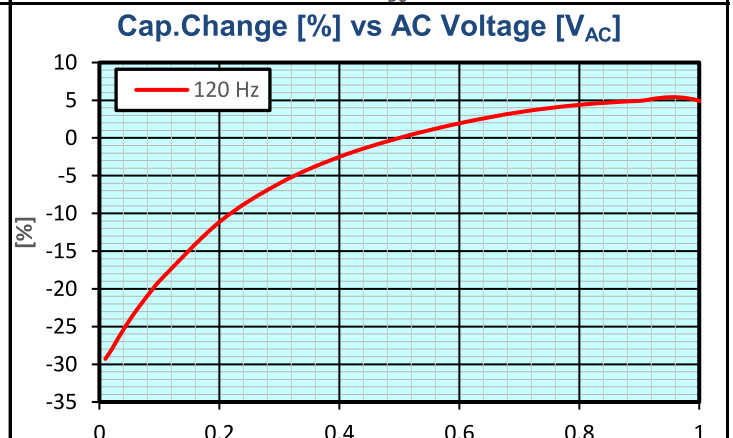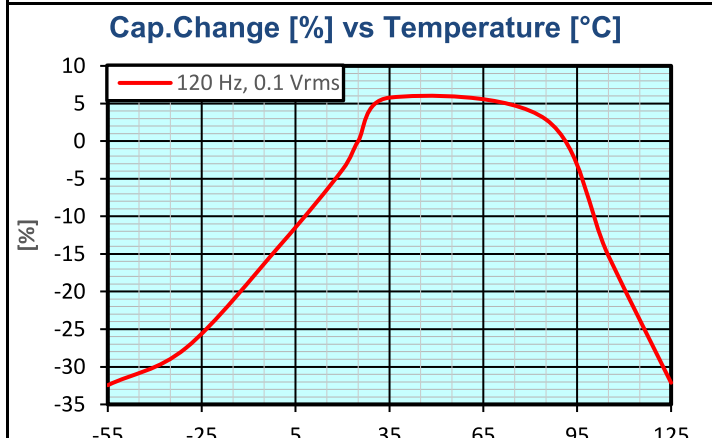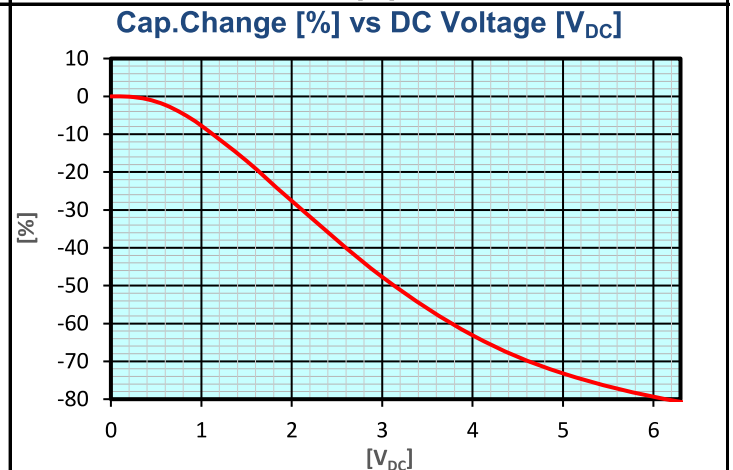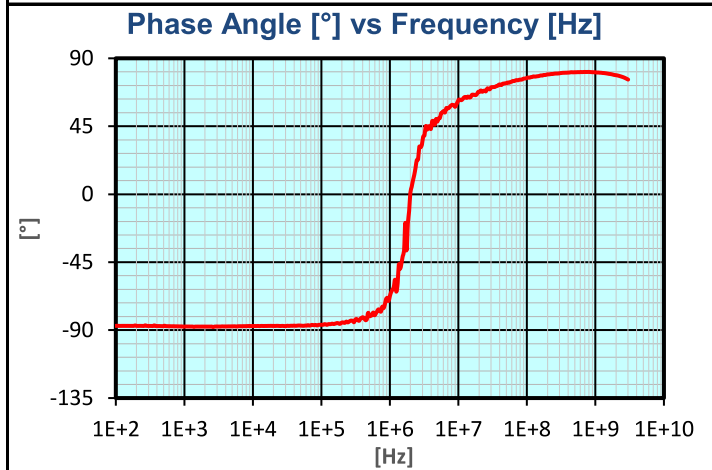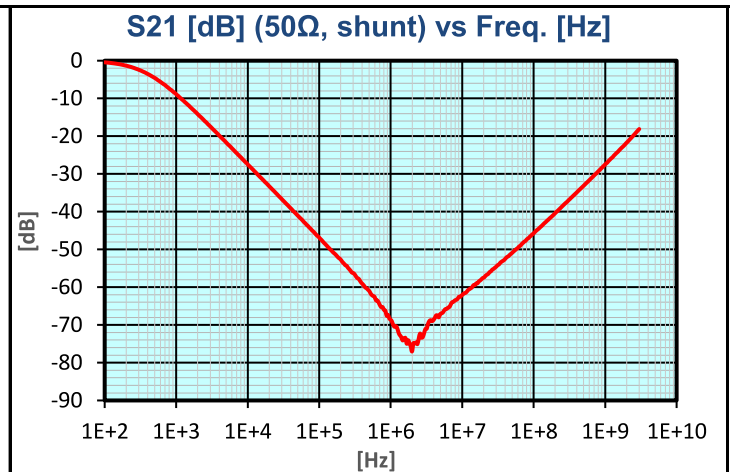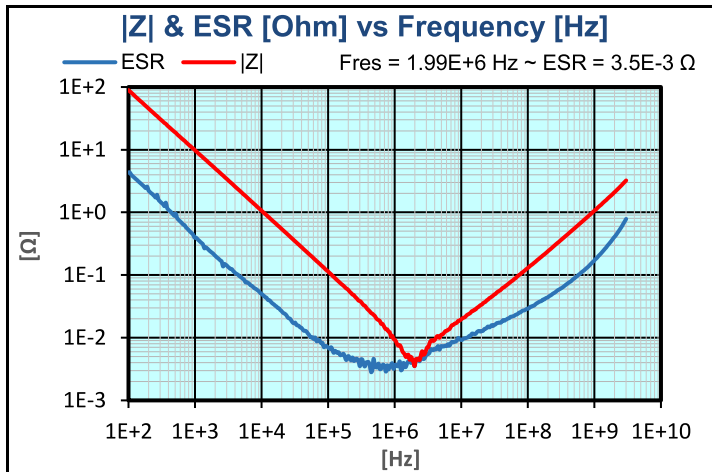


KAM15CT70J226KT Datasheet



(0603 6.3 V X7T 22 μ F \pm 10%)

Electrical Characteristics

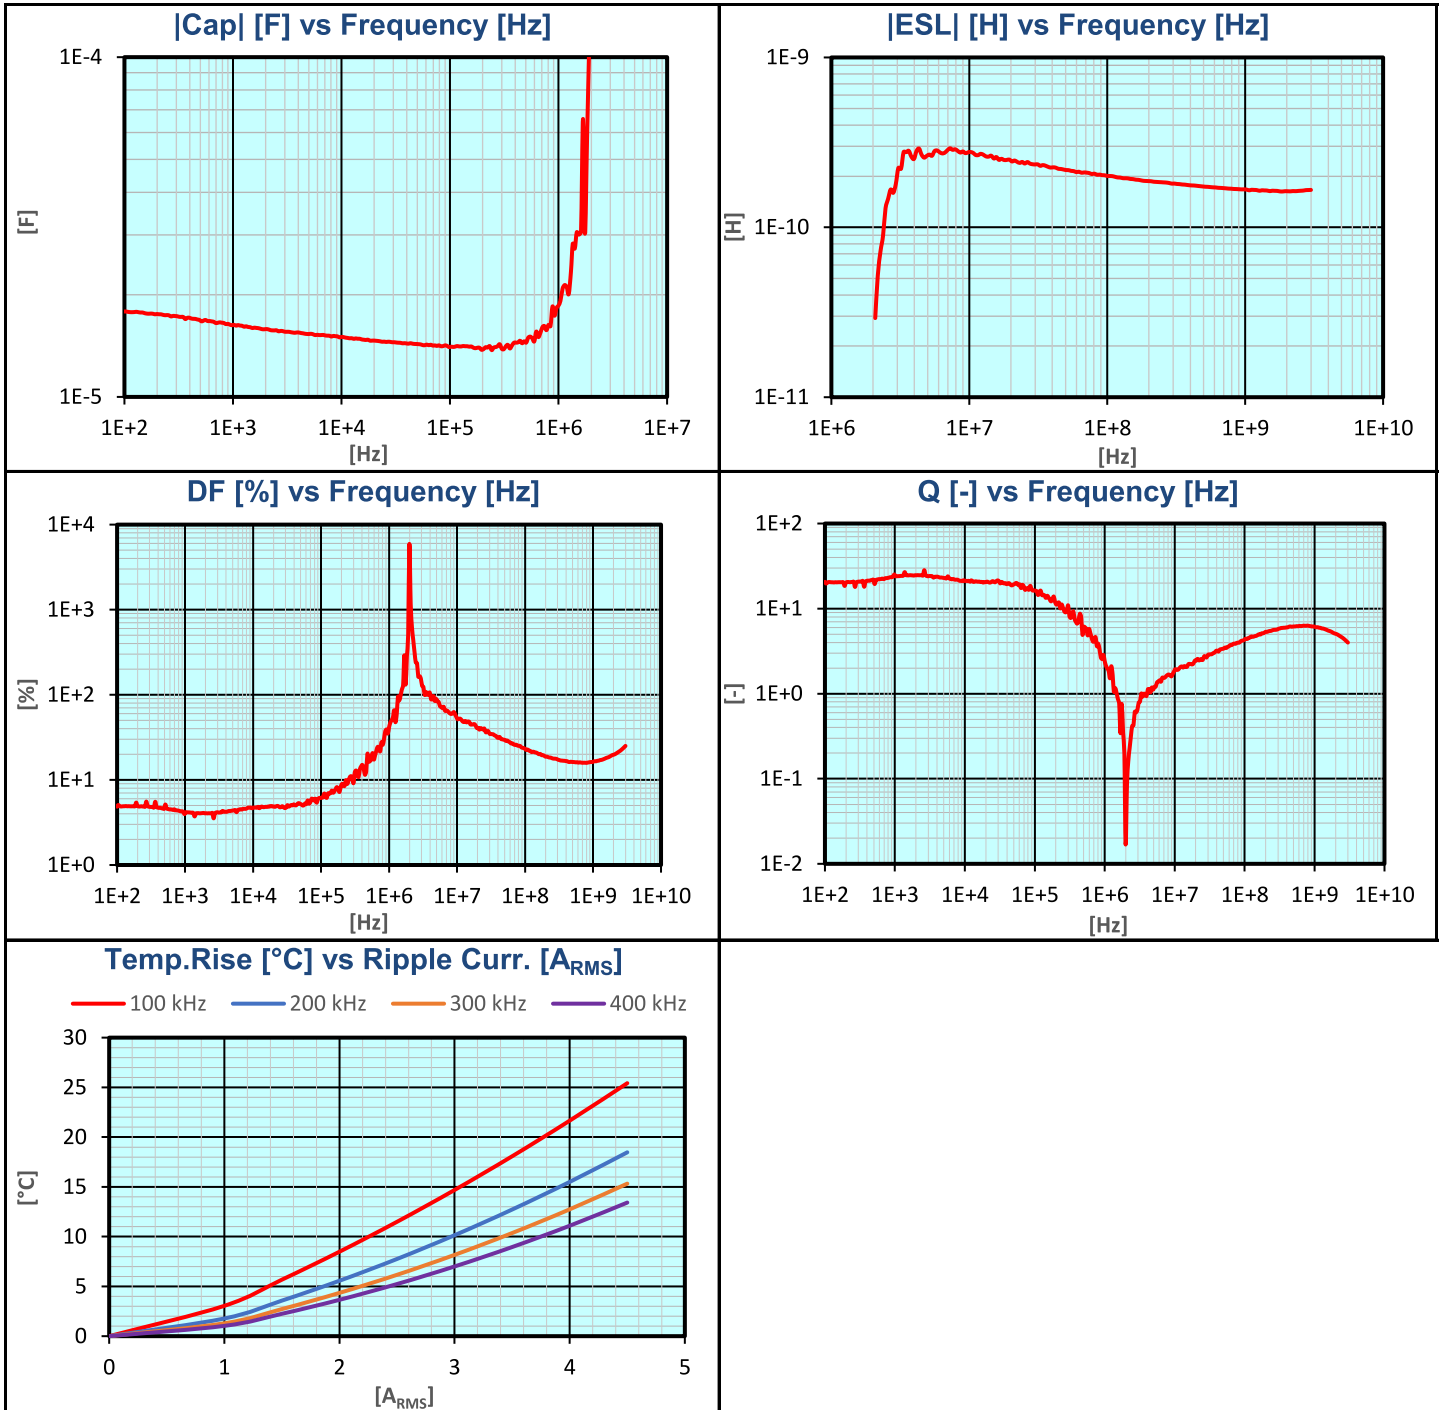

KAM15CT70J226KT Datasheet



(0603 6.3 V X7T 22uF ±10%)

Part Number Information

K			G			M			21		C		R5		1E		103		K		T		###	
Symbol:	Product Level:		Requirement:			Size:	EIA:	Thickness:	Dielectric:		Voltage:		Capacitance:		Tolerance:		Packing:		Optional:					
KAVX	G	General	M	Standard		02	01005	See catalog	CG	C0G	0	1x	A	1	(2 significant digits + no of zeros)	A	± 0.05 pF	H	} Φ 180 (7 inch)*	See catalog for optional codes				
	A	Automotive	U	Hi-Q (Special function)		03	0201	for list of codes	R5	X5R	1	10x	N	1.5		B	± 0.1 pF	T						
		(AEC-Q200)	E	ESD (Special function)		05	0402		S6	X6S	2	100x	D	2	Examples:	C	± 0.25 pF	U						
	M	Medical	L	Low inductance reverse Geometry		15	0603		T6	X6T	3	1000x	E	2.5	100 = 10 pF	D	± 0.5 pF	Y						
			A	Low Inductance LGA		21	0805		R7	X7R	U	3			102 = 1000 pF	F	± 1 %	V						
			F	Flexiterm (Special function/structure)		31	1206		S7	X7S	V	3.5			224 = 220 nF	G	± 2 %	M	} Φ 330 (13 inch)*					
			S	Flexisafe (Special function/structure)		42	1808		T7	X7T	G	4			105 = 1 μF	J	± 5 %	L						
			G	Gold Termination (Special Structure)		43	1812		R8	X8R	H	5				K	± 10 %	N						
			C	IDC (Special structure)		44	1825		L8	X8L	J	6.3				M	± 20 %	K						
			Q	Ultra Low ESR		55	2220		G8	X8G								S						
						56	2225		V5	Y5V								X	Waffle pack					
						91	3640																	

Note:
* See catalog for more information.