

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.



© COPYRIGHT - By -

REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|----|-----|---------------------------|-----------|-----|------|
| G1 | | REVISED PER ECO-14-003208 | 14MAR2014 | NK | DR |
| G2 | | REVISED PER ECO-17-008114 | 05JUN2018 | RS | DR |

| | |
|---|--------------------------|
| AMP WIRE RANGE | RA FILE E13288 |
| 1.0-2.6mm ² (16-14 AWG) STRANDED | 16-14 AWG STRANDED |

- 1 WIRE INSULATION DIA "A" MAX, SEE TABLE
- △ 2 STAMP AMP 16-14* APPROX AS SHOWN
- 3 MAX OPERATING TEMPERATURE 105°C [221°F]

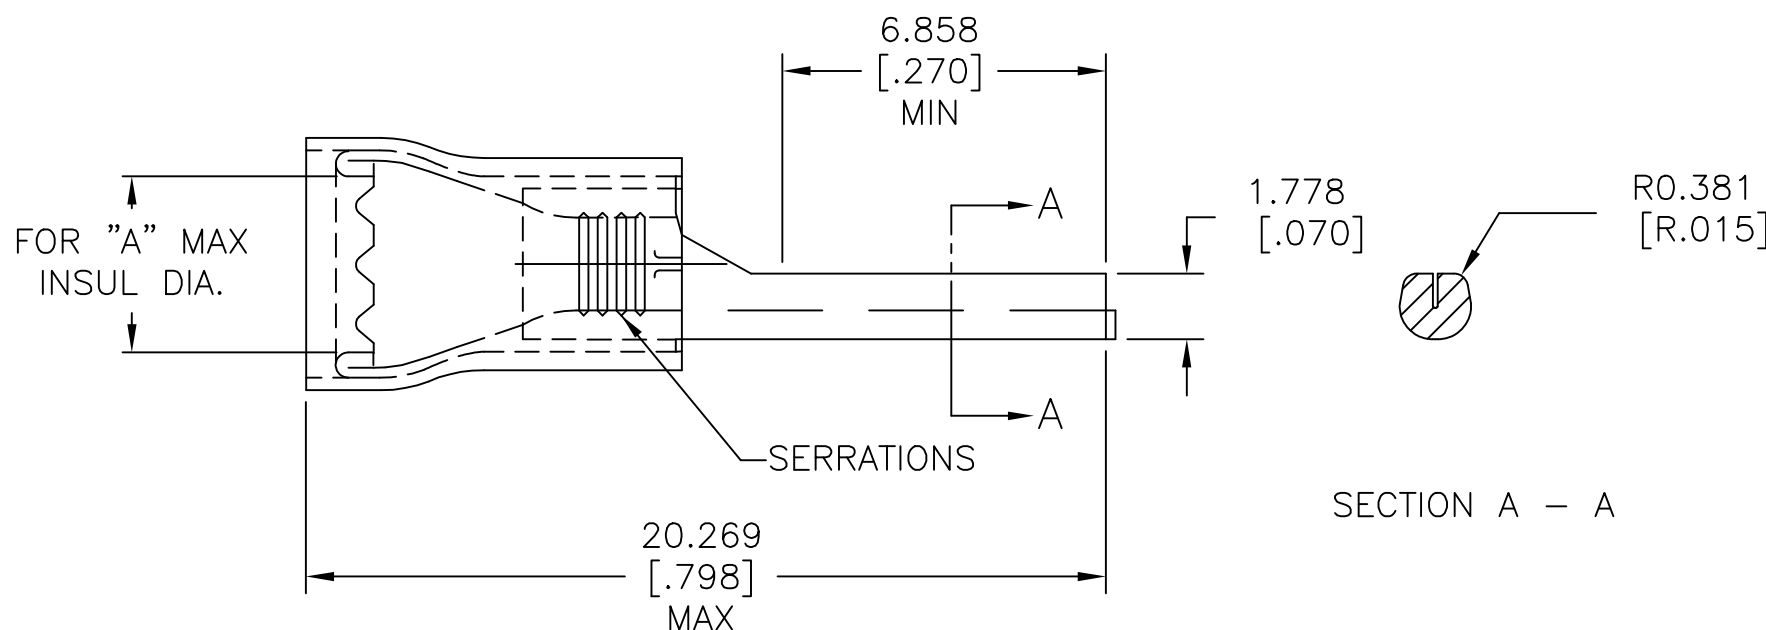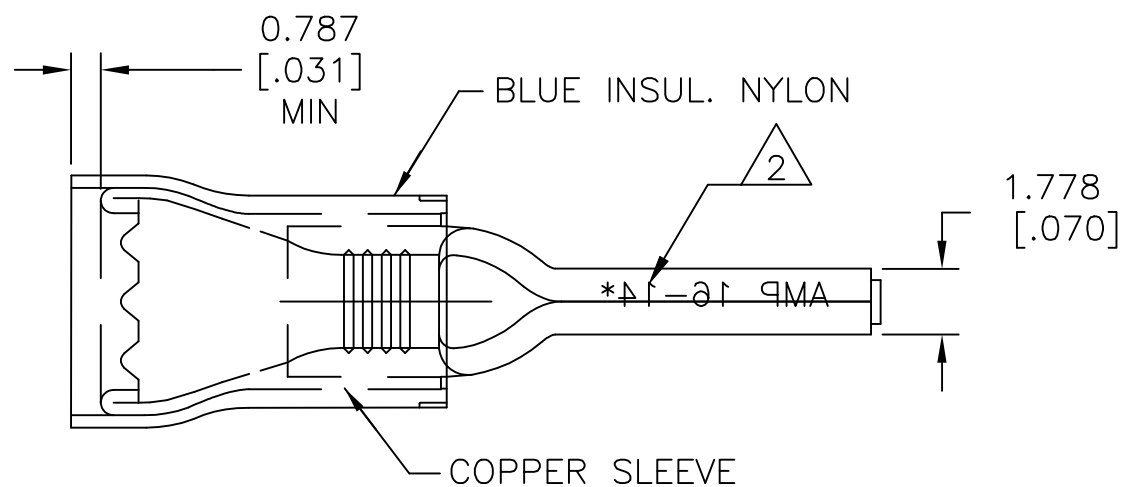

| | | | | |
|-------------|--------------|------------|----------|---------|
| 1000 | 4.394 [.173] | TIN PLATED | COPPER | 165046 |
| PACKAGE QTY | DIM "A" | FINISH | MATERIAL | PART NO |

| | | | | |
|--|--|----------------------------------|------------------------------------|----------------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN JR RUTH 01JUN07 | TE TE Connectivity Ltd. | |
| DIMENSIONS: mm [INCHES] | | CHK T MICHIELUTTI 01JUN07 | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD T MICHIELUTTI 01JUN07 | NAME PIDG WIRE PIN 16-14 AWG | |
| 0 PLC ± - | | PRODUCT SPEC UL 486 A-B | SIZE A3 | |
| 1 PLC ± - | | APPLICATION SPEC 114-2157 | CAGE CODE 00779 | DRAWING NO 165046 |
| 2 PLC ± - | | WEIGHT - | RESTRICTED TO - | |
| 3 PLC ± 0.127 [.005] | | CUSTOMER DRAWING | SCALE 5:1 | SHEET 1 of 1 |
| 4 PLC ± - | | | REV G2 | |
| ANGLES ± - | | | | |
| FINISH SEE TABLE | | | | |