

1

2

3

4

5

6

7

A

NOTES:

MATERIAL

1. Insulator Material: PBT +30%GF(UL94V-0), Black
2. Contact Material : Phosphor Bronze
3. Contact Plating : Gold flash/ Tin Over Ni ELECTRICAL

ENVIRONMENTAL

1. Current Rating : 1AMP
2. Withstand Voltage : 500V AC/DC
3. Contact Resistance : 20mΩ max
4. Insulation Resistance: 1000MΩ min

1. Operation Temperature: -40°C to +105°C

2. Packing: Tray

No. of contacts: 06, 08, 10, 12, 14, 16, 18, 20, 22, 24, 26


30, 34, 36, 40, 44, 50, 60, 64, 68

 $2.0 \times \text{No. of Positions} + 5.2 \pm 0.30$
 $2.0 \times \text{No. of Positions} + 0.54 \pm 0.20$
 $2.0 \times \text{No. of Contacts} / 2 - 2.0 \pm 0.20$
 2.00 ± 0.10 (Pitch)


A1

A

 2.00 ± 0.10
 3.50 ± 0.15 (6/8P:2,0)

 4.70 ± 0.20
 4.20 ± 0.20
 1.90 ± 0.20
 5.40 ± 0.15



SECTION B-B

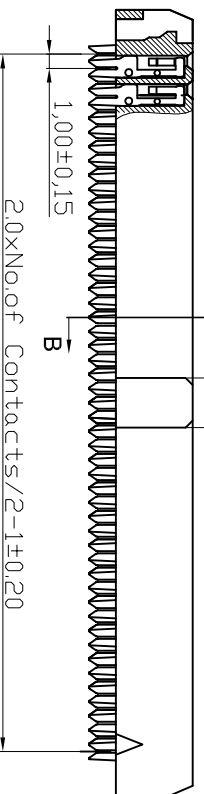

SECTION A-A



COVER



A

B

C

D

E

F

G

H

RoHS compliant



File No.: E198287

⑥

1

2

3

4

5

6

7

SV1751

Scale	1:1	⑥ Add the UL-File No	13.12.2013	Winnie	Date	Name
TOLERANCE		⑤ Delete page 2	22.11.2013	Ray	25.01.2006	Alex
X.X	±0.40	④ Added 68 Pin	24.12.2009	Dean	13.12.2013	Winnie
X.XX	±0.25	③ Correct P/N	28.10.2009	Dean		
X.XXX	±0.15	② Update	29.06.2009	Dean		
Angle	±3°	① Drawn	25.01.2006	Alex		
		Id.				
		Modification				

Customer-No.

ASSMANN WSW-No.

AWP2 XX-7240 ②

Drawing-No.

ASS 2309 CO

rev06

Replace

Sheet
1 / 1