


COIL: @ 25°C	
RESISTANCE	2000 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	14.2 VDC
MUST RELEASE	8.0 VDC MAX. 1.37 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 CPS TO 3000 CPS @ 30 g's
SHOCK	75 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX.
 RELEASE TIME 4.0 MS MAX.
 CONTACT STABILIZATION 2.0 MS MAX.

CUSTOMER DATA SHEET

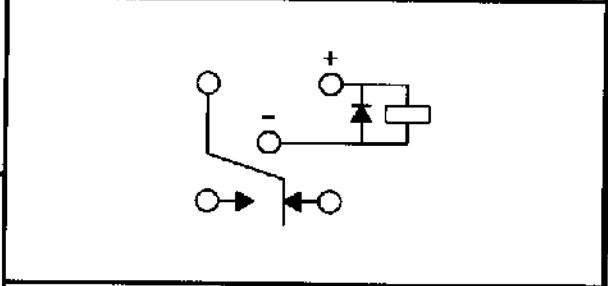

CONTACT RATING: LOW LEVEL TO 1A
 28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 12/5/96 CK Jerry 12/5/96



CUST. OPL
 CUST. NO. M39016/23-024M

TYPE J1MAD RELAY

J1MAPD-26XM