


NOTES:

1. MATERIALS:
 HOOD: PBT GF UL94 V-0 BLACK
 FRONTSEALING: SILICONE VMQ BLUE
 SCREW: STAINLESS STEEL
 O-RING: NBR BLACK
2. TEMPERATURE RANGE: -30°C TO +90°C
3. RECOMMENDED TORQUE FOR SCREW:
 35Ncm (3.1 in.LB)
 MAX. TORQUE: 68Ncm (6 in.LB)
4. SINGLE PACKED

* COMPLETELY TIGHTENED

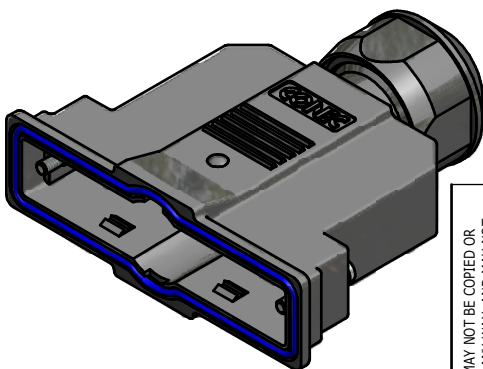

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND	tolerance		±0,3 unless otherw. specified		dim. in mm	scale:		1,5:1 (1:1)		
	date		name			material:		SEE NOTES		
	drawn		07.02.2014		Heinrich		title:		WATER RESISTANT D-SUB HOOD	
	appd.		07.02.2014		Huether		37 POS.		SHORT SCREW 4-40UNC STAINLESS STEEL	
	norm						dwg no:		15K1A1438	
	d-old						part no:		15-004740	
	a		Origin				DIN-A3		sh: 1	
	rev.		description		date		name			

