Standard Faders for Audio Mixers Slide Potentiometers Japan Malaysia

Type: EWAP1/EWAP3/EWAQ1/EWAQ3



- Features
- Excellent operational feel:
 Clear clicking action for heat controllers.
 Smooth sliding action for Electronic Musical Instruments.
- Low noise, long operating life, highly-accurate attenuation.
- Light operating force available.

- Recommended Applications
- Fade control for popular types of audio mixers, musical keyboards
- Heat control or mode switching for automobile air conditioners
- Measurement Instruments

■ Explanation of Part Numbers

1	2	3	4	5	6	7	8	9	10	11	12
E	W	A									
Product Code			Specifications			Lever Tri	ims & Din	nensions	Taper & Resistance		


Specifications


Specifications								
		Taper	Taper B			Others		
Power Rating	60.0 m	m Type		0.12 W		0.06 W		
	45.0 m	m Type		0.10 W		0.05 W		
Resistance	10 10 20	kΩ, 50 kΩ		Single±20 %		+40 % -20 %		
nesistance	10 K12, 20	K12, 50 K12		Dual±20 %		_		
Taper	A, B, D, Y (Custom tapers also available)							
Maximum Attenuation	Single type: 100 dB min.(Except taper B) Dual type: 70 dB min.(Except taper B)							
Insulation Resistance	100 MΩ min. at 200 Vdc							
Dielectric Withstand Voltage	300 Vac for 1 minute							
Operating Force	0.1 N to 1.5 N							
Operating Life	30000 cycles min.							
	EWAP1	E.) non (Tro	(Troy, Dools)				
Minimum Overstitu/Dealine Unit	EWAP3	50 pcs.		s. (Tray Pack)				
Minimum Quantity/Packing Unit	EWAQ1	50	0 pcs.	(Tray Pack)	L	Lever length < 20.0 mm		
	EWAQ3	2	5 pcs.	(Tray Pack)	L	Lever length > 21.0 mm		
	EWAP1	50	pcs.					
Quantity/Cartan	EWAP3	500						
Quantity/Carton	EWAQ1 500) pcs.		L	_ever length < 20.0 mm		
	EWAQ3	250 pcs.			Lever length > 21.0 mm			

■ Dimensions in mm (not to scale)

● 60.0 mm Travel, Single EWAQ1

Dual EWAQ3

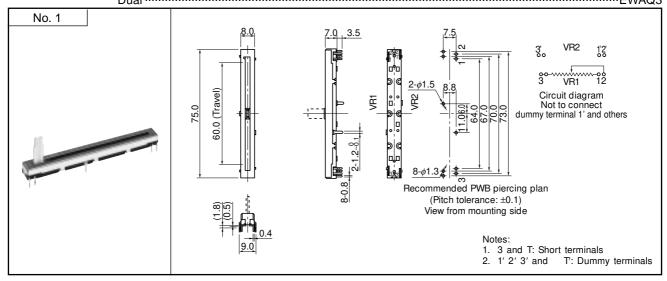

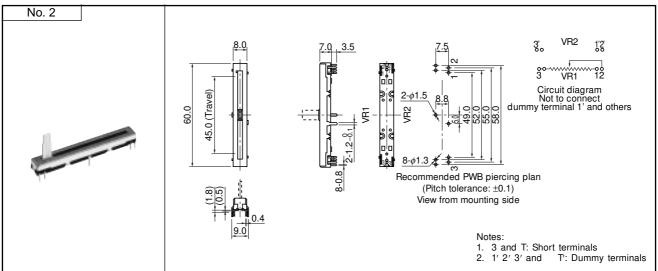

Notes: Refer to the drawing below for terminal alignment of dual slide potentiometers and single, dc version.

Terminal Numbers of Single, DC Version

