

REFERENCE SPECIFICATIONS

-NFC 93425 (in compliance with HE 507)

PHYSICAL CHARACTERISTICS

- INSULATOR MATERIAL: THERMOPLASTIC ,UL94V0
- CONTACT MATERIAL: BRASS
- ACCESSORIES: BRASS
- SHELLS: STEEL

ELECTRICAL CHARACTERISTICS

- NOMINAL CURRENT: 30A
- CONTACT RESISTANCE: <= 7.3 m ohms
- CONTACT/CONTACT : >=1000 V
- CONTACT/GROUND : >=1200 V
- INSULATION RESISTANCE: >=5000 MOhms

ENVIRONMENTAL CHARACTERISTICS

- CLIMATIC CATEGORY: 55/125/21
- TEMPERATURE RANGE -55°C TO +125°C
- DAMP HEAT STEADY STATE 21 DAYS
- SALT SPRAY 24 HOURS

MECHANICAL CHARACTERISTICS

- RETENTION AGAINST TORQUE: - Threaded insert: 0.7 N.m maximum
- Female screw : 0.5 N.m maximum

NOTE RoHS INFORMATION

- The "LF" products meet european union Directives and other country regulations as described in GS-47-0004.
- The housing will withstand exposure to 260°C peak temperature for 3.5 seconds in a wave solder application with a 1.6mm minimum thick circuit board. See application notes/procedures if they are available.
- Termination plating spec:
 - Ni 1.27µmi+Sn 2.5 to 7.5µ(pure bright
 - Active area plating spec:
 - Ni + Gold/GxT
 - Shell plating :2 to 4µm Cu + Ni + 3 to 10µmm Sn(pure bright)
 - Accessories: Sn pure bright + Nickel
- Packaging spec: See GS-14-920

DBL5W5S700G30LF

Series

Shell size: **E A B C**
see sheet 3

Front accessory definition
see sheet 2

- blank** :without accessory
- L** :threaded insert M3
- O** :threaded insert UNC 4-40
- V** :female screw UNC 4-40

Layout of contacts (see sheets)

Contacts

S :Socket

Termination type

7 Right angle/USA

Plating

- 00** 200 matings/unmatings
- 43** 500 matings/unmatings

PCB accessories definition
see sheet 2

- A** :without accessory
- H** :Metal brackets+harpoons for PCB 2.40mm
- G** :Metal brackets+harpoons for PCB 1.60mm
- M** :Metal brackets


Power contacts

- 00** :Not fitted with power contact (signal contacts always fitted)
- 30** :Fitted with power contacts 30 Amp.

See note RoHS


TABLE 1:PCB HOLE DIAMETERS

	POWER CONTACTS		ACCESSORIES
30 A	Ø2.00	Ø2.40	Ø3.10
Max current power	ØA ±0.1	PCB HOLE +/-0.1	PCB HOLE +/-0.1

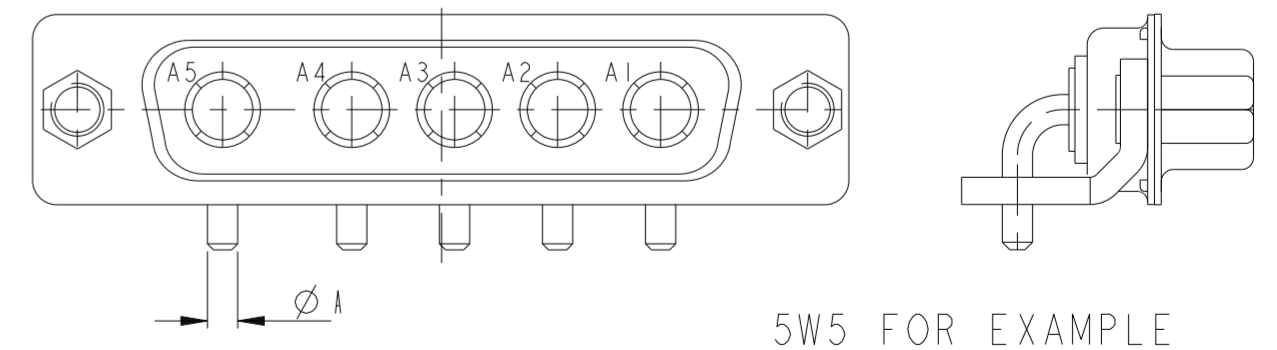


spec ref	dr	1, Product Eng	2015/06/16	projection	mm	size	A2	scale	1:1
tolerance std	eng	Gregar Mathew	2020/12/04		mm	ecn no	ELX-33121-1	rel level	Released
ISO 406 ISO 1101	chr	-	appr						
surface	linear	0.X	±0.3			SUB FEMALE DW US foot print		rev	
IS 1302	angular	0°	±2°	full power rihgt angled solder		c01-8639-2309C		rev	F
				cat. no.		Product - Customer Drw		sheet 1 of 5	

Amphenol FCI

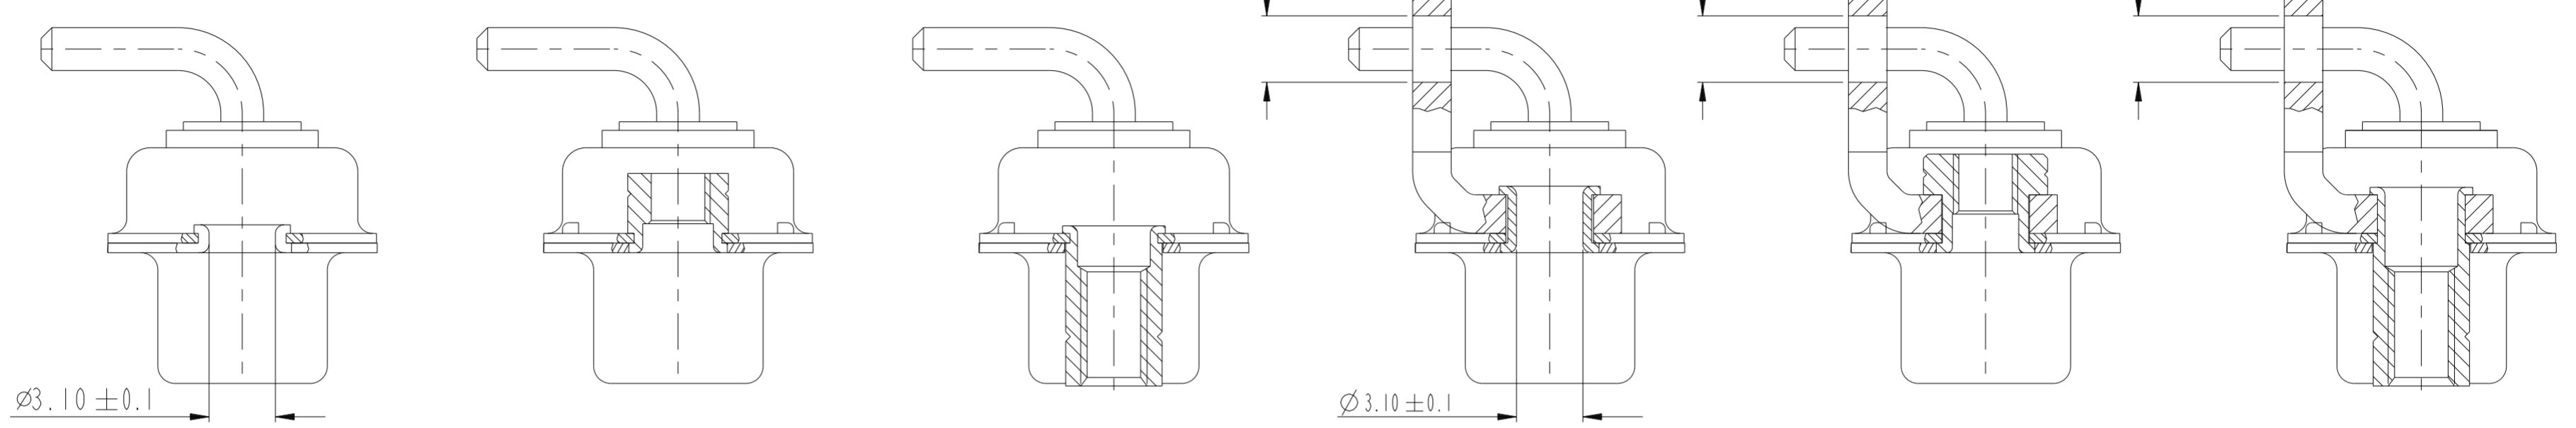

FRONT ACCESSORY	Blank Without	L insert M3 O insert UNC 4.40	V insert UNC 4.40	Blank Without	L insert M3 O insert UNC 4.40	V insert UNC 4.40
PCB ACCESSORIES	A Without	A Without	A Without	M Metal brackets	M Metal brackets	M Metal bracket

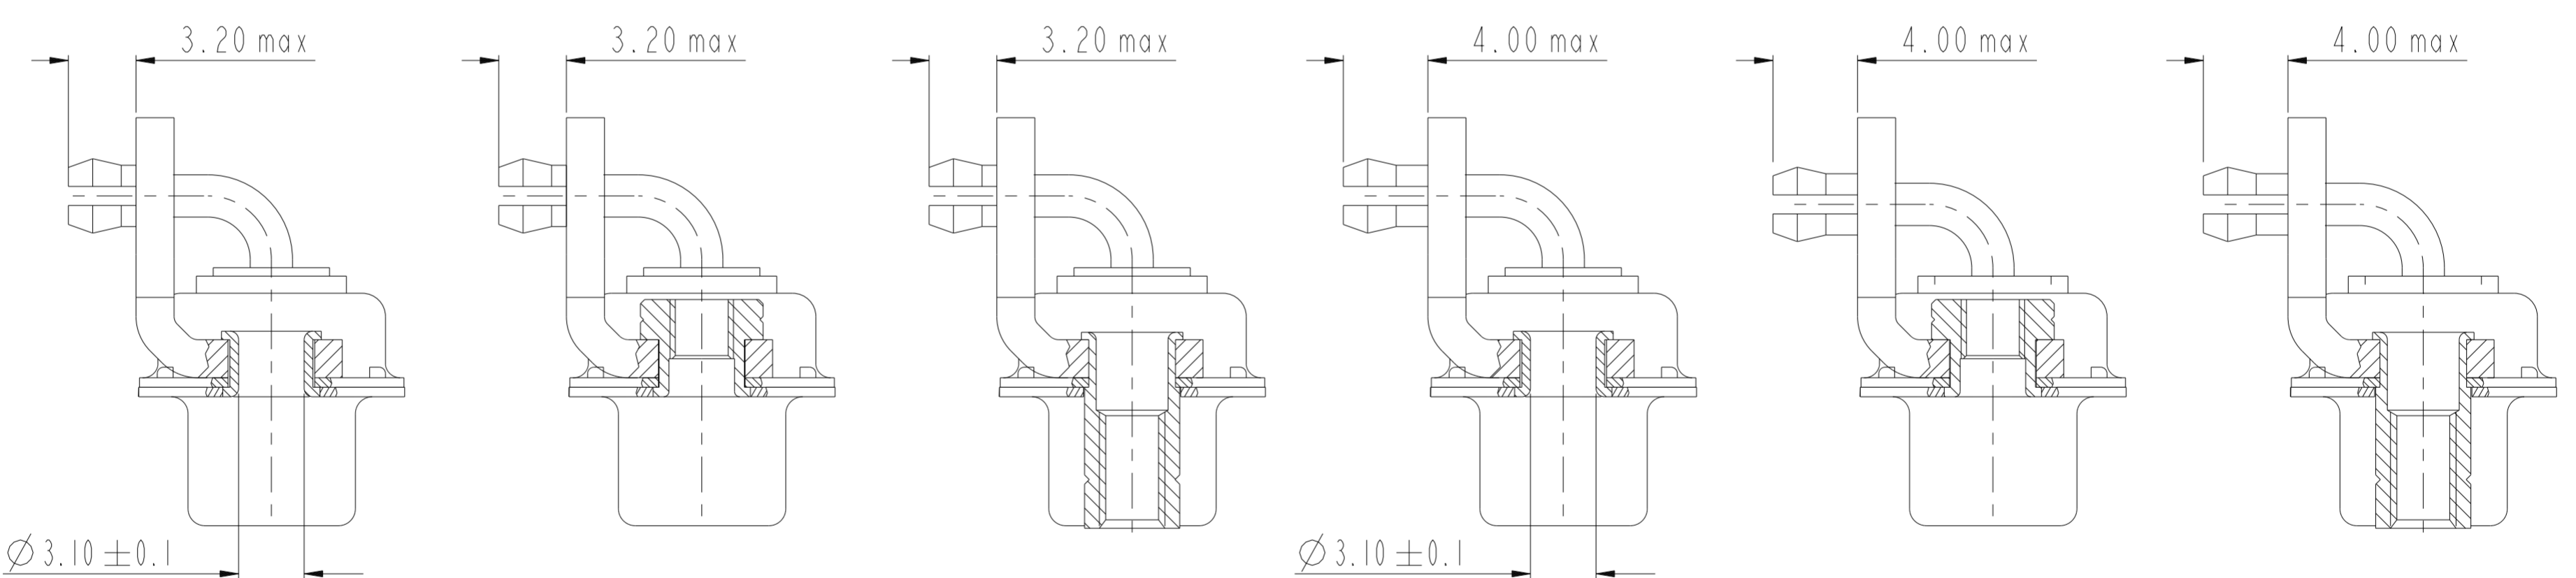

FRONT ACCESSORY	Blank Without	L insert M3 O insert UNC 4.40	V insert UNC 4.40	Blank Without	L insert M3 O insert UNC 4.40	V insert UNC 4.40
PCB ACCESSORIES	G Metal brackets + harpoons for PCB 1.60mm	G Metal brackets + harpoons for PCB 1.60mm	G Metal brackets + harpoons for PCB 1.60mm	H Metal brackets + harpoons for PCB 2.40mm	H Metal brackets + harpoons for PCB 2.40mm	H Metal brackets + harpoons for PCB 2.40mm

spec ref	dr	1, Product Eng	2015/06/16	projection	mm	size	A2	scale	2:1	
tolerance std	eng	Gregar Mathew	2020/12/04		mm	ecn no	ELX-33121-1	rel level	Released	
ISO 406 ISO 1101	chr	-	appr							Kuriakose, San
TOLERANCES UNLESS OTHERWISE SPECIFIED	Amphenol FCI			product family	-	title	SUB FEMALE DW US foot print			
surface	linear	0.X	±0.3	full power rihgt angled solder	cat. no.	-	Product - Customer Drw	sheet 2 of 5	rev	F
IS 1302	angular	0°	±2°							

© 2016 AFCI

A
B
C
D
E
F

PART NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES
D*xWxS700A30LF	30	200	without	without
D*LxWxS700A30LF	30	200	insert M3	without
D*OxWxS700A30LF	30	200	insert UNC 4.40	without
D*VxWxS700A30LF	30	200	female screw UNC 4.40	without
D*xWxS700H30LF	30	200	without	metal bracket+harpoon PCB 2.40mm
D*LxWxS700H30LF	30	200	insert M3	metal bracket+harpoon PCB 2.40mm
D*OxWxS700H30LF	30	200	insert UNC 4.40	metal bracket+harpoon PCB 2.40mm
D*VxWxS700H30LF	30	200	female screw UNC 4.40	metal bracket+harpoon PCB 2.40mm
D*xWxS700G30LF	30	200	without	metal bracket+harpoon PCB 1.60mm
D*LxWxS700G30LF	30	200	insert M3	metal bracket+harpoon PCB 1.60mm
D*OxWxS700G30LF	30	200	insert UNC 4.40	metal bracket+harpoon PCB 1.60mm
D*VxWxS700G30LF	30	200	female screw UNC 4.40	metal bracket+harpoon PCB 1.60mm
D*xWxS700M30LF	30	200	without	metal bracket
D*LxWxS700M30LF	30	200	insert M3	metal bracket
D*OxWxS700M30LF	30	200	insert UNC 4.40	metal bracket
D*VxWxS700M30LF	30	200	female screw UNC 4.40	metal bracket

shell size

E
A
A
B
C

LAYOUTS
xWx
2V2
3V3
3W3
5W5
8W8

PART NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES
D*xWxS743A30LF	30	500	without	without
D*LxWxS743A30LF	30	500	insert M3	without
D*OxWxS743A30LF	30	500	insert UNC 4.40	without
D*VxWxS743A30LF	30	500	female screw UNC 4.40	without
D*xWxS743H30LF	30	500	without	metal bracket+harpoon PCB 2.40mm
D*LxWxS743H30LF	30	500	insert M3	metal bracket+harpoon PCB 2.40mm
D*OxWxS743H30LF	30	500	insert UNC 4.40	metal bracket+harpoon PCB 2.40mm
D*VxWxS743H30LF	30	500	female screw UNC 4.40	metal bracket+harpoon PCB 2.40mm
D*xWxS743G30LF	30	500	without	metal bracket+harpoon PCB 1.60mm
D*LxWxS743G30LF	30	500	insert M3	metal bracket+harpoon PCB 1.60mm
D*OxWxS743G30LF	30	500	insert UNC 4.40	metal bracket+harpoon PCB 1.60mm
D*VxWxS743G30LF	30	500	female screw UNC 4.40	metal bracket+harpoon PCB 1.60mm
D*xWxS743M30LF	30	500	without	metal bracket
D*LxWxS743M30LF	30	500	insert M3	metal bracket
D*OxWxS743M30LF	30	500	insert UNC 4.40	metal bracket
D*VxWxS743M30LF	30	500	female screw UNC 4.40	metal bracket


Amphenol
FCi

spec ref	dr	1, Product Eng	2015/06/16	projection	mm	size	A2	scale	2:1
tolerance std	eng	Gregar Mathew	2020/12/04		←→	ecn no	ELX-33121-1	rel level	Released
ISO 406	chr	-							
ISO 1101	appr	Kuriakosa, San	2020/12/04						
TOLERANCES UNLESS OTHERWISE SPECIFIED		product family		SUB FEMALE DW US foot print		c01-8639-2309C		rev	
surface	linear	0.X	±0.3	full power rihgt angled solder				F	
		0.XX	±0.1						
		0.XXX	±0.05						
IS 1302	angular	0°	±2°	cat. no.		Product - Customer Drw		sheet 3 of 5	

© 2016 AFci


2V2

LAYOUT AND CONNECTOR DIMENSIONS
For PCB hole diameters see table I sheet I

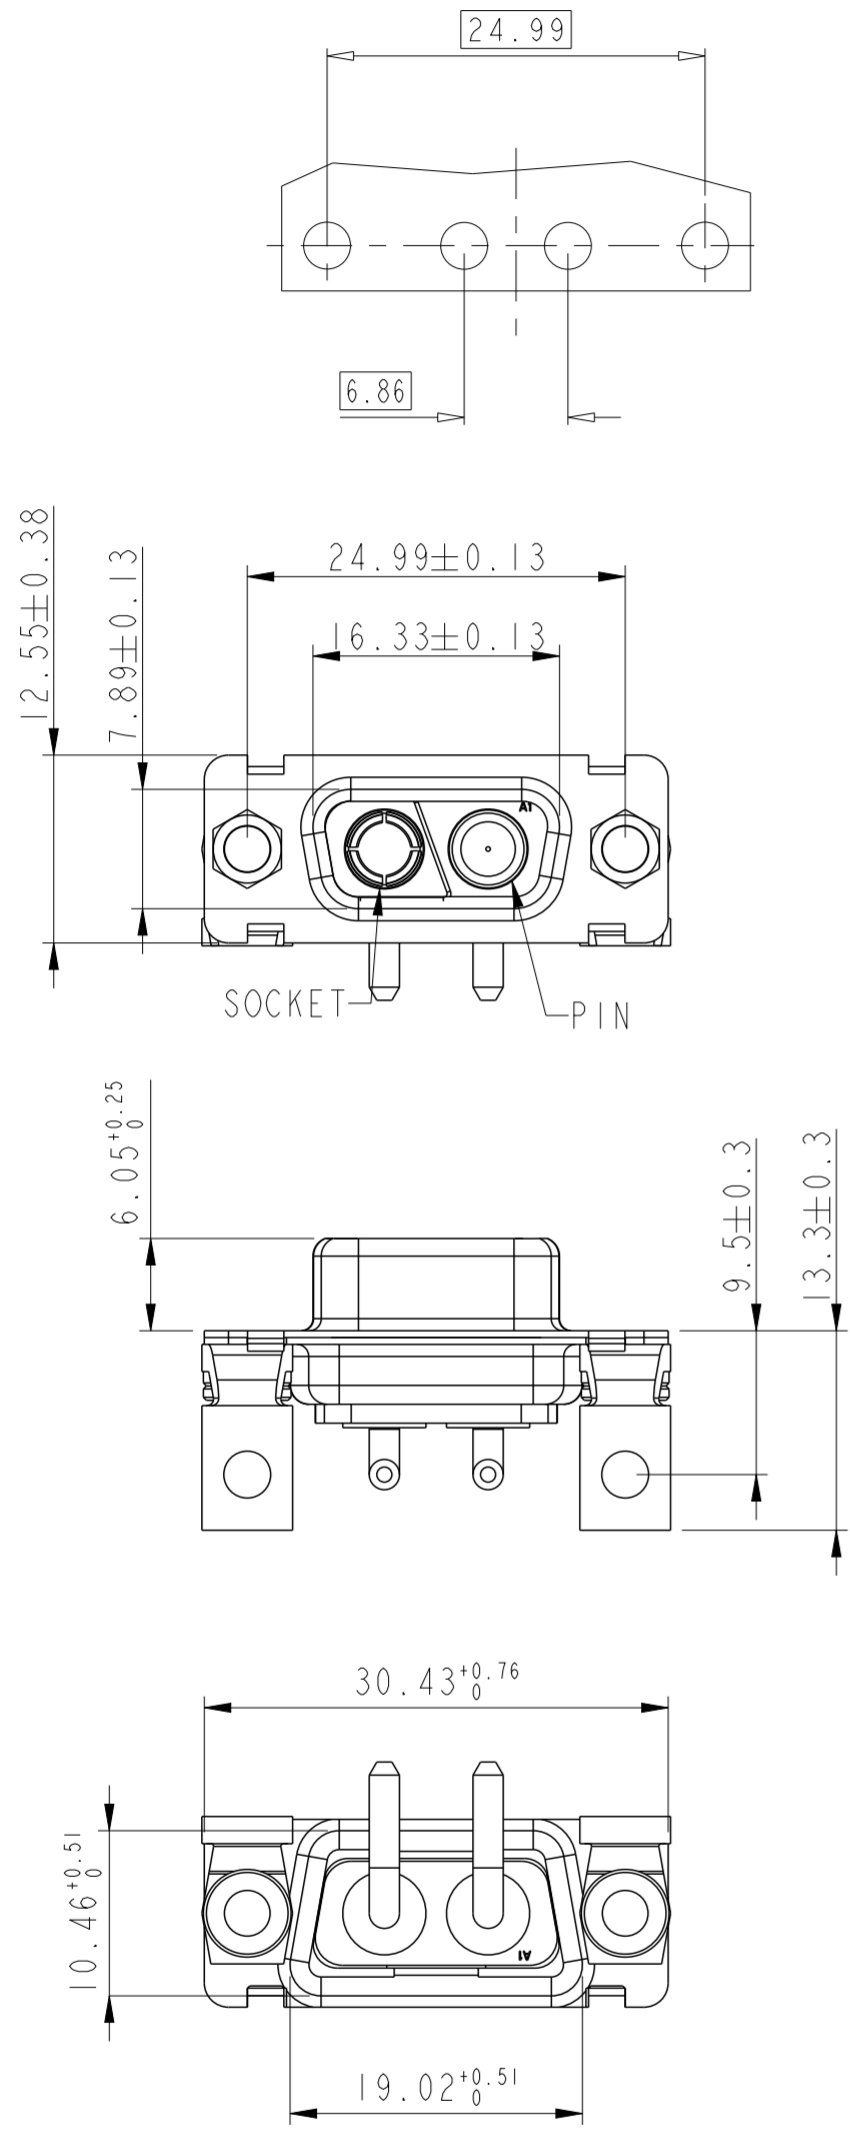


3V3

LAYOUT AND CONNECTOR DIMENSIONS
For PCB hole diameters see table I sheet I

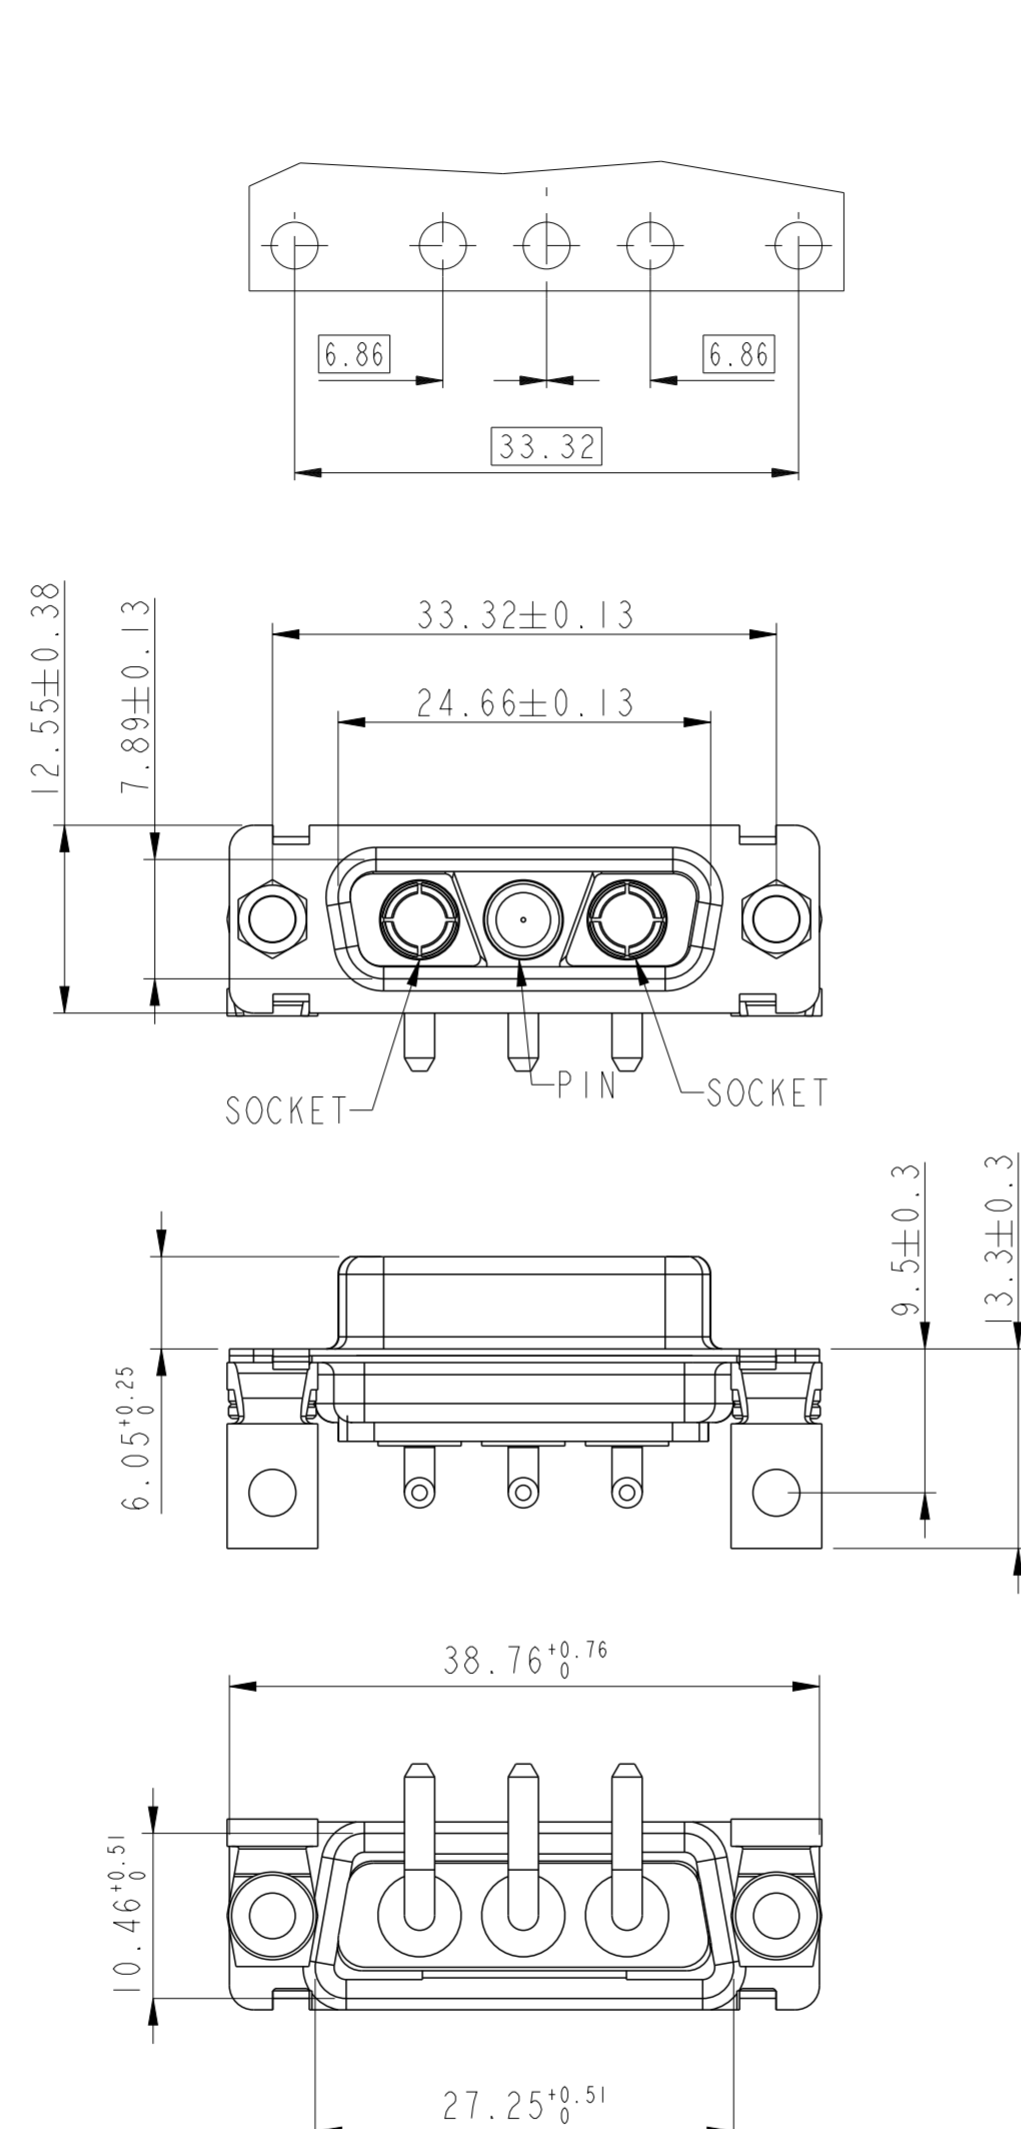


3W3

LAYOUT AND CONNECTOR DIMENSIONS
For PCB hole diameters see table I sheet I

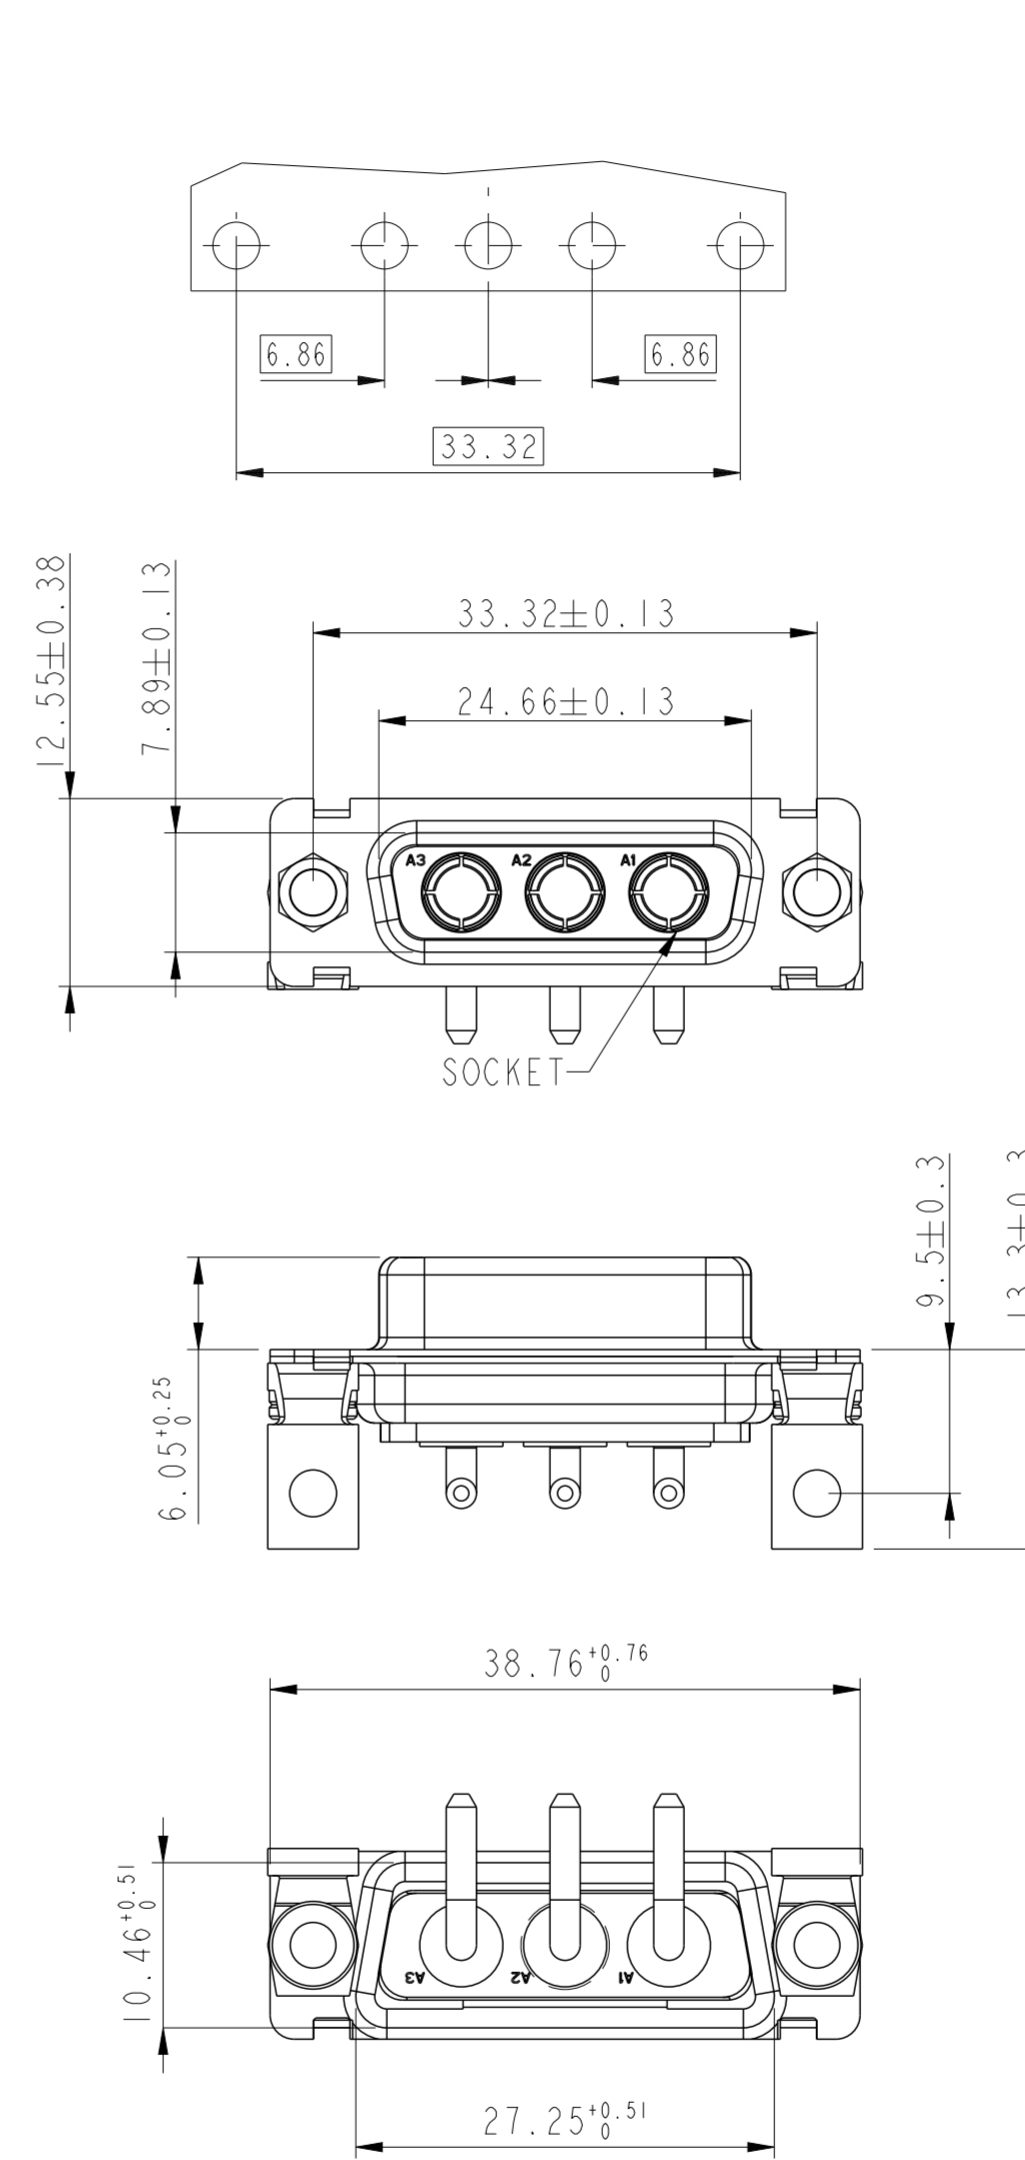

SIDE VIEW FOR ALL LAYOUTS

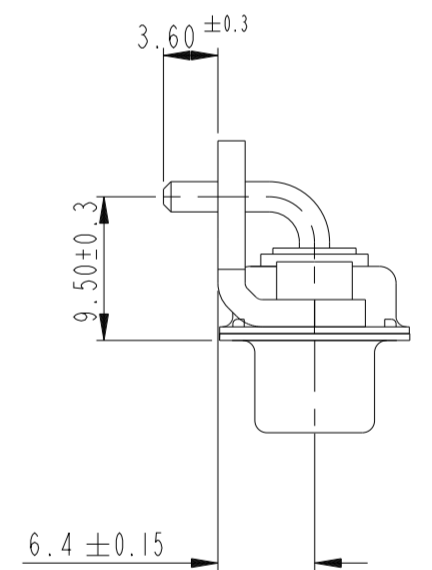




Amphenol
FCI

© 2016 APCI

spec ref	dr	1, Product Eng	2015/06/16	projection	mm	size	A2	scale	2:1
tolerance std	eng	Gregar Mathew	2020/12/04			ecn no	ELX-33121-1	rel level Released	rev F
ISO 406	chr	-	product family			-			
ISO 1101	appr	Kuriakosa, San	2020/12/04			-			
surface	linear	0.X	±0.3	Amphenol FCI		title SUB FEMALE DW US foot print full power rihgt angled solder		c01-8639-2309C	sheet 4 of 5
IS 1302	angular	0°	±2°	cat. no.		Product - Customer Drw		sheet 4 of 5	




5W5

LAYOUT AND CONNECTOR DIMENSIONS
For PCB hole diameters see table I sheet I

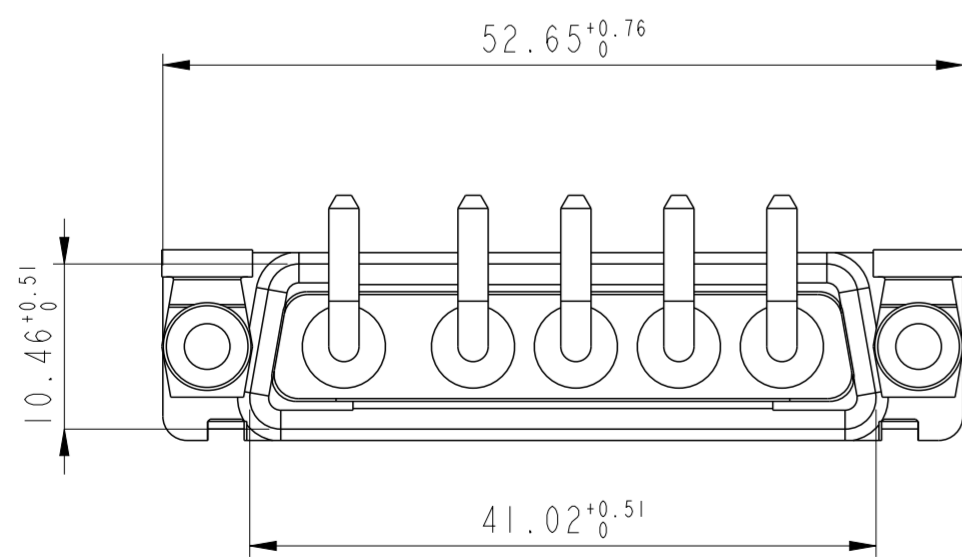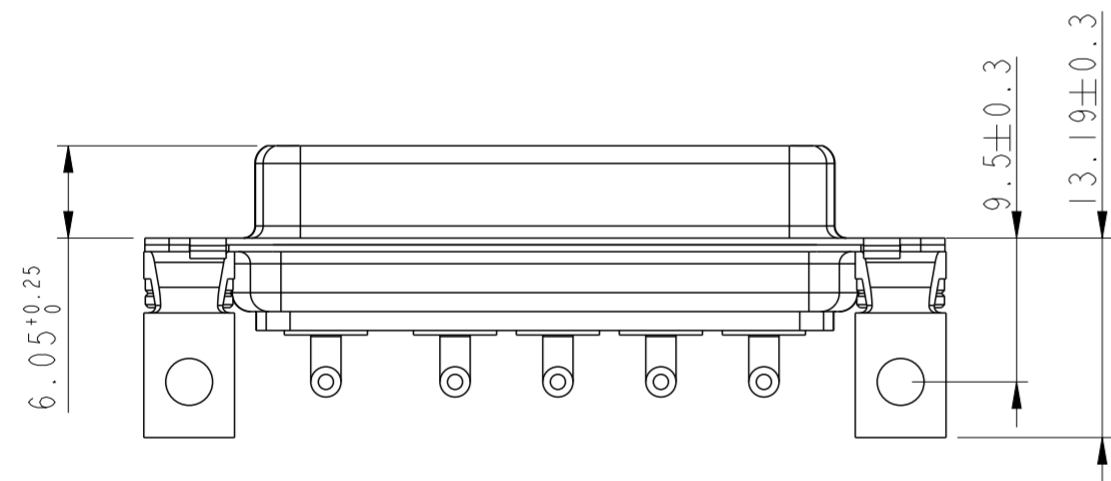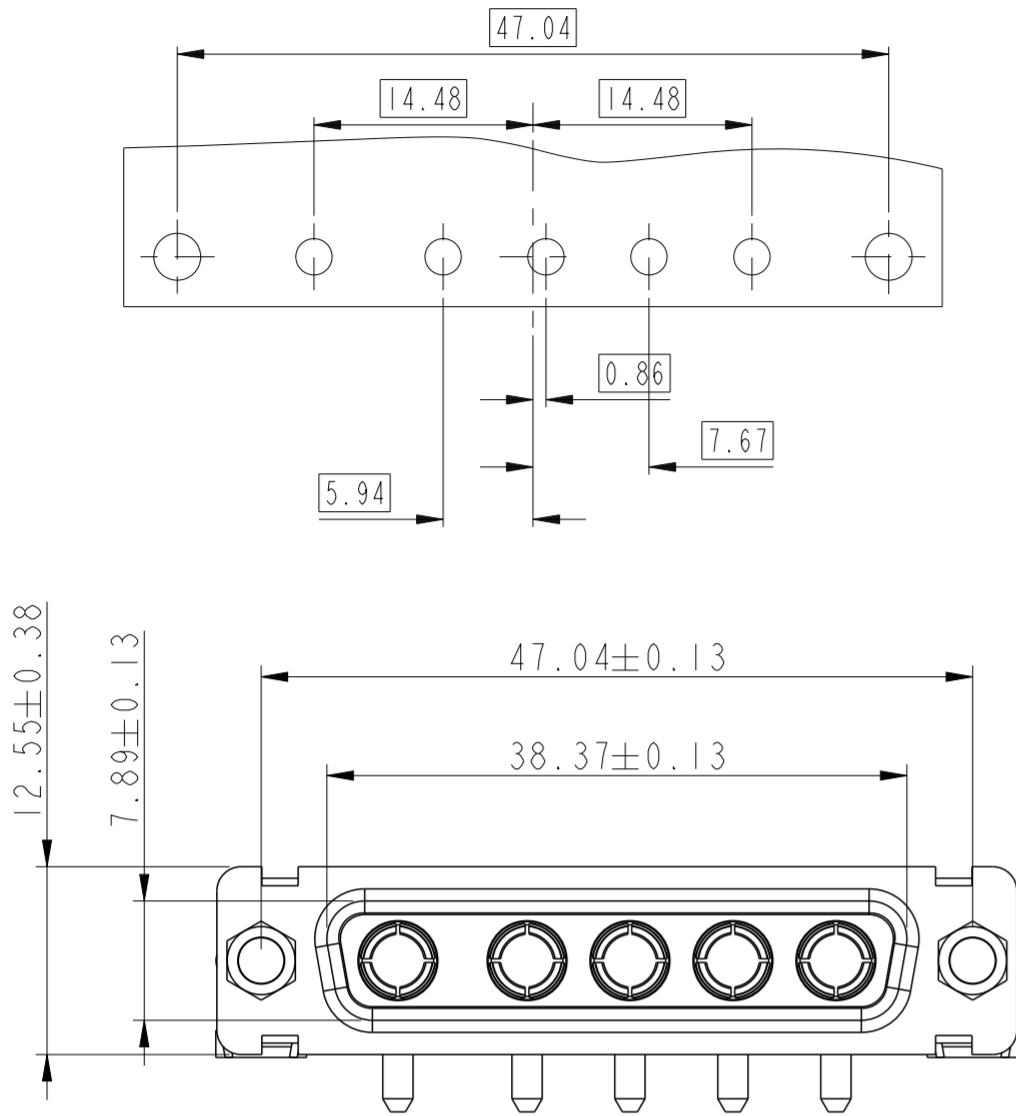

8W8

LAYOUT AND CONNECTOR DIMENSIONS
For PCB hole diameters see table I sheet I

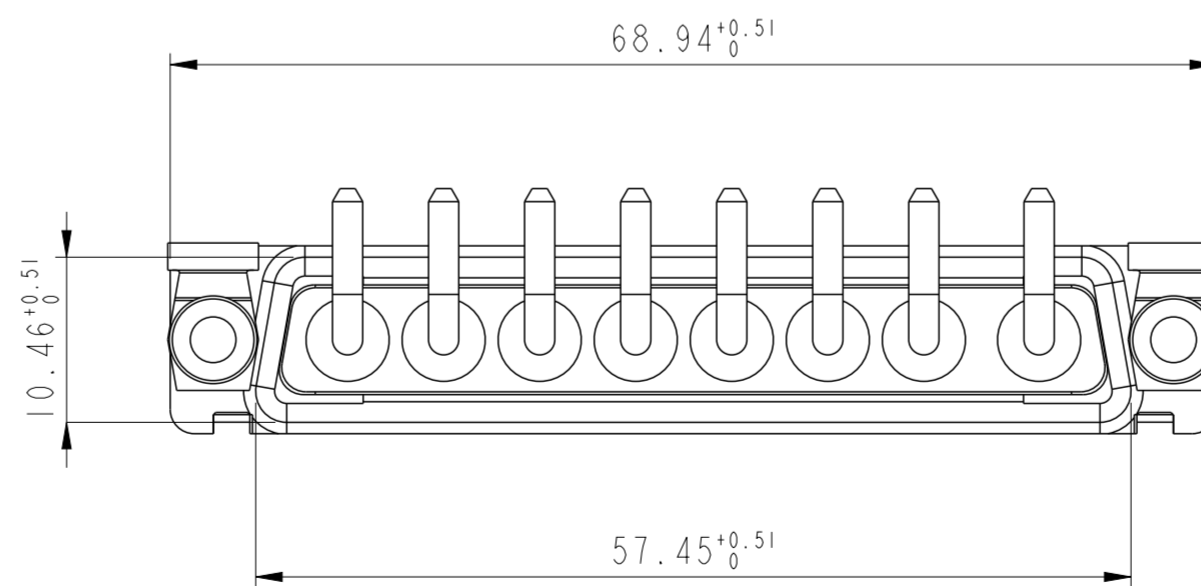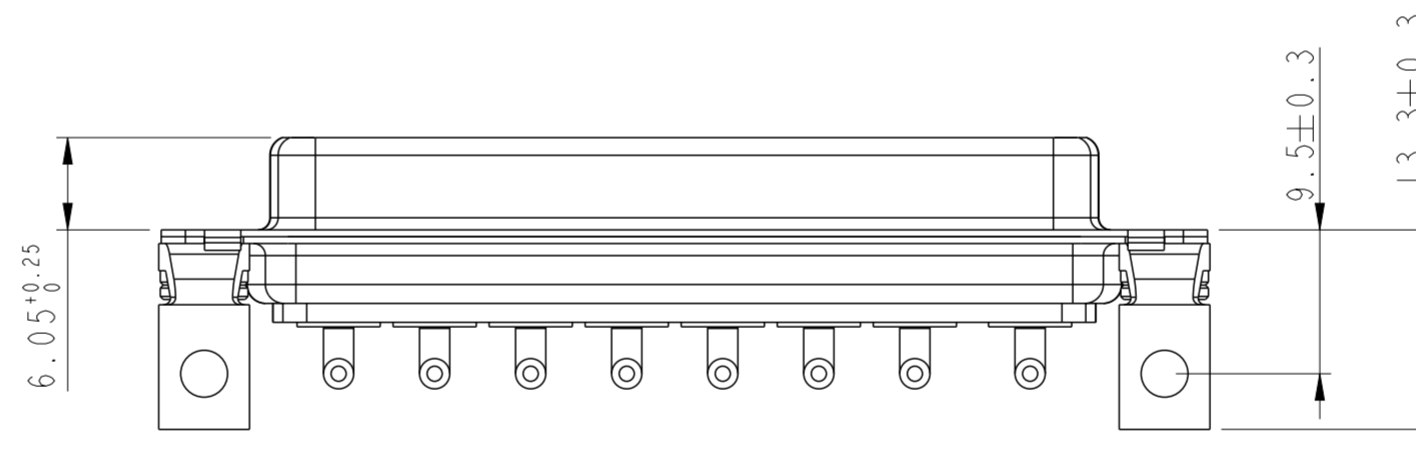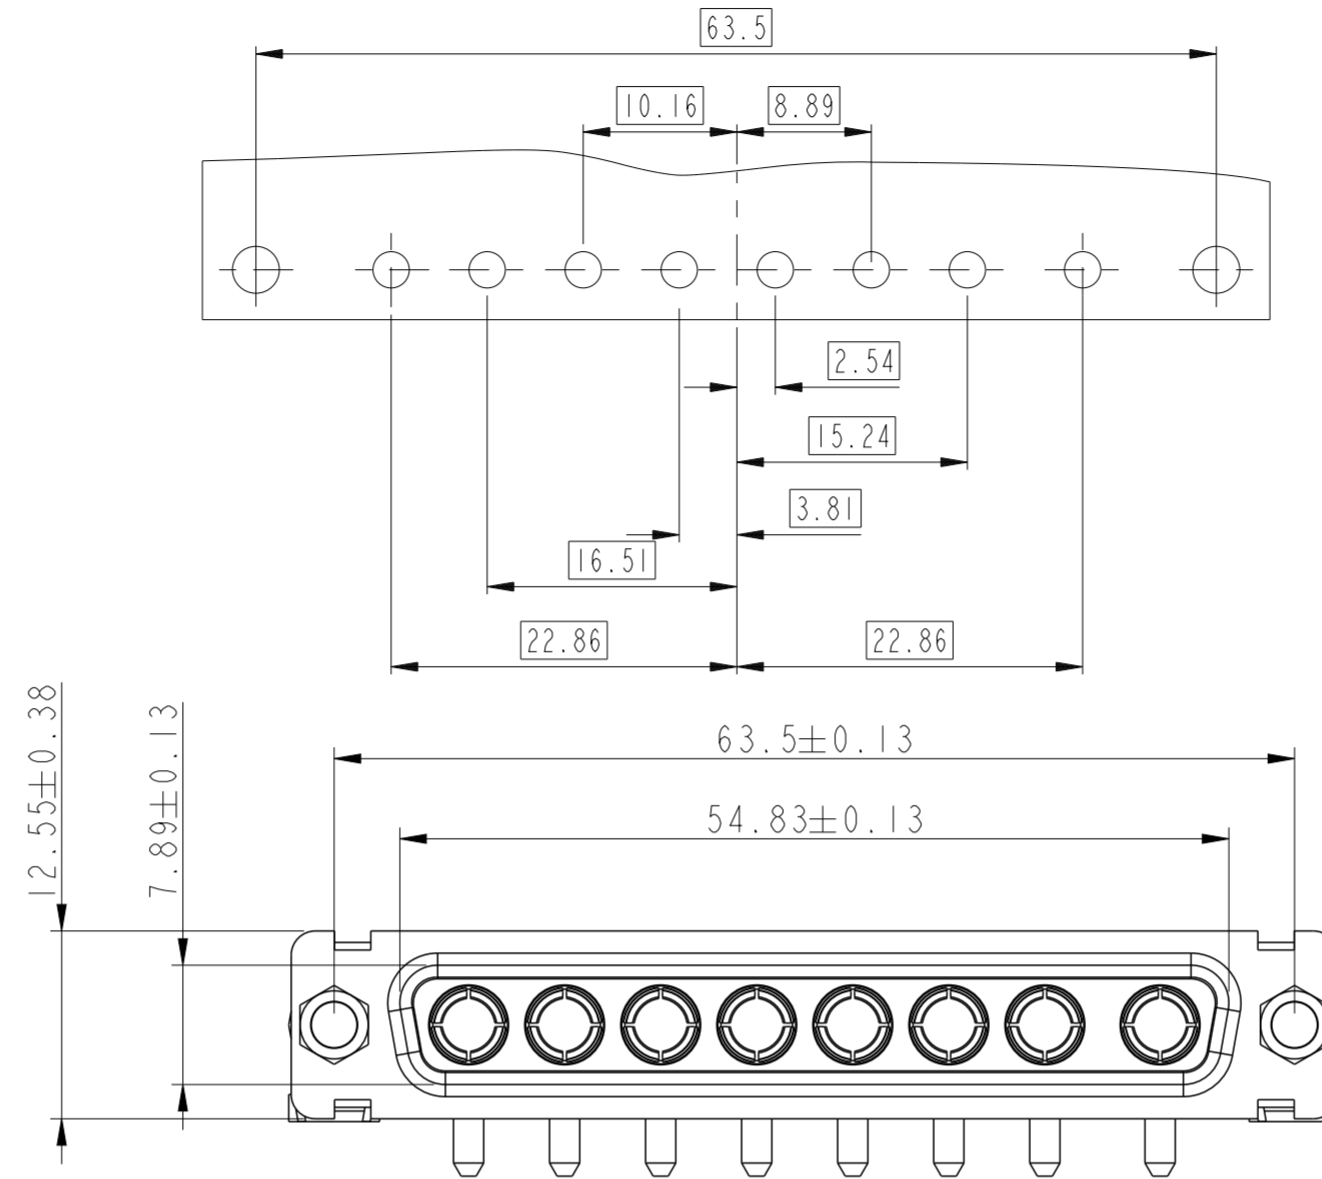

Amphenol
FCi

© 2016 AFci

spec ref	dr	1, Product Eng	2015/06/16	projection	mm	size	A2	scale	2:1	
tolerance std	eng	Gregar Mathew	2020/12/04			ecn no	ELX-33121-1			
ISO 406	chr	-	rel level			Released				
ISO 1101	appr	Kuriakosa, San	2020/12/04			Product - Customer Drw				
surface	linear	0.X	±0.3			title	SUB FEMALE DW US foot print		rev	F
IS 1302	angular	0.XX	±0.1			dwg no	c01-8639-2309C		sheet	5 of 5
		0.XXX	±0.05			cat. no.	-			
		0°	±2°			Product - Customer Drw	-			

PDS: Rev :F

STATUS:Released

Printed: Dec 18, 2020