


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00430	Connector, USB AB mini receptacle	1	
2	50-00433	Connector, USB B mini male	1	
3	30-00088	Wire, 4C, 1PR + 2C, 28 AWG, UL2725, 30V, 80C, 3.6 mm, shielded, VW-1, PVC, 79A, USB 2.0	1	
4	24-00059	Overmold, jack, USB mini AB	1	PVC, black
5	24-00025	Overmold, plug, USB mini B	1	PVC, black

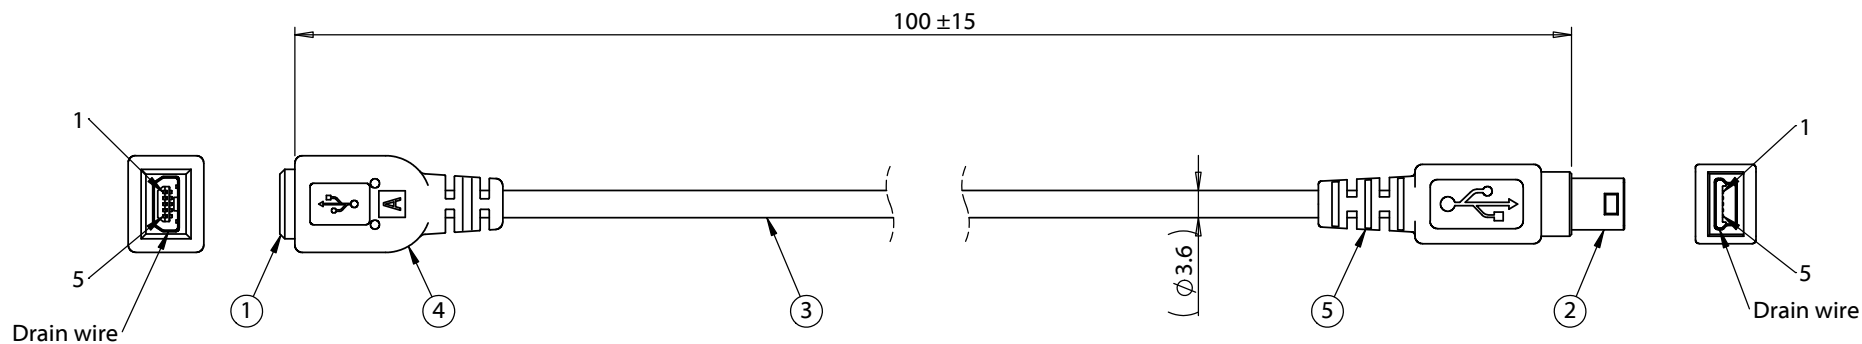

Wiring diagram		
50-00430	Wire Color	50-00433
1	Red	1
2	White	2
3	Green	3
5	Black	5
Shell	Drain & Shield	Shell

Notes:

Cables individually tied and bundled in groups of 10

Functionally equivalent components may be substituted

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>				
A	8/24/2011	Initial release	AW <small>Digitally signed by AW Date: 2018.11.01 09:44:54 -07'00'</small>			RoHS compliant			
A1	1/28/2014	Corrected shield type	Verified:	Function test: no open, no short circuit, no intermittent	<table border="1"> <tr> <td>Size:</td> <td>Part number:</td> </tr> <tr> <td>A</td> <td>10-00656</td> </tr> </table>	Size:	Part number:	A	10-00656
Size:	Part number:								
A	10-00656								
A2	10/24/2018	Removed label	GL <small>Digitally signed by GL Date: 2018.11.02 08:48:15 -07'00'</small>	Description:	Scale: 1:1				
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Cable, 100 mm, USB mini A receptacle to USB mini B 5P male, 28 AWG, 30-00088 wire					

5

4

3

2

1