



Part No: TG.30.8111W

Features:

600-6000MHz Operational

Wideband Cellular 5G/4G

Typical 70%+ Efficiency and 3dBi+ Peak Gair

Dipole Straight Terminal Antenna

Straight SMA(M) Connector

RoHS and REACH Compliant



2.	Introduction	2
	Specification Antonno Characteristics	
3. 4.	Antenna Characteristics Radiation Patterns	6 8
5.	Mechanical Drawing	42
6.	Packaging	43
	Changelog	44

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.











1. Introduction



The Apex White Straight TG.30 Dipole LTE Antenna - is primarily designed for use with 5G/4G modules and devices that require the highest possible efficiency and peak gain to deliver best in class throughput on all major cellular (5G/4G/3G/2G) bands worldwide for access points, terminals and routers. The antenna is a ground plane independent antenna with a SMA (M) connector.

The Apex exhibits high efficiency across the wide band and is backward compatible with 2G and 3G cellular applications such as GSM, LTE, UMTS, WI-FI and even has GPS included for Assisted GPS and/or E911 applications. With very high efficiency on every cellular band globally it is an ideal solution for any device requiring high, reliable performance. It is also guaranteed to meet any type approval or carrier certification requirements from a RF standpoint. It is an omni-directional antenna and the radiation patterns display this and are stable across all bands.

Typical Applications Include: Gateways and Routers Smart Metering Payment Terminals

It has a quality robust UV resistant housing for use with wireless terminals. This patented antenna is also available in black; with swivel mechanism and right angled versions. It is also available with swivel mechanism, hinged and right angle connectors. The connector can be changed subject to NRE or MOQ. For further information please contact your regional Taoglas customer support team.



2. Specification

LTE Electrical										
Band	Frequency (MHz)	Measurement	Efficiency (%)	Average Gain (dB)	Peak Gain (dBi)	Impedance	Polarization	Radiation	VSWR	
5GNR/4G		30X30cm Ground plane (Centre)	56.9	-2.45	1.98			Pattern		
Band 5,8,12,13,14,17,18,20	617-960	Free space	54.8	-2.62	3.00					
,26,27,28,29,71		30X30cm Ground plane (Edge)	53.5	-2.72	2.66					
		30X30cm Ground plane (Centre)	54.6	-2.63	5.94					
5GNR/4G Band 21,32,74,75,76	1427-1518	Free space	49.8	-3.02	4.81					
24.14 22,02,7 1,7 3,7 3		30X30cm Ground plane (Edge)	65.3	-1.85	3.10					
4G/3G		30X30cm Ground plane (Centre)	70.8	-1.50	3.18					
Band 1,2,3,4,9,23,25,35,39,	1710-2200	Free space	78.3	-1.06	4.03					
66		30X30cm Ground plane (Edge)	67.8	-1.69	3.91					
	2300-2400	30X30cm Ground plane (Centre)	61.5	-2.11	3.75					
4G/3G Band 40		Free space	75.0	-1.25	4.01					
Ballu 40		30X30cm Ground plane (Edge)	67.0	-1.74	3.63					
		30X30cm Ground plane (Centre)	31.9	-4.96	2.49	50 Ω	Linear	Omni	3 MAX	
Wi-Fi 2400	2400-2500	Free space	63.1	-2.00	3.32					
2.00			30X30cm Ground plane (Edge)	59.3	-2.27	3.42				
		30X30cm Ground plane (Centre)	38.3	-4.17	7.15					
4G/3G Band 7,38,41	2490-2690	Free space	61.4	-2.12	4.73					
		30X30cm Ground plane (Edge)	48.5	-3.15	4.67					
5GNR/4G	3300-3800	30X30cm Ground plane (Centre)	34.0	-4.69	5.17					
Band		Free space	42.4	-3.73	4.84					
22,42,43,48,77,78		30X30cm Ground plane (Edge)	36.8	-4.34	4.20					
	Ground p	30X30cm Ground plane (Centre)	41.2	-3.85	8.37					
LTE5200/ Wi-Fi 5800	5150-5925	Free space	61.8	-2.09	6.52					
		30X30cm Ground plane (Edge)	41.3	-3.84	4.34					



Mechanical				
Casing	UV Resistant PC/ABS			
Flammability Rating	UL-94			
Connector	SMA Male Straight			

Environmental				
Temperature Range	-40°C to 85°C			
Humidity	Non-condensing 65°C 95% RH			




		5G/4G	Bands		
Band Number		5GNR / FR1 / LTE / LTE-	Advanced / WCDMA / HSPA	A / HSPA+ / TD-SCDM	A
	Uplink	Downlink	30X30cm Ground plane (Centre)	Free space	30X30cm Ground plane
B1	1920 to 1980	2110 to 2170	. ✓	✓	✓
B2	1850 to 1910	1930 to 1990	✓	✓	✓
В3	1710 to 1785	1805 to 1880	✓	✓	✓
B4	1710 to 1755	2110 to 2155	✓	✓	✓
B5	824 to 849	869 to 894	✓	✓	✓
В7	2500 to 2570	2620 to 2690	✓	✓	✓
B8	880 to 915	925 to 960	✓	✓	✓
B9*	1749.9 to 1784.9	1844.9 to 1879.9	✓	✓	✓
B11	1427.9 to 1447.9	1475.9 to 1495.9	*	✓	✓
B12	699 to 716	729 to 746	✓	✓	✓
B13	777 to 787	746 to 756	✓	✓	✓
B14	788 to 798	758 to 768	✓	✓	✓
B17	704 to 716	734 to 746	✓	✓	✓
B18	815 to 830	860 to 875	✓	✓	✓
B19	830 to 845	875 to 890	✓	✓	✓
B20	832 to 862	791 to 821	✓	✓	✓
B21	1447.9 to 1462.9	1495.9 to 1510.9	✓	✓	✓
B22*	3410 to 3490	3510 to 3590	✓	✓	√
B23*	2000 to 2020	2180 to 2200	✓	√	· •
B24	1626.5 to 1660.5	1525 to 1559	· ✓	✓	· ✓
B25	1850 to 1915	1930 to 1995	· ✓	· /	· ✓
B26	814 to 849	859 to 894	· ✓	· /	√
B27*	807 to 824	852 to 869	· ✓	·	· /
B28	703 to 748	758 to 803	, ✓	· /	·
B29		0 728	v ✓	· ·	*
B30	2305 to 2315	2350 to 2360	, ✓	· /	*
B31			*	*	*
	452.5 to 457.5	462.5 to 467.5	. ✓		→
B32		o 1496	▼	▼	→
B34		0 2025	∀	∀	∀
B35		0 1910	∀	∀	→
B36		o 1990 - 1930	∀	∀	→
B37		o 1930	∀	▼	→
B38		0 2620	∀	∀	→
B39		0 1920	∀	*	
B40		o 2400	∀	•	√
B41		o 2690	∀	✓	→
B42		o 3600			
B43		o 3800	√	√	√
B45		o 1467	√	√	√
B46		o 5925	*	√	*
B47		o 5925	*	V	*
B48		o 3700	*	*	*
B49		o 3700	√	Y	*
B50		0 1517	Y	*	Y
B51		0 1432	*	V	√
B52		o 3400	* ✓	Y	* ✓
B53		to 2495		v	Y
B65	1920 to 2010	2110 to 2200	✓	*	-
B66	1710 to 1780	2110 to 2200	✓	√	√
B68	698 to 728	753 to 783	✓	∀	✓,
B69		o 2620	✓.	√	V
B70	1695 to 1710	1995 to 2020	√	√	√
B71	663 to 698	617 to 652	*	*	
B72	451 to 456	461 to 466	*	36	
B73	450 to 455	460 to 465	*	*	*
B74	1427 to 1470	1475 to 1518	✓	✓,	✓
B75		o 1517	✓	✓.	✓,
B76		o 1432	*	✓,	✓,
B77		o 4200	✓	✓,	√
B78		o 3800	✓	✓.	✓,
B79		o 5000	✓	✓.	✓,
B85	698 to 716	728 to 746	✓	✓	✓
B87	410 to 415	420 to 425	*	*	*
B88	412 to 417	422 to 427	*	*	*




3. Antenna Characteristics

3.1 Return Loss

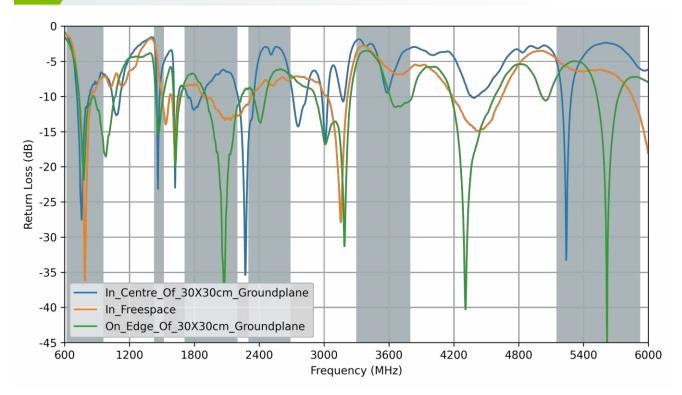


3.2 Efficiency

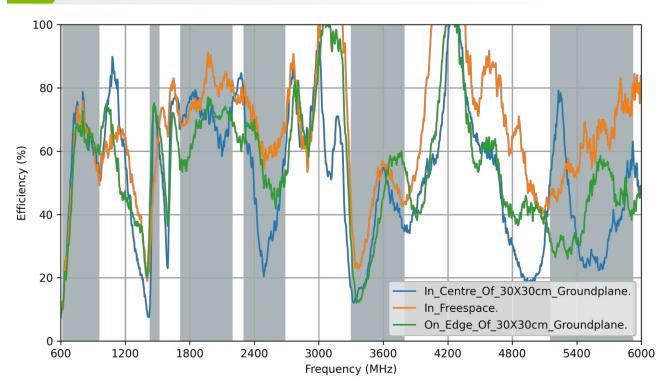




3.3 Average Gain

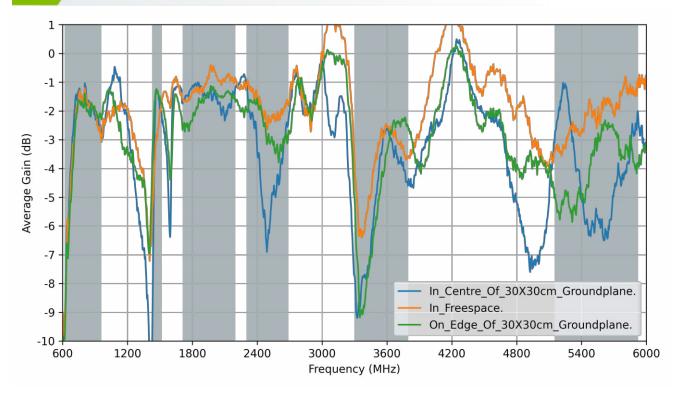


3.4 Peak Gain

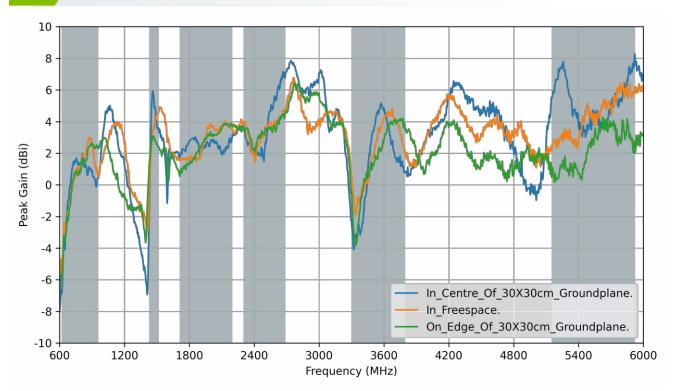




4. Radiation Patterns


4.1 Test Setup

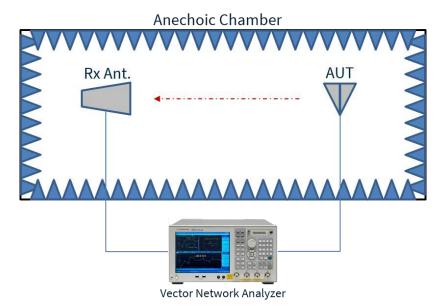


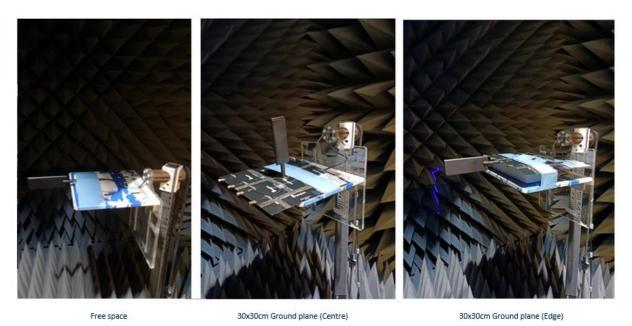




4.2 30x30cm Ground plane (Centre) - Patterns at 650 MHz

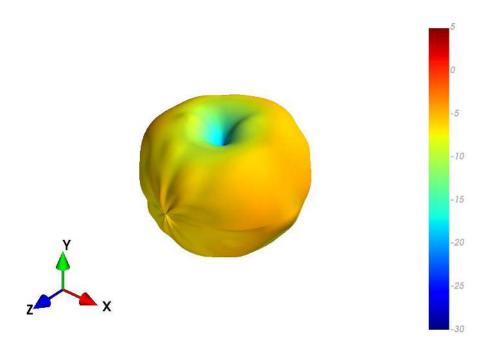


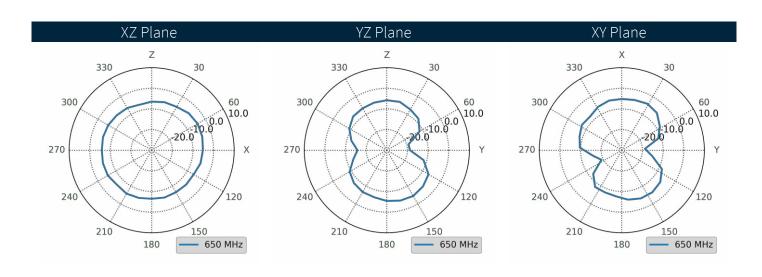




4.3 Free space - Patterns at 650 MHz

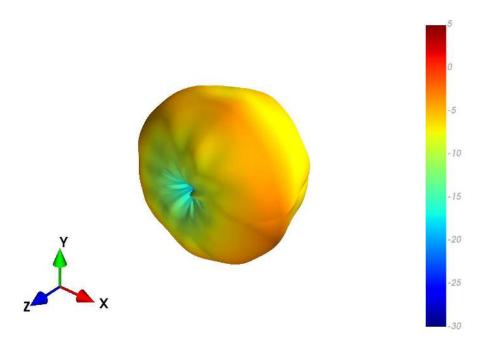


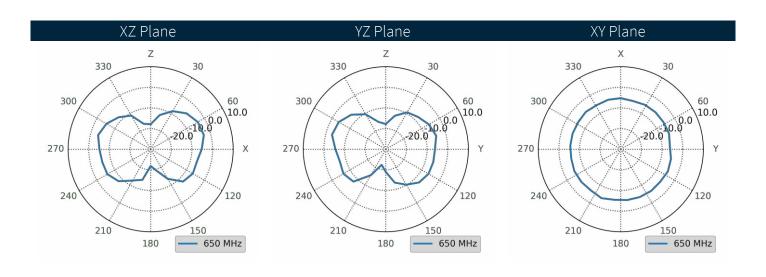



30x30cm Ground plane (Edge) - Patterns at 650 MHz

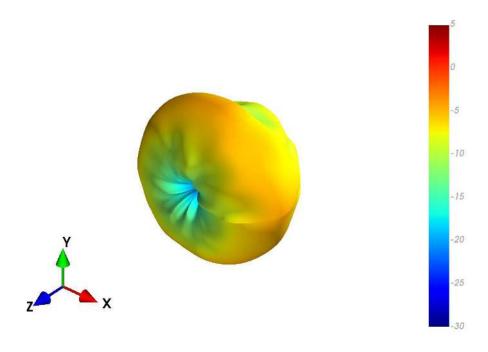


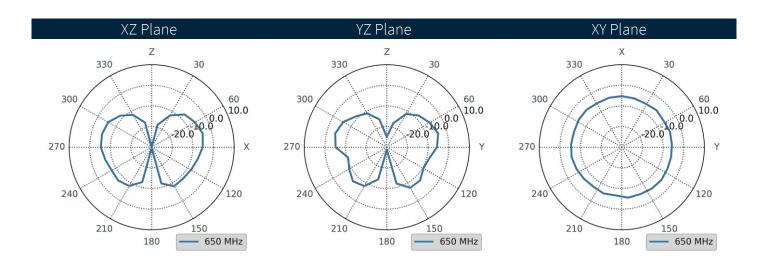


4.4




30x30cm Ground plane (Centre) - Patterns at 750 MHz

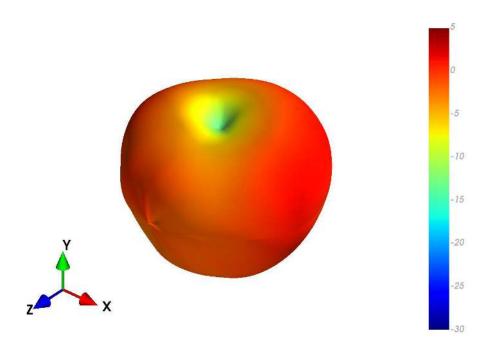


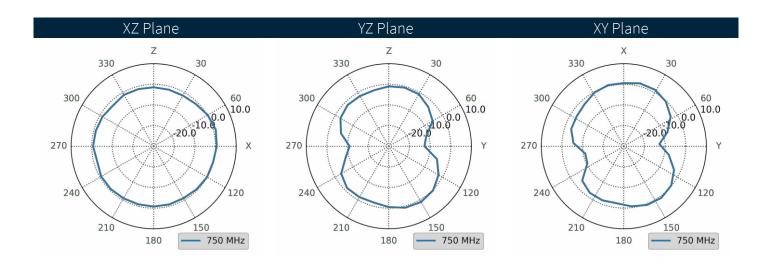




4.6 Free space - Patterns at 750 MHz

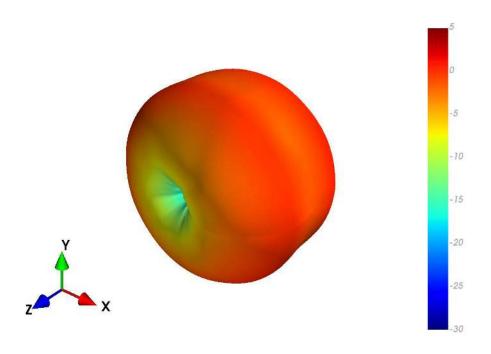


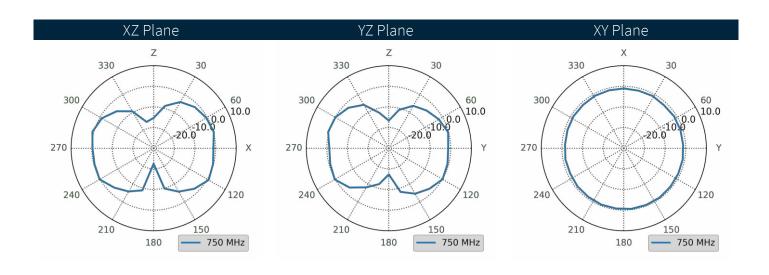




30x30cm Ground plane (Edge) - Patterns at 750 MHz

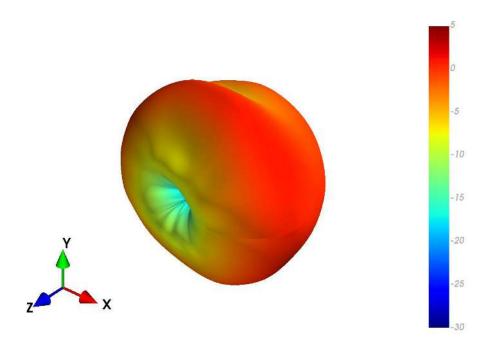


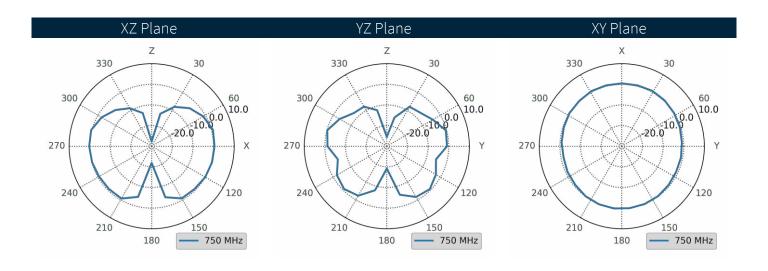




30x30cm Ground plane (Centre) - Patterns at 890 MHz

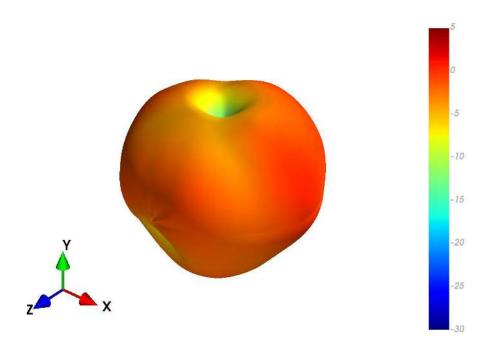


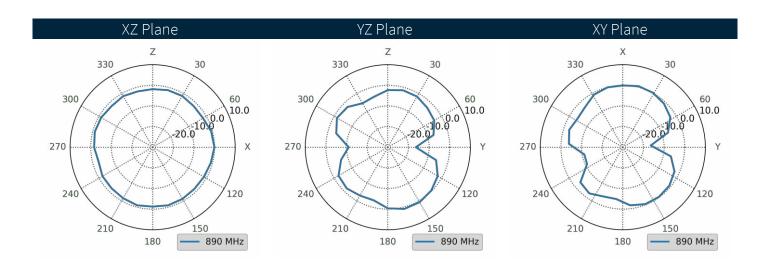




.9 Free space - Patterns at 890 MHz

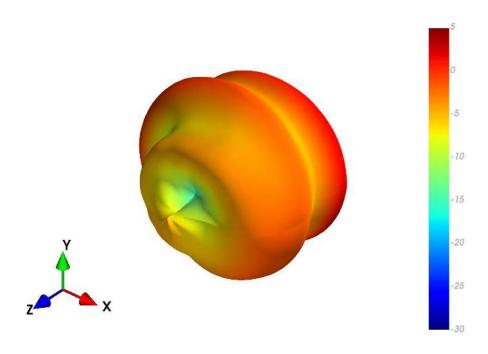


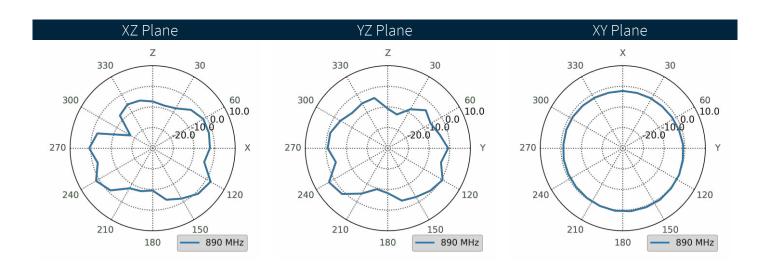




4.10 30x30cm Ground plane (Edge) - Patterns at 890 MHz

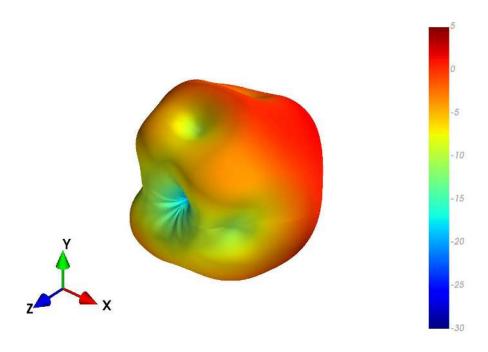


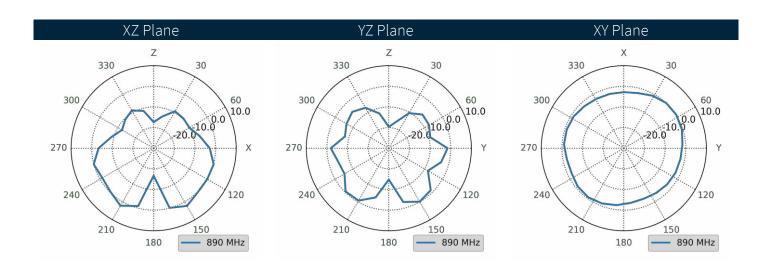




4.11 30x30cm Ground plane (Centre) - Patterns at 960 MHz

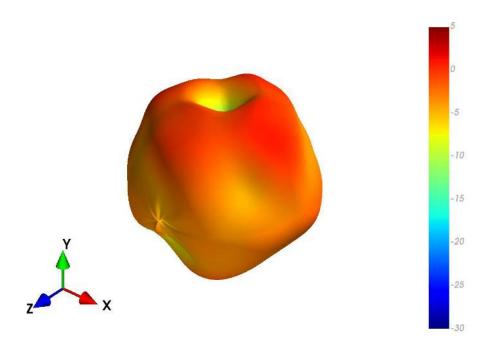


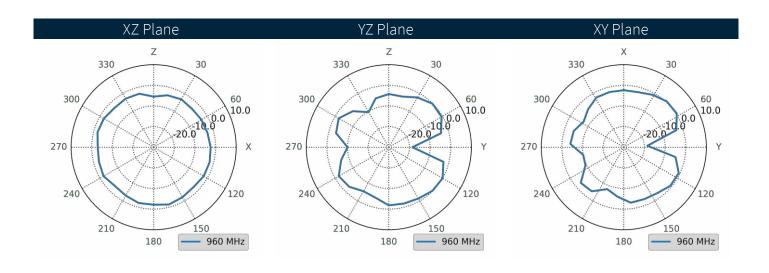




4.12 Free space - Patterns at 960 MHz

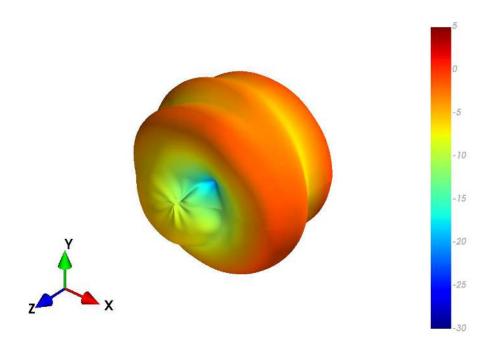


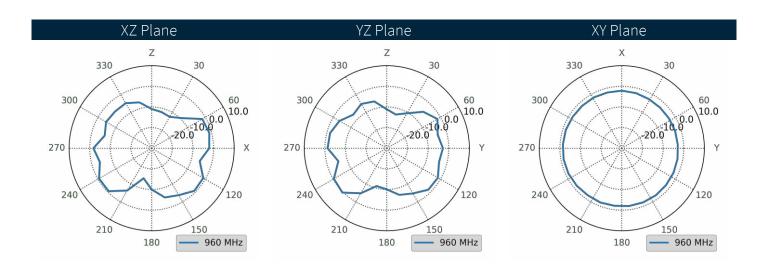




4.13 30x30cm Ground plane (Edge) - Patterns at 960 MHz

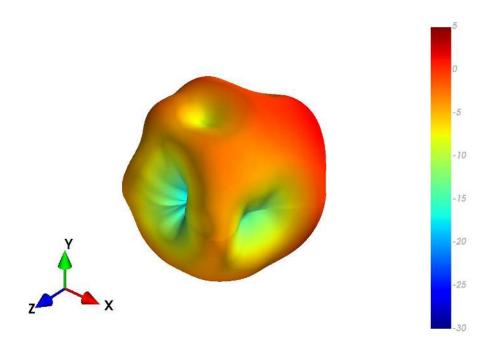


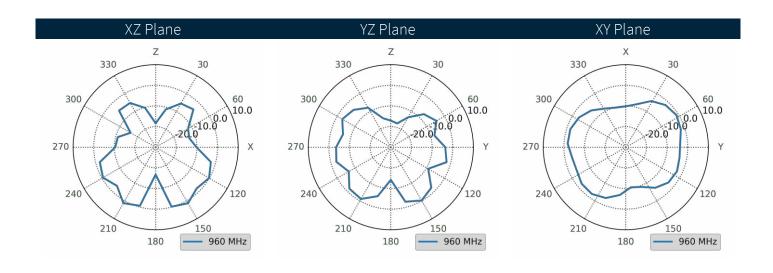




4.14 30x30cm Ground plane (Centre) - Patterns at 1470 MHz

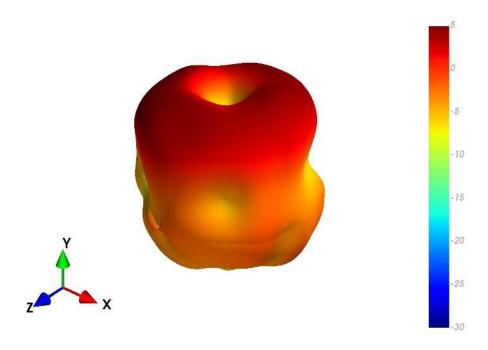


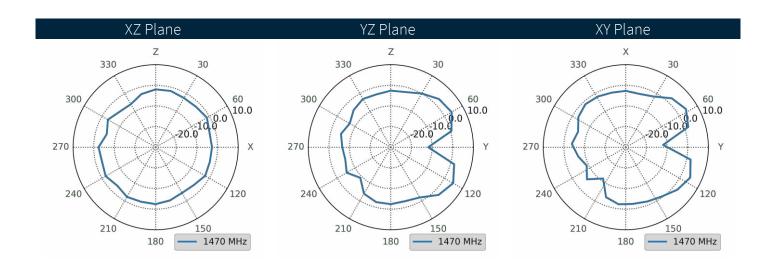




4.15 Free space - Patterns at 1470 MHz

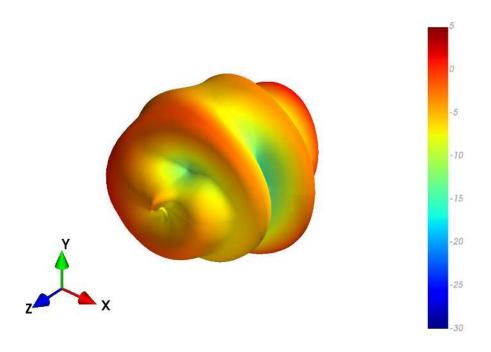


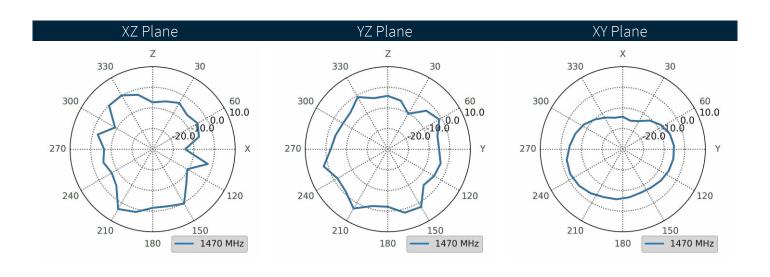




4.16 30x30cm Ground plane (Edge) - Patterns at 1470 MHz

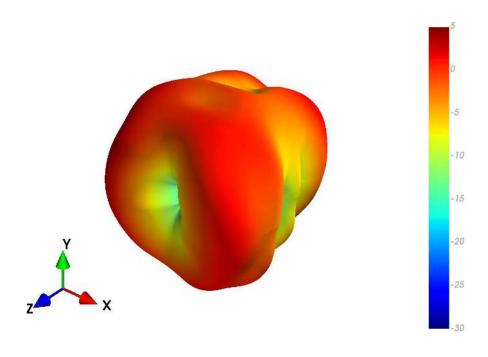


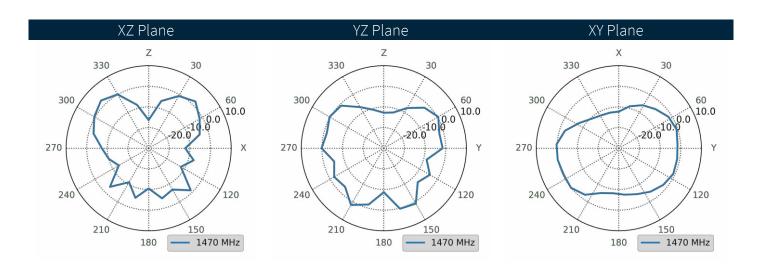




4.17 30x30cm Ground plane (Centre) - Patterns at 1805 MHz

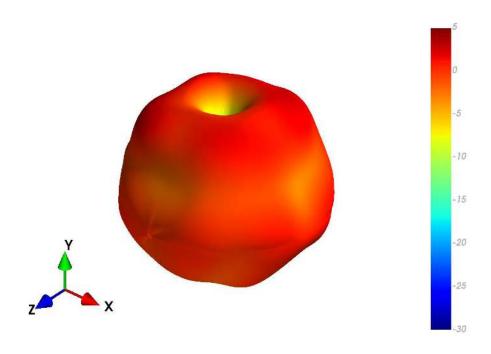


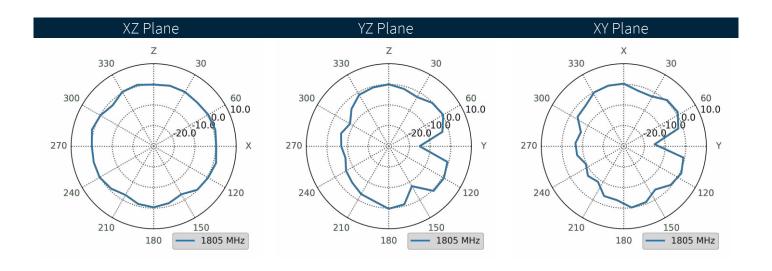




4.18 Free space - Patterns at 1805 MHz

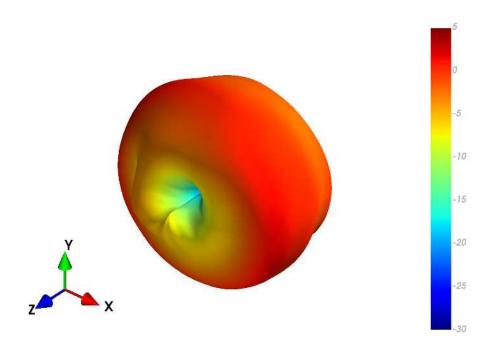


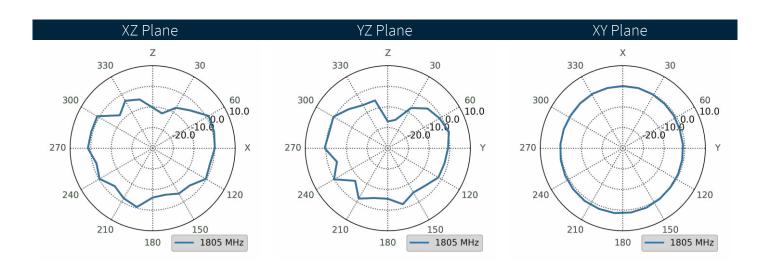




4.19 30x30cm Ground plane (Edge) - Patterns at 1805 MHz

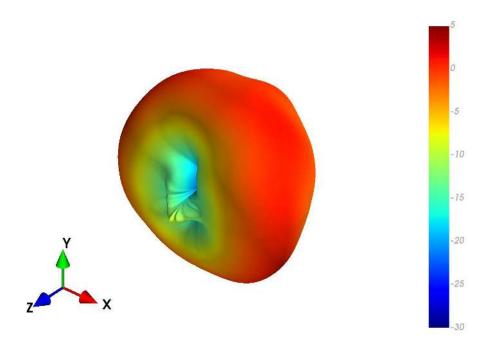


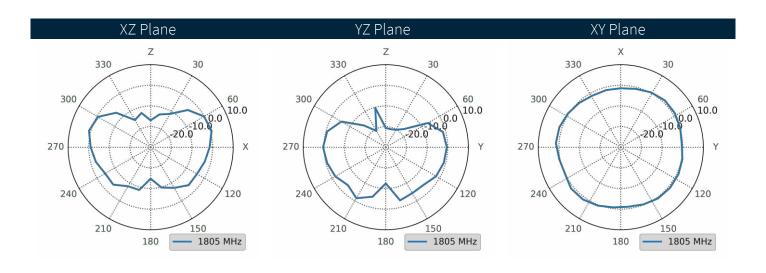




4.20 30x30cm Ground plane (Centre) - Patterns at 1920 MHz

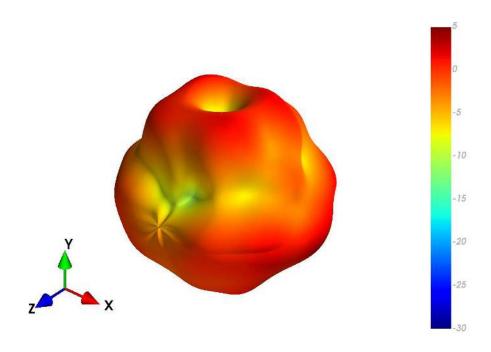


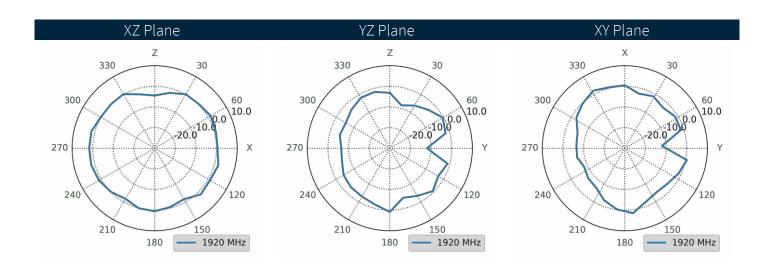




4.21 Free space - Patterns at 1920 MHz

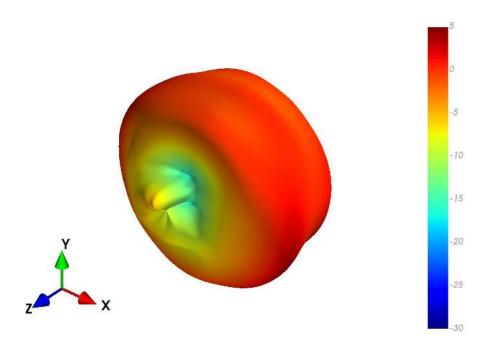


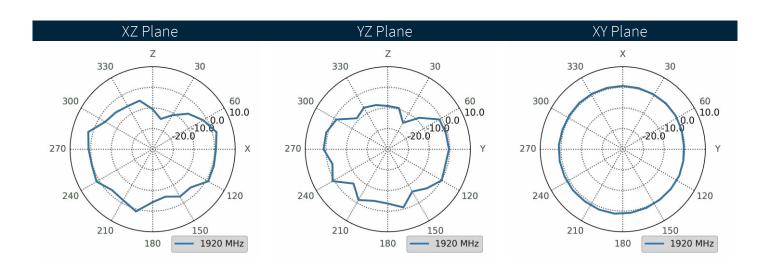




4.22 30x30cm Ground plane (Edge) - Patterns at 1920 MHz

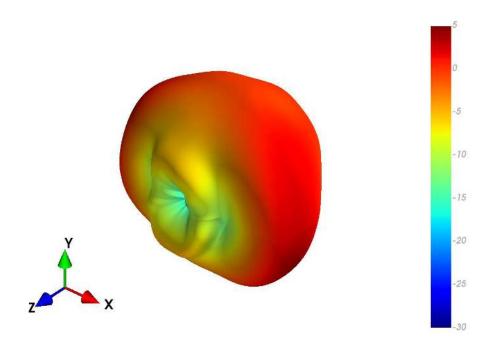


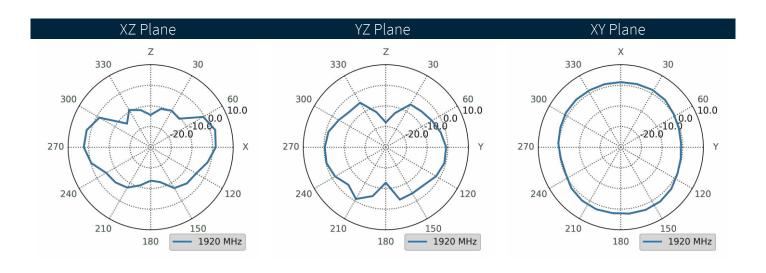




4.23 30x30cm Ground plane (Centre) - Patterns at 2595 MHz

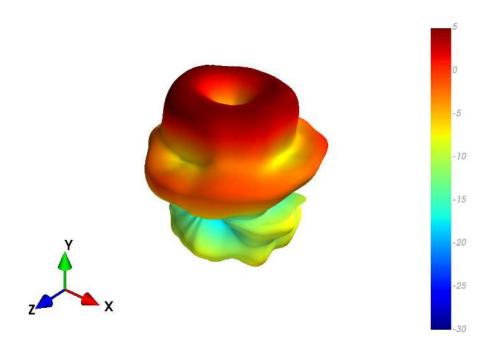


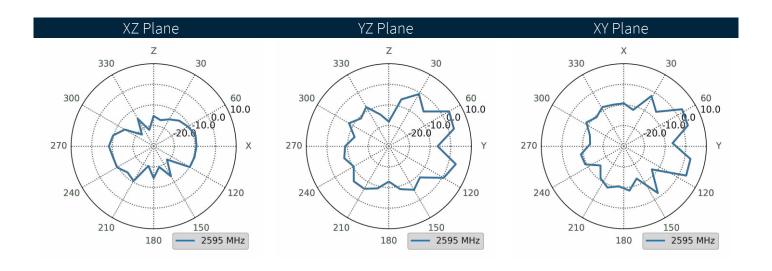




4.24 Free space - Patterns at 2595 MHz

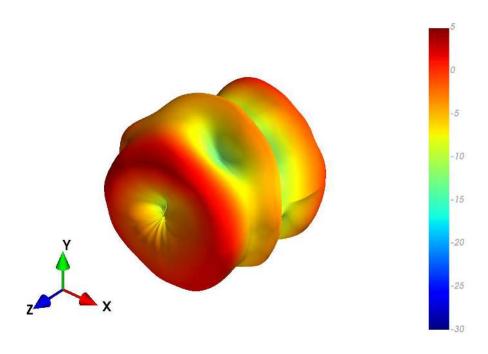


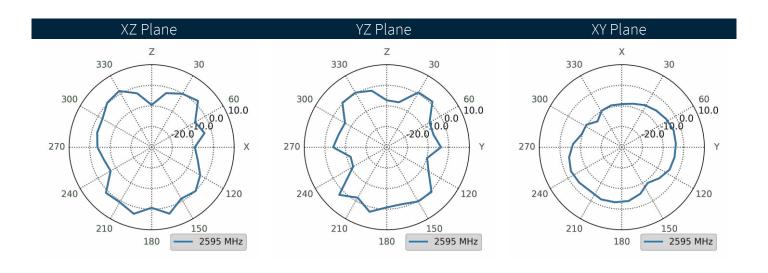




4.25 30x30cm Ground plane (Edge) - Patterns at 2595 MHz

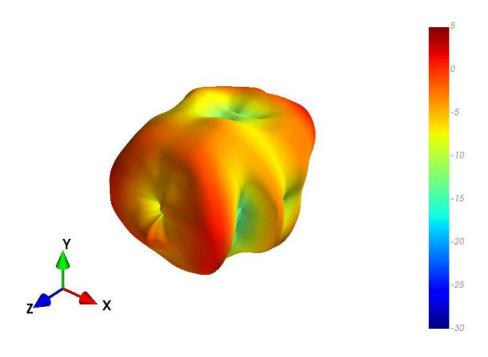


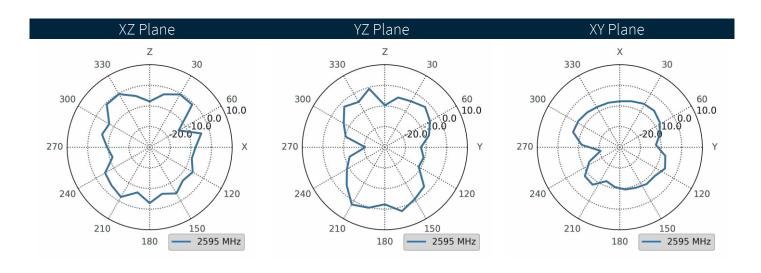




4.26 30x30cm Ground plane (Centre) - Patterns at 3500 MHz

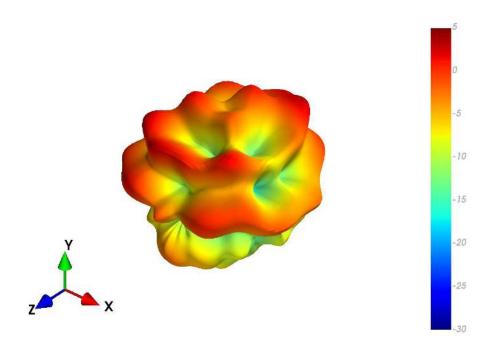


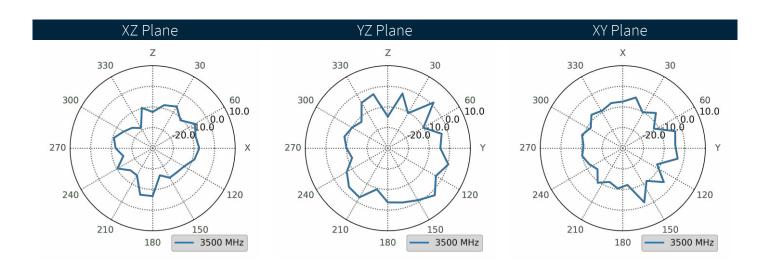




4.27 Free space - Patterns at 3500 MHz

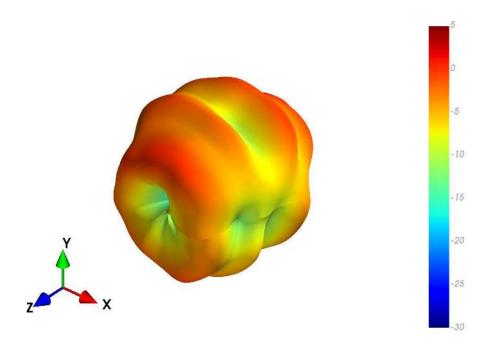


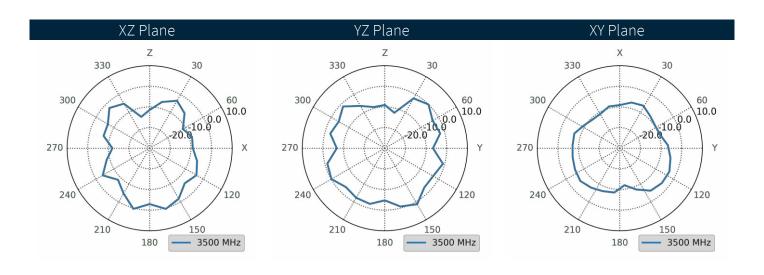




4.28 30x30cm Ground plane (Edge) - Patterns at 3500 MHz

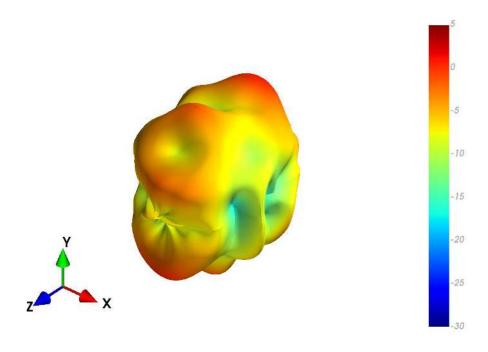


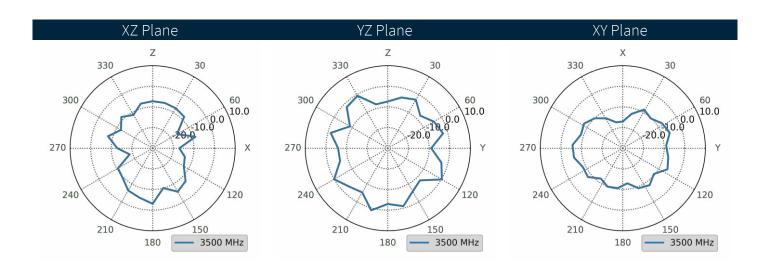




4.29 30x30cm Ground plane (Centre) - Patterns at 5150 MHz

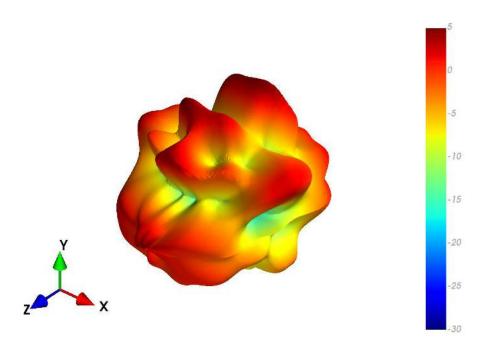


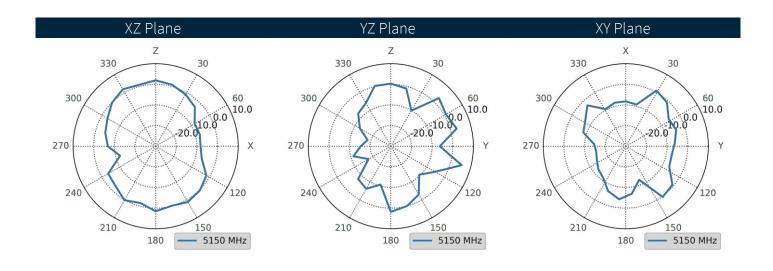




4.30 Free space - Patterns at 5150 MHz

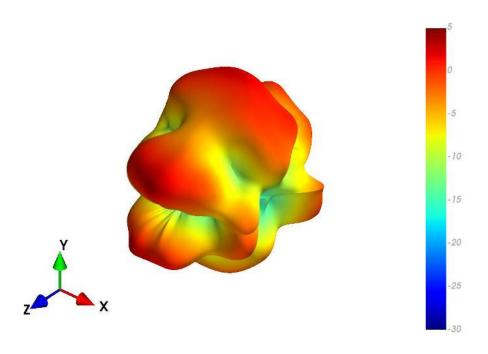


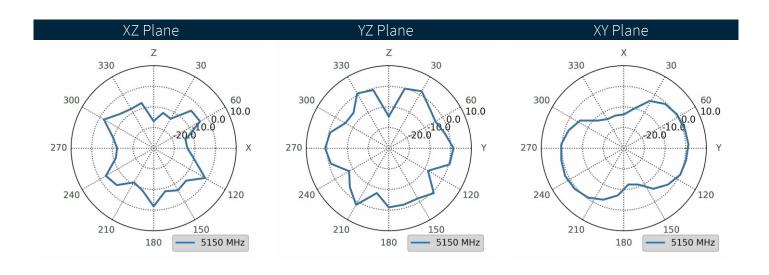




4.31 30x30cm Ground plane (Edge) - Patterns at 5150 MHz

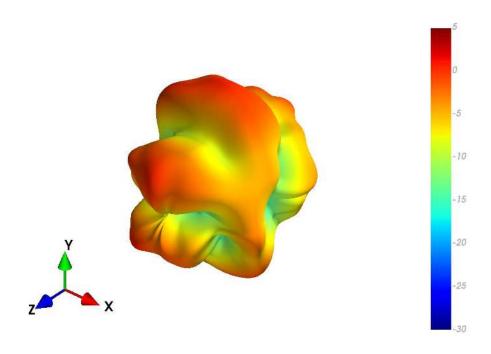


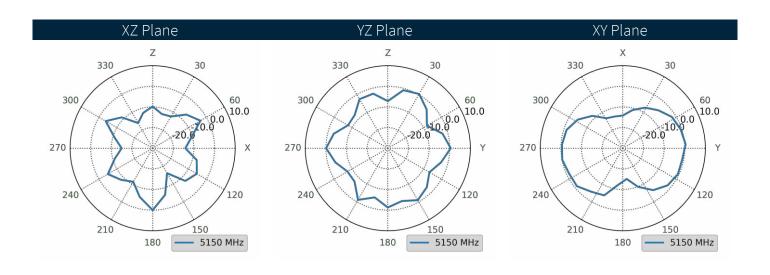




4.32 30x30cm Ground plane (Centre) - Patterns at 5550 MHz

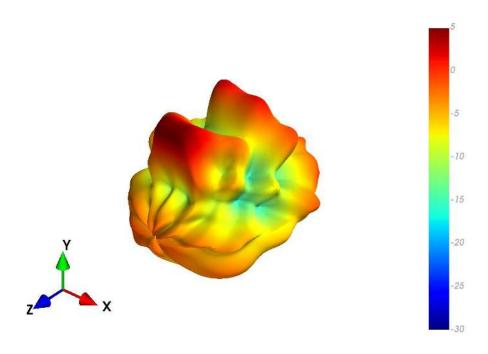


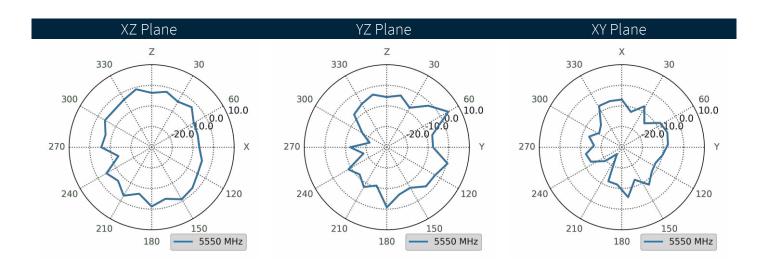




4.33 Free space - Patterns at 5550 MHz

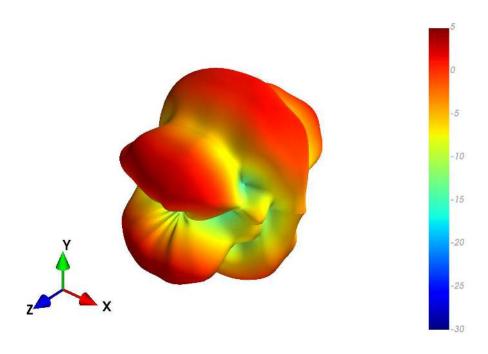


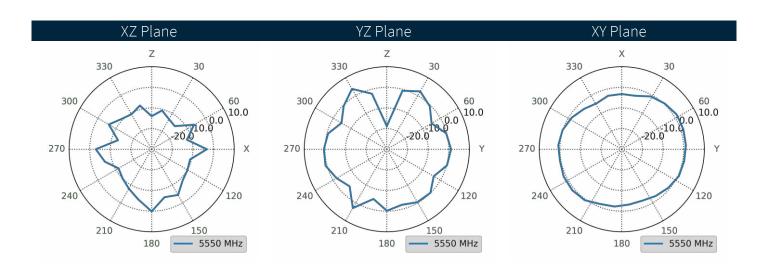




4.34 30x30cm Ground plane (Edge) - Patterns at 5550 MHz

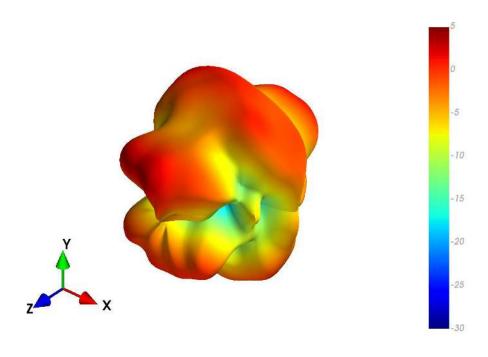

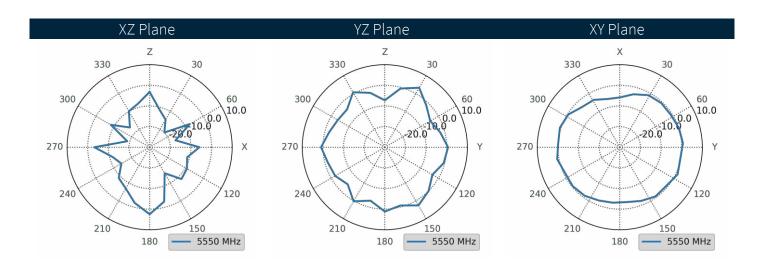



Mechanical Drawing

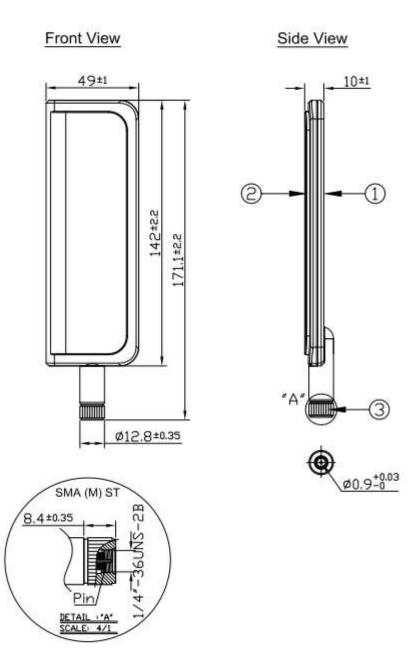




6. Packaging

1pc TG.30.8111W per Small PE Bag Small PE Bag Dimensions - 230*130mm Weight - 127g

50pcs TG.30.8111W per Large PE Bag Large PE Bag Dimensions - 395*338mm Weight - 6.35Kg

200pcs TG.30.8111W per carton Carton Dimensions - 315*380*290mm Weight - 6.5Kg

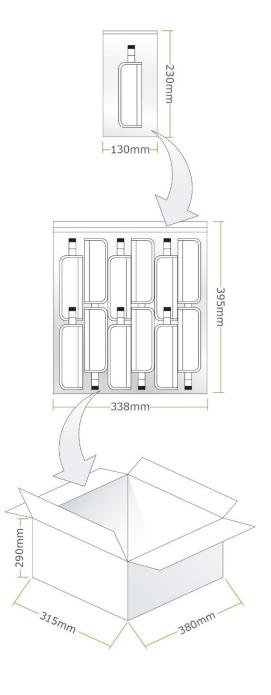



Changelog for the datasheet

SPE-12-8-119 - TG.30.0111W

Revision: I (Current Version)		
Date:	2023-01-18	
Changes:	Adding band 40 to spec table (full datasheet update).	
Changes Made by:	Gary West	

Previous Revisions

Revision: H		
Date:	2022-09-26	
Changes:	Updated specifications	
Changes Made by:	Cesar Sousa	

Revision: C			
Date:	2017-01-13		
Changes:			
Changes Made by:	Technical Writer		

Revision: G				
Date:	2022-05-17			
Changes:	Full datasheet template update and show data 600-6000.			
Changes Made by:	Gary West			

Revision: B				
Date:	2012-10-02			
Changes:				
Changes Made by:	Technical Writer			

Revision: F		
Date:	2018-11-30	
Changes:	Removed IP rating	
Changes Made by:	Jack Conroy	

Revision: A (Original First Release)			
Date:	2012-09-19		
Notes:			
Author:	Technical Writer		

Revision: E	
Date:	Unknown
Changes:	
Changes Made by:	Technical Writer

Revision: D	
Date:	2017-03-30
Changes:	Updated Spec with LTE table
Changes Made by:	Andy Mahoney





www.taoglas.com

