

Important notice

Dear Customer,

On 7 February 2017 the former NXP Standard Product business became a new company with the tradename **Nexperia**. Nexperia is an industry leading supplier of Discrete, Logic and PowerMOS semiconductors with its focus on the automotive, industrial, computing, consumer and wearable application markets

In data sheets and application notes which still contain NXP or Philips Semiconductors references, use the references to Nexperia, as shown below.

Instead of <http://www.nxp.com>, <http://www.philips.com/> or <http://www.semiconductors.philips.com/>, use <http://www.nexperia.com>

Instead of sales.addresses@www.nxp.com or sales.addresses@www.semiconductors.philips.com, use salesaddresses@nexperia.com (email)

Replace the copyright notice at the bottom of each page or elsewhere in the document, depending on the version, as shown below:

- © NXP N.V. (year). All rights reserved or © Koninklijke Philips Electronics N.V. (year). All rights reserved

Should be replaced with:

- © **Nexperia B.V. (year). All rights reserved.**

If you have any questions related to the data sheet, please contact our nearest sales office via e-mail or telephone (details via salesaddresses@nexperia.com). Thank you for your cooperation and understanding,

Kind regards,

Team Nexperia



PMFPB6532UP

20 V, 3.5 A / 320 mV V_F P-channel MOSFET-Schottky combination

Rev. 2 — 1 June 2012

Product data sheet

1. Product profile

1.1 General description

Small-signal P-channel enhancement mode Field-Effect Transistor (FET) using Trench MOSFET technology and ultra low V_F Maximum Efficiency General Application (MEGA) Schottky diode combined in a small and leadless ultra thin DFN2020-6 (SOT1118) Surface-Mounted Device (SMD) plastic package.

1.2 Features and benefits

- Trench MOSFET technology
- Integrated ultra low V_F MEGA Schottky diode
- 1 kV ElectroStatic Discharge (ESD) protection
- Small and leadless ultra thin SMD plastic package: $2 \times 2 \times 0.65$ mm
- Exposed drain pad for excellent thermal conduction

1.3 Applications

- Charging switch for portable devices
- DC-to-DC converters
- Power management in battery-driven portables
- Hard disk and computing power management

1.4 Quick reference data

Table 1. Quick reference data

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
MOSFET transistor						
V_{DS}	drain-source voltage	$T_{amb} = 25\text{ °C}$	-	-	-20	V
V_{GS}	gate-source voltage	$T_{amb} = 25\text{ °C}$	-	-	± 8	V
I_D	drain current	$T_{amb} = 25\text{ °C};$ $V_{GS} = -4.5\text{ V}$	[1] -	-	-3.5	A
$R_{DS(on)}$	drain-source on-state resistance	$T_j = 25\text{ °C};$ $V_{GS} = -4.5\text{ V};$ $I_D = -1\text{ A}$	[2] -	58	70	m Ω



Table 1. Quick reference data ...continued



Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Schottky diode						
I_F	forward current	$T_{sp} \leq 133\text{ °C}$	-	-	2	A
V_R	reverse voltage	$T_{amb} = 25\text{ °C}$	-	-	20	V
V_F	forward voltage	$T_{amb} = 25\text{ °C};$ $I_F = 1\text{ A}$	-	320	365	mV

[1] Device mounted on an FR4 Printed-Circuit Board (PCB), single-sided copper, tin-plated, mounting pad for drain 6 cm².

[2] Pulse test: $t_p \leq 300\text{ }\mu\text{s}; \delta \leq 0.01$.

2. Pinning information

Table 2. Pinning

Pin	Symbol	Description	Simplified outline	Graphic symbol
1	A	anode	 <p>Transparent top view</p>	
2	n.c.	not connected		
3	D	drain		
4	S	source		
5	G	gate		
6	K	cathode		
7	K	cathode		
8	D	drain		

017aaa600

3. Ordering information

Table 3. Ordering information

Type number	Package		
	Name	Description	Version
PMFPB6532UP	DFN2020-6	plastic thermal enhanced ultra thin small outline package; no leads; 6 terminals; body 2 × 2 × 0.65 mm	SOT1118

4. Marking

Table 4. Marking codes

Type number	Marking code
PMFPB6532UP	1B

5. Limiting values

Table 5. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions	Min	Max	Unit
MOSFET transistor					
V_{DS}	drain-source voltage	$T_{amb} = 25\text{ °C}$	-	-20	V
V_{GS}	gate-source voltage	$T_{amb} = 25\text{ °C}$	-	±8	V
I_D	drain current	$V_{GS} = -4.5\text{ V}$	[1]		
		$T_{amb} = 25\text{ °C}$	-	-3.5	A
		$T_{amb} = 100\text{ °C}$	-	-2.7	A
I_{DM}	peak drain current	$T_{amb} = 25\text{ °C}$; single pulse; $t_p \leq 10\text{ }\mu\text{s}$	-	-20	A
P_{tot}	total power dissipation	$T_{amb} = 25\text{ °C}$	[2]	520	mW
			[1]	1.25	W
		$T_{sp} = 25\text{ °C}$	-	8.3	W
Source-drain diode					
I_S	source current	$T_{amb} = 25\text{ °C}$	[1]	-1.4	A
ESD maximum rating					
V_{ESD}	electrostatic discharge voltage	human body model; $C = 100\text{ pF}$; $R = 1.5\text{ k}\Omega$	[3]	1000	V
Schottky diode					
V_R	reverse voltage	$T_{amb} = 25\text{ °C}$	-	20	V
I_F	forward current	$T_{sp} \leq 133\text{ °C}$	-	2	A
I_{FRM}	repetitive peak forward current	$t_p \leq 1\text{ ms}$; $\delta \leq 0.25$; $T_{amb} = 25\text{ °C}$	-	7	A
I_{FSM}	non-repetitive peak forward current	$t_p = 8\text{ ms}$; square wave	[4]	18	A
		$t_p = 8\text{ ms}$; half-sine wave	[5]	25	A
P_{tot}	total power dissipation	$T_{amb} = 25\text{ °C}$	[2]	480	mW
			[1]	1190	mW
		$T_{sp} = 25\text{ °C}$	-	8.3	W
Per device					
T_j	junction temperature		-	150	°C
T_{amb}	ambient temperature		-55	+150	°C
T_{stg}	storage temperature		-65	+150	°C


[1] Device mounted on an FR4 PCB, single-sided copper, tin-plated, mounting pad for drain 6 cm².

[2] Device mounted on an FR4 PCB, single-sided copper, tin-plated and standard footprint.

[3] Measured between all pins.


[4] $T_j = 25\text{ °C}$ prior to surge.

[5] Calculated from square-wave measurements; $T_j = 25\text{ °C}$ prior to surge.

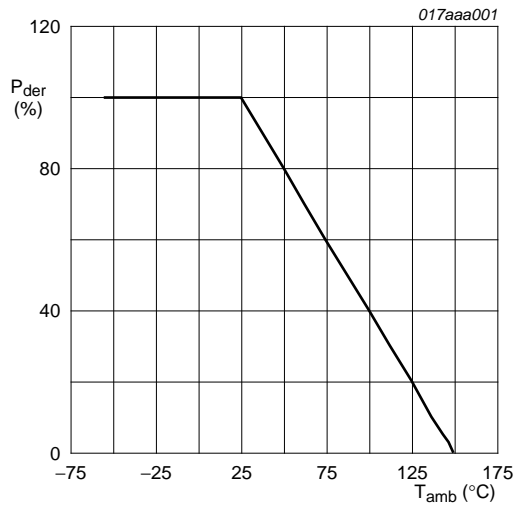


$$P_{der} = \frac{P_{tot}}{P_{tot(25^\circ C)}} \times 100 \%$$

Fig 1. MOSFET transistor: Normalized total power dissipation as a function of ambient temperature

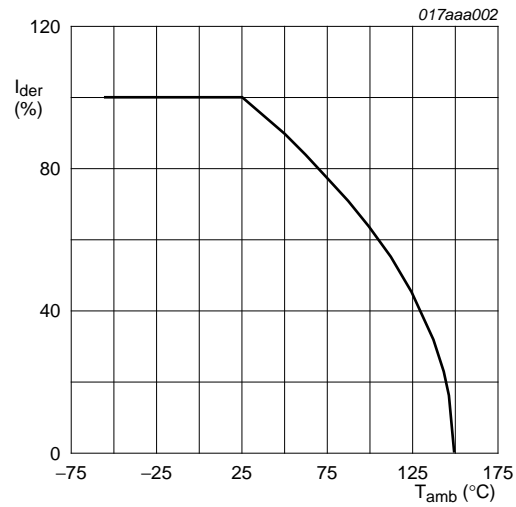

$$I_{der} = \frac{I_D}{I_{D(25^\circ C)}} \times 100 \%$$

Fig 2. MOSFET transistor: Normalized continuous drain current as a function of ambient temperature

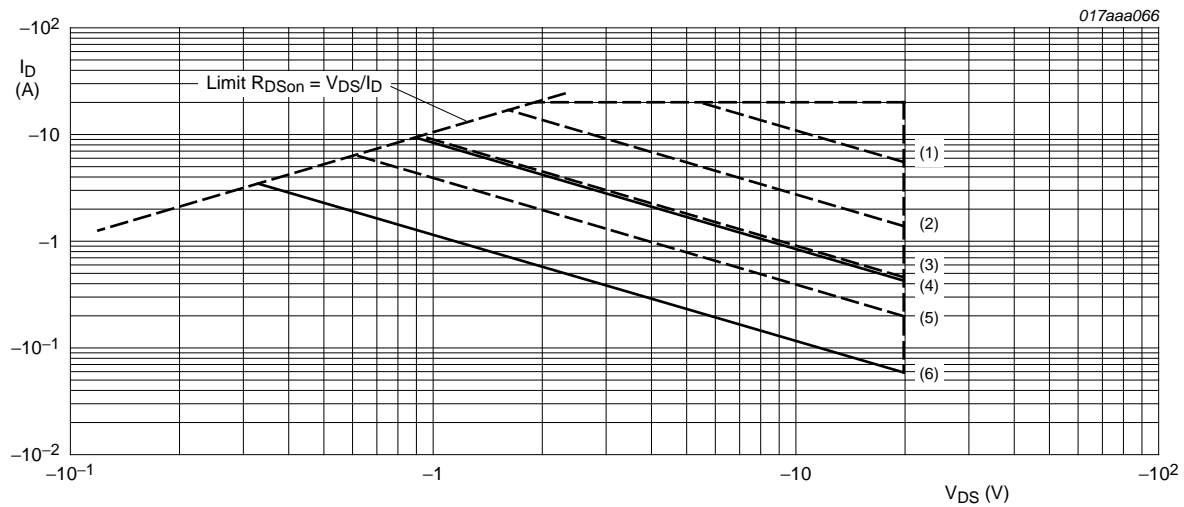

- I_{DM} = single pulse
- (1) $t_p = 100 \mu s$
 - (2) $t_p = 1 ms$
 - (3) $t_p = 10 ms$
 - (4) DC; $T_{sp} = 25^\circ C$
 - (5) $t_p = 100 ms$
 - (6) DC; $T_{amb} = 25^\circ C$; drain mounting pad $6 cm^2$

Fig 3. MOSFET transistor: Safe operating area; junction to ambient; continuous and peak drain currents as a function of drain-source voltage


6. Thermal characteristics


Table 6. Thermal characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
MOSFET transistor						
$R_{th(j-a)}$	thermal resistance from junction to ambient	in free air	[1]	-	240	K/W
			[2]	-	100	K/W
$R_{th(j-sp)}$	thermal resistance from junction to solder point		-	-	15	K/W
Schottky diode						
$R_{th(j-a)}$	thermal resistance from junction to ambient	in free air	[1]	-	260	K/W
			[2]	-	105	K/W
$R_{th(j-sp)}$	thermal resistance from junction to solder point		-	-	15	K/W

[1] Device mounted on an FR4 PCB, single-sided copper, tin-plated and standard footprint.


[2] Device mounted on an FR4 PCB, single-sided copper, tin-plated, mounting pad for drain 6 cm².

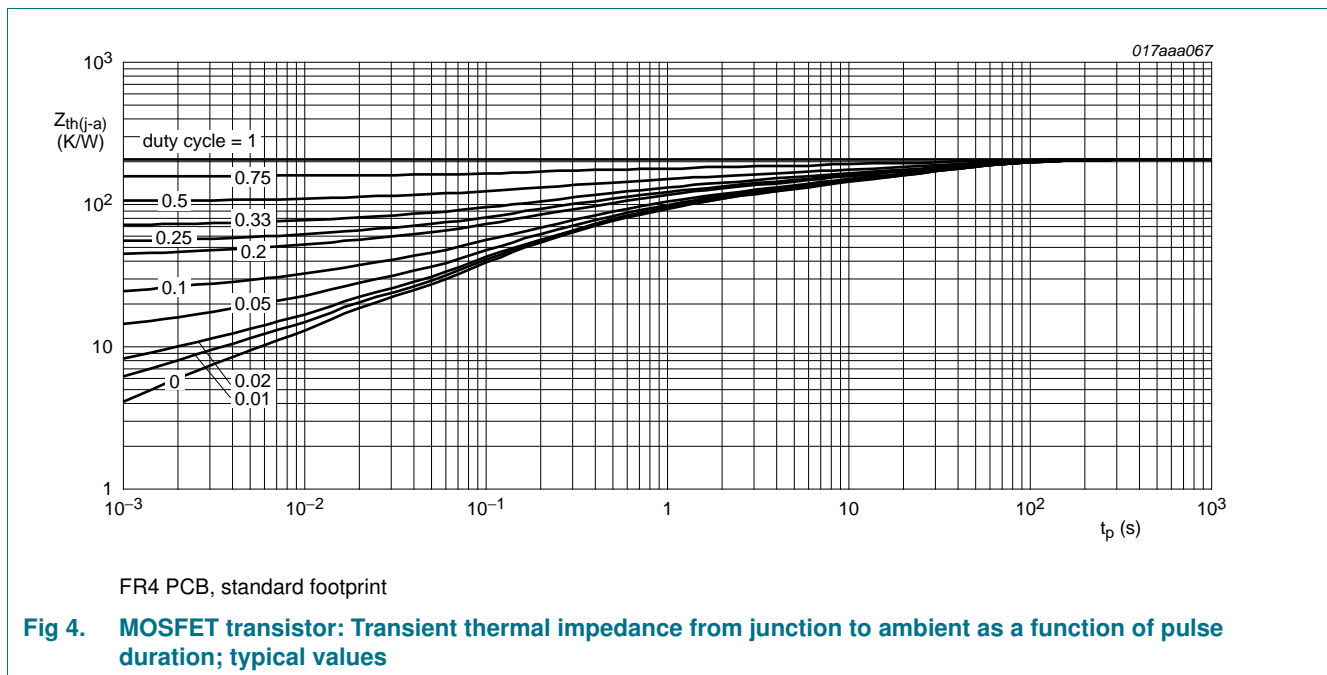

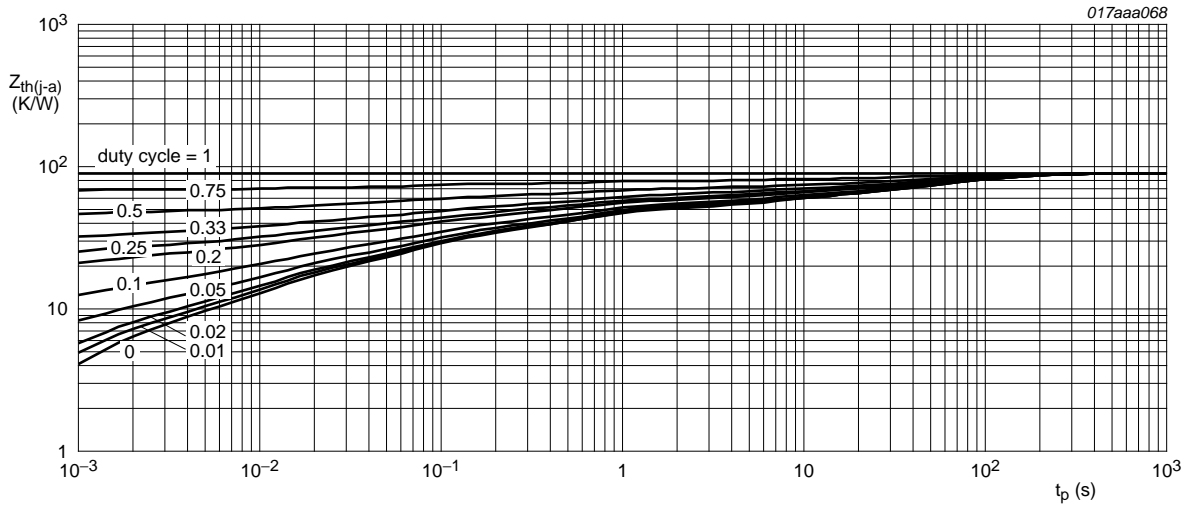


FR4 PCB, mounting pad for drain 6 cm²

Fig 5. MOSFET transistor: Transient thermal impedance from junction to ambient as a function of pulse duration; typical values

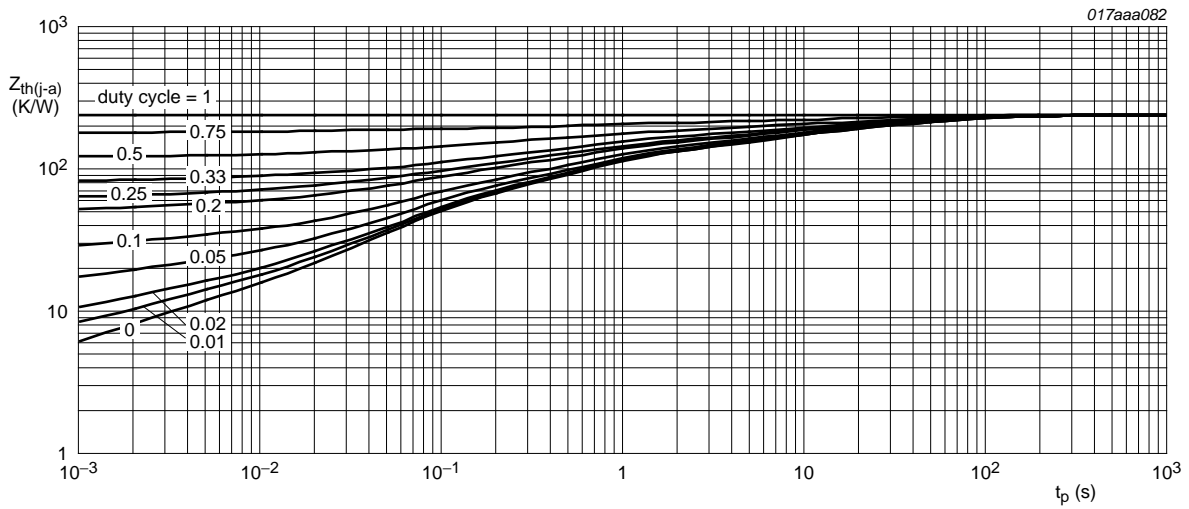

FR4 PCB, standard footprint

Fig 6. Schottky diode: Transient thermal impedance from junction to ambient as a function of pulse duration; typical values

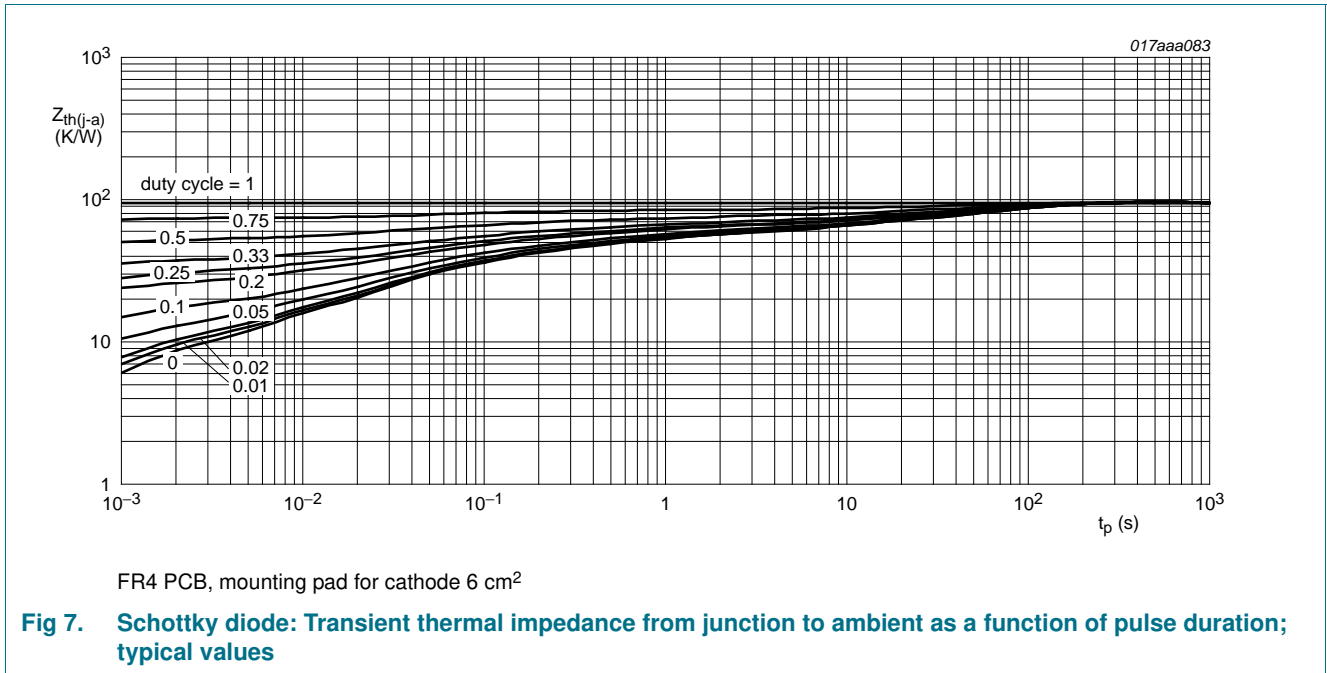

7. Characteristics

Table 7. Characteristics
T_j = 25 °C unless otherwise specified.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
MOSFET transistor						
<i>Static characteristics</i>						
V _{(BR)DSS}	drain-source breakdown voltage	I _D = -250 μA; V _{GS} = 0 V	-20	-	-	V
V _{GS(th)}	gate-source threshold voltage	I _D = -250 μA; V _{DS} = V _{GS}	-0.4	-0.7	-1	V
I _{DSS}	drain leakage current	V _{DS} = -16 V; V _{GS} = 0 V				
		T _j = 25 °C	-	-	-1	μA
		T _j = 150 °C	-	-	-10	μA
I _{GSS}	gate leakage current	V _{GS} = ±8 V; V _{DS} = 0 V	-	1	±10	μA
R _{DSon}	drain-source on-state resistance		[1]			
		V _{GS} = -4.5 V; I _D = -1 A	-	58	70	mΩ
		V _{GS} = -4.5 V; I _D = -1 A; T _j = 150 °C	-	80	100	mΩ
		V _{GS} = -2.5 V; I _D = -1 A	-	72	90	mΩ
		V _{GS} = -1.8 V; I _D = -0.5 A	-	100	165	mΩ
g _{fs}	forward transconductance	V _{DS} = -5 V; I _D = -1 A	[1]	-	8	S

Table 7. Characteristics ...continued
 $T_j = 25\text{ °C}$ unless otherwise specified.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Dynamic characteristics						
$Q_{G(\text{tot})}$	total gate charge	$I_D = -3.3\text{ A}$;	-	4.5	6	nC
Q_{GS}	gate-source charge	$V_{DS} = -10\text{ V}$;	-	0.8	-	nC
Q_{GD}	gate-drain charge	$V_{GS} = -4.5\text{ V}$	-	1	-	nC
C_{iss}	input capacitance	$V_{GS} = 0\text{ V}$; $V_{DS} = -10\text{ V}$;	-	380	-	pF
C_{oss}	output capacitance	$f = 1\text{ MHz}$	-	72	-	pF
C_{rss}	reverse transfer capacitance		-	61	-	pF
$t_{d(\text{on})}$	turn-on delay time	$V_{DS} = -15\text{ V}$; $R_L = 15\text{ }\Omega$;	-	5	-	ns
t_r	rise time	$V_{GS} = -10\text{ V}$; $R_G = 6\text{ }\Omega$	-	10	-	ns
$t_{d(\text{off})}$	turn-off delay time		-	57	-	ns
t_f	fall time		-	35	-	ns
Source-drain diode						
V_{SD}	source-drain voltage	$I_S = -1.3\text{ A}$; $V_{GS} = 0\text{ V}$	-	-0.75	-1	V
Schottky diode						
V_F	forward voltage	$I_F = 100\text{ mA}$	-	225	275	mV
		$I_F = 500\text{ mA}$	-	285	335	mV
		$I_F = 1\text{ A}$	-	320	365	mV
I_R	reverse current	$V_R = 5\text{ V}$	-	65	220	μA
		$V_R = 5\text{ V}$; $T_j = 125\text{ °C}$	-	13	50	mA
		$V_R = 10\text{ V}$	-	110	400	μA
		$V_R = 20\text{ V}$	-	230	700	μA
C_d	diode capacitance	$V_R = 5\text{ V}$; $f = 1\text{ MHz}$	-	60	70	pF

[1] Pulse test: $t_p \leq 300\text{ }\mu\text{s}$; $\delta \leq 0.01$.

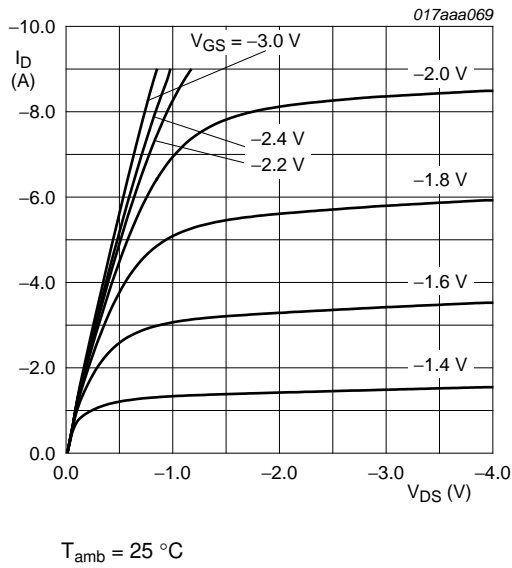


Fig 8. MOSFET transistor: Output characteristics: drain current as a function of drain-source voltage; typical values



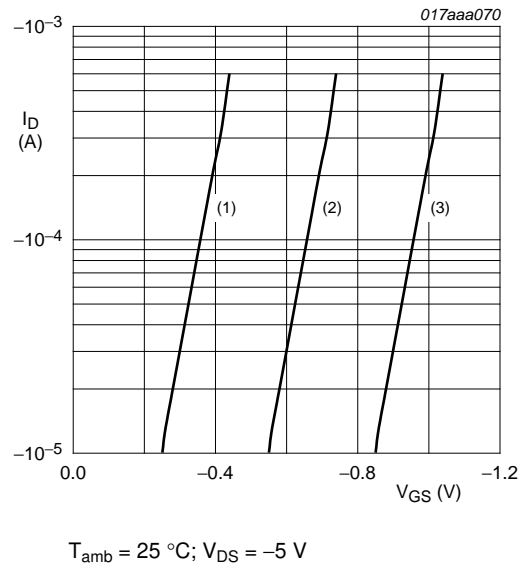


Fig 9. MOSFET transistor: Sub-threshold drain current as a function of gate-source voltage

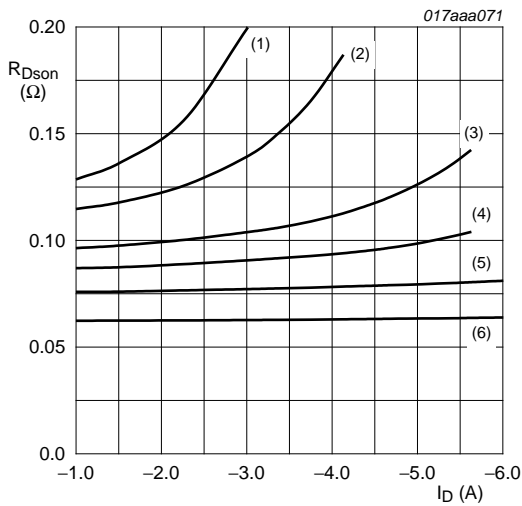


- $T_{amb} = 25\text{ }^\circ\text{C}$
- (1) $V_{GS} = -1.5\text{ V}$
 - (2) $V_{GS} = -1.6\text{ V}$
 - (3) $V_{GS} = -1.8\text{ V}$
 - (4) $V_{GS} = -2\text{ V}$
 - (5) $V_{GS} = -2.5\text{ V}$
 - (6) $V_{GS} = -4.5\text{ V}$

Fig 10. MOSFET transistor: Drain-source on-state resistance as a function of drain current; typical values

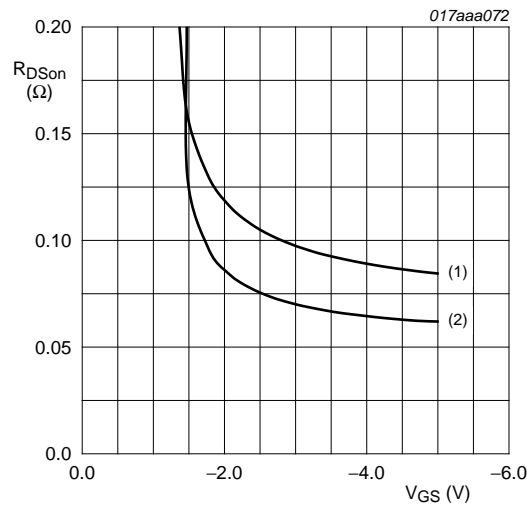


- $I_D = -1\text{ A}$
- (1) $T_{amb} = 150\text{ }^\circ\text{C}$
 - (2) $T_{amb} = 25\text{ }^\circ\text{C}$

Fig 11. MOSFET transistor: Drain-source on-state resistance as a function of gate-source voltage; typical values

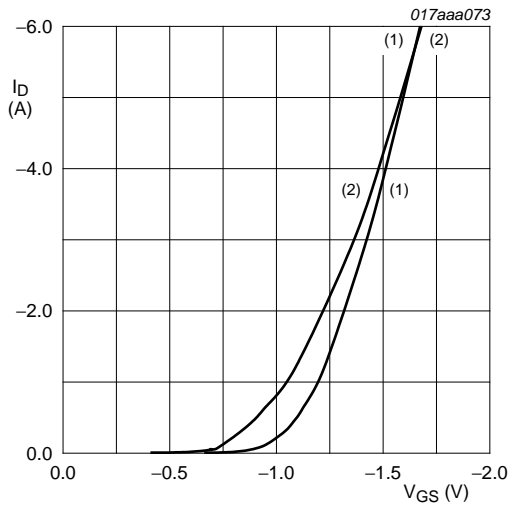


$V_{DS} > I_D \times R_{DSon}$
 (1) $T_{amb} = 25\text{ °C}$
 (2) $T_{amb} = 150\text{ °C}$

Fig 12. MOSFET transistor: Transfer characteristics: drain current as a function of gate-source voltage; typical values

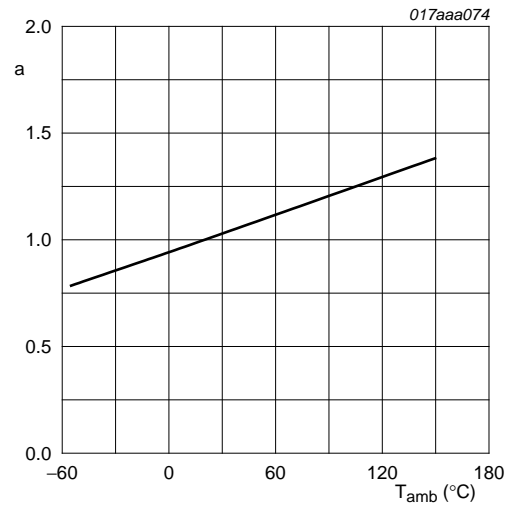


$$a = \frac{R_{DSon}}{R_{DSon(25^{\circ}C)}}$$

Fig 13. MOSFET transistor: Normalized drain-source on-state resistance as a function of ambient temperature; typical values

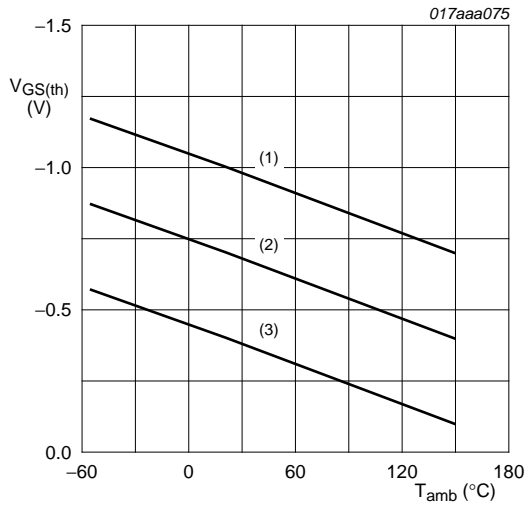


$I_D = -0.25\text{ mA}; V_{DS} = V_{GS}$
 (1) maximum values
 (2) typical values
 (3) minimum values

Fig 14. MOSFET transistor: Gate-source threshold voltage as a function of ambient temperature

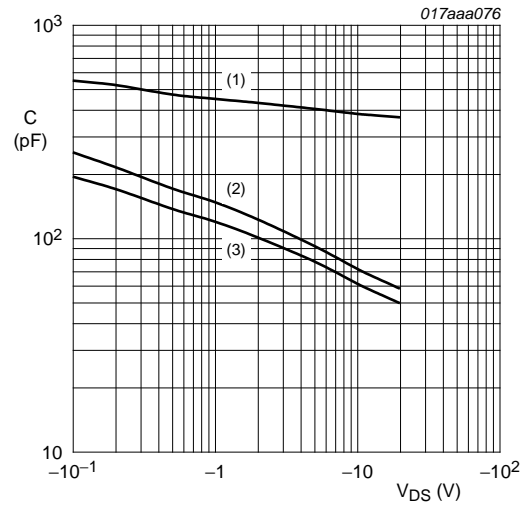

$f = 1\text{ MHz}; V_{GS} = 0\text{ V}$
 (1) C_{iss}
 (2) C_{oss}
 (3) C_{rss}

Fig 15. MOSFET transistor: Input, output and reverse transfer capacitances as a function of drain-source voltage; typical values

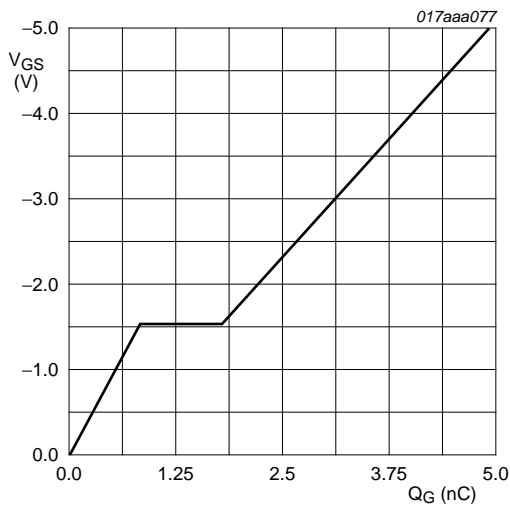

$I_D = -3.3 \text{ A}; V_{DS} = -10 \text{ V}; T_{amb} = 25 \text{ }^\circ\text{C}$

Fig 16. MOSFET transistor: Gate-source voltage as a function of gate charge; typical values


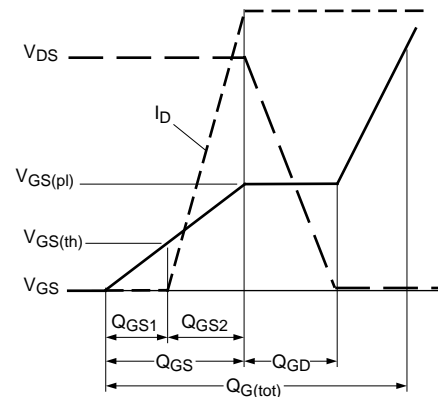



Fig 17. MOSFET transistor: Gate charge waveform definitions

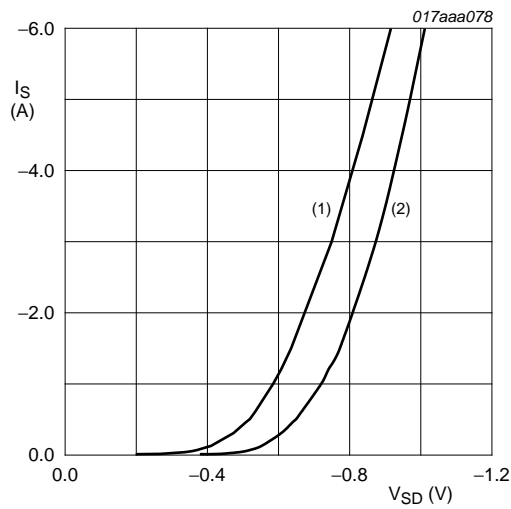

$V_{GS} = 0 \text{ V}$


- (1) $T_{amb} = 150 \text{ }^\circ\text{C}$
- (2) $T_{amb} = 25 \text{ }^\circ\text{C}$

Fig 18. MOSFET transistor: Source current as a function of source-drain voltage; typical values

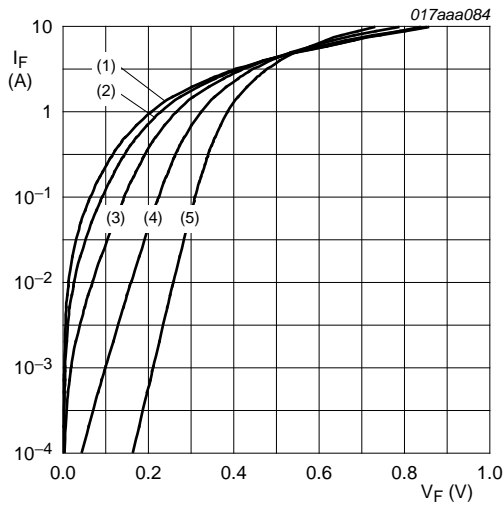


- (1) $T_j = 150\text{ }^\circ\text{C}$
- (2) $T_j = 125\text{ }^\circ\text{C}$
- (3) $T_j = 85\text{ }^\circ\text{C}$
- (4) $T_j = 25\text{ }^\circ\text{C}$
- (5) $T_j = -40\text{ }^\circ\text{C}$

Fig 19. Schottky diode: Forward current as a function of forward voltage; typical values

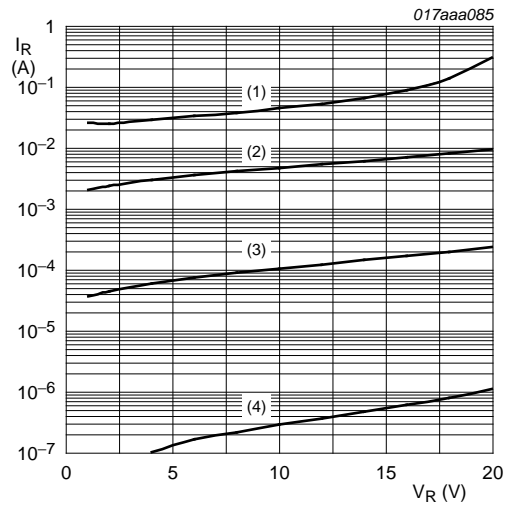


- (1) $T_j = 125\text{ }^\circ\text{C}$
- (2) $T_j = 85\text{ }^\circ\text{C}$
- (3) $T_j = 25\text{ }^\circ\text{C}$
- (4) $T_j = -40\text{ }^\circ\text{C}$

Fig 20. Schottky diode: Reverse current as a function of reverse voltage; typical values

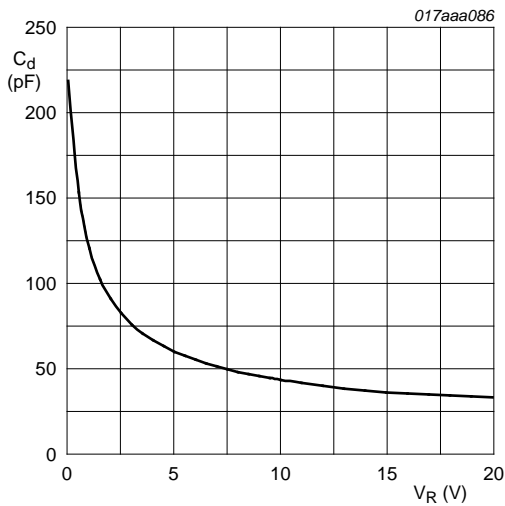

$f = 1\text{ MHz}; T_{amb} = 25\text{ }^\circ\text{C}$

Fig 21. Schottky diode: Diode capacitance as a function of reverse voltage; typical values

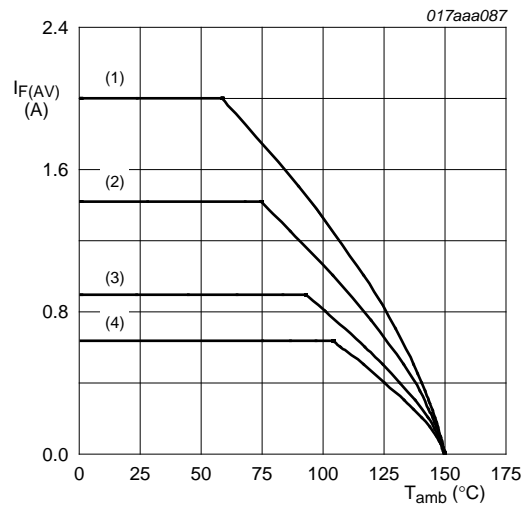

FR4 PCB, mounting pad for cathode 6 cm^2

$T_j = 150\text{ }^\circ\text{C}$

- (1) $\delta = 1; \text{DC}$
- (2) $\delta = 0.5; f = 20\text{ kHz}$
- (3) $\delta = 0.2; f = 20\text{ kHz}$
- (4) $\delta = 0.1; f = 20\text{ kHz}$

Fig 22. Schottky diode: Average forward current as a function of ambient temperature; typical values

8. Test information

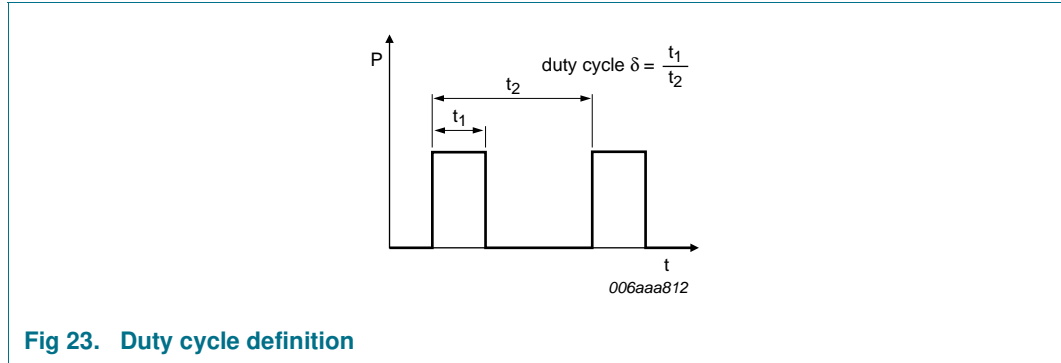


Fig 23. Duty cycle definition

9. Package outline

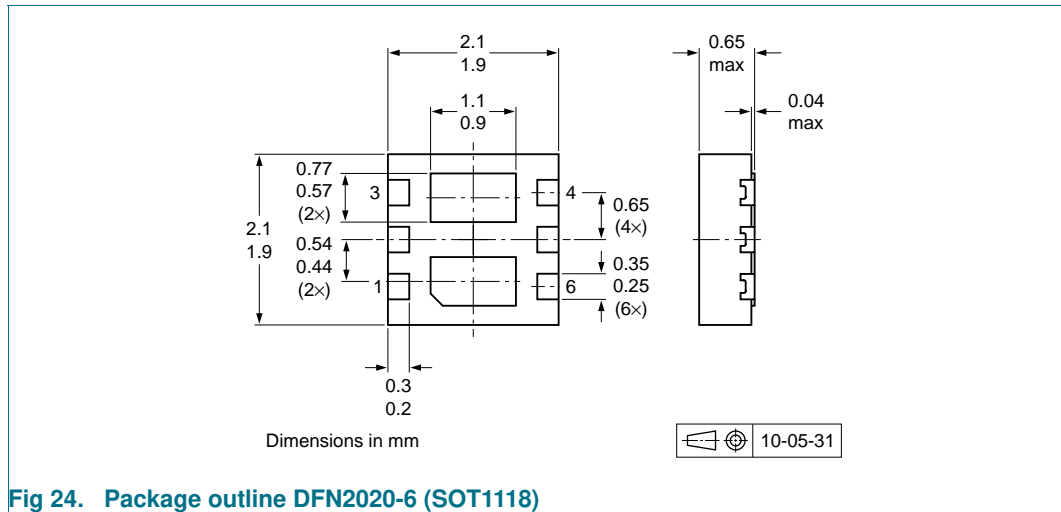


Fig 24. Package outline DFN2020-6 (SOT1118)

10. Soldering

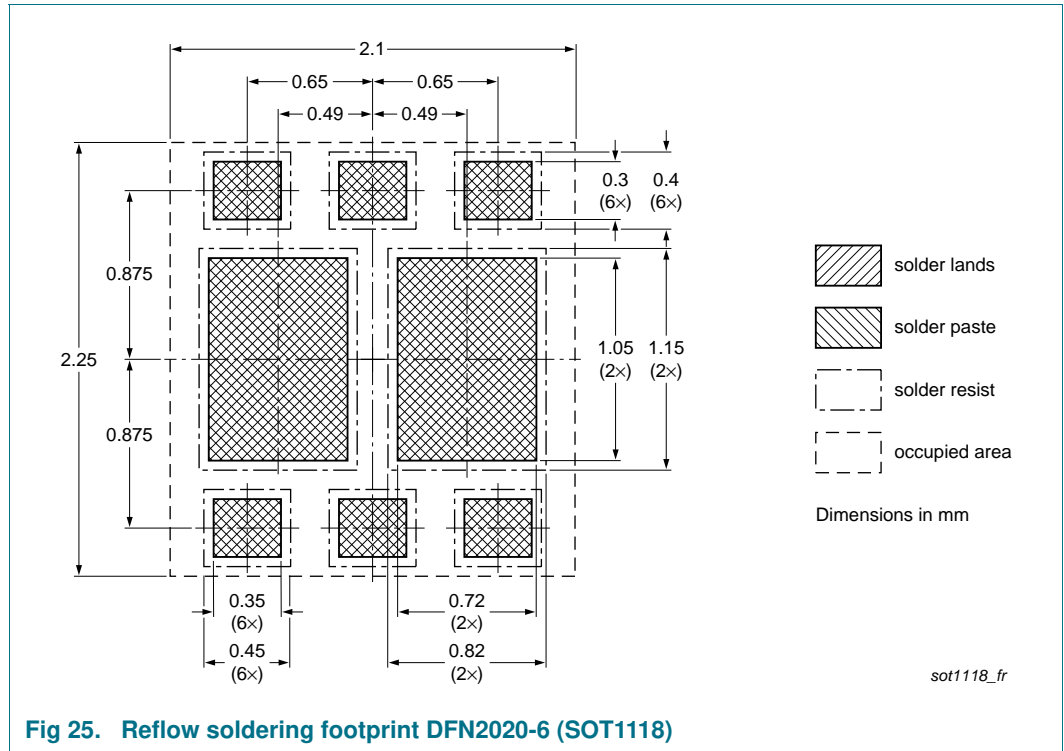


Fig 25. Reflow soldering footprint DFN2020-6 (SOT1118)

11. Revision history

Table 8. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
PMFPB6532UP v.2	20120601	Product data sheet	-	PMFPB6532UP v.1
Modifications:		<ul style="list-style-type: none">• Section 1.1 “General description”: updated• Table 2 “Pinning”: graphic symbol drawing updated• Figure 24: replaced with minimized package outline drawing		
PMFPB6532UP v.1	20110309	Product data sheet	-	-

12. Legal information

12.1 Data sheet status

Document status ^{[1][2]}	Product status ^[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <http://www.nxp.com>.

12.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between NXP Semiconductors and its customer, unless NXP Semiconductors and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the NXP Semiconductors product is deemed to offer functions and qualities beyond those described in the Product data sheet.

12.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of NXP Semiconductors.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nxp.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Quick reference data — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

Non-automotive qualified products — Unless this data sheet expressly states that this specific NXP Semiconductors product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. NXP Semiconductors accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without NXP Semiconductors' warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond NXP Semiconductors' specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies NXP Semiconductors for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond NXP Semiconductors' standard warranty and NXP Semiconductors' product specifications.

12.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

13. Contact information

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: salesaddresses@nxp.com

14. Contents

1	Product profile	1
1.1	General description	1
1.2	Features and benefits	1
1.3	Applications	1
1.4	Quick reference data	1
2	Pinning information	2
3	Ordering information	2
4	Marking	2
5	Limiting values	3
6	Thermal characteristics	5
7	Characteristics	7
8	Test information	13
9	Package outline	13
10	Soldering	14
11	Revision history	15
12	Legal information	16
12.1	Data sheet status	16
12.2	Definitions	16
12.3	Disclaimers	16
12.4	Trademarks	17
13	Contact information	17
14	Contents	18

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

© NXP B.V. 2012.

All rights reserved.

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: salesaddresses@nxp.com

Date of release: 1 June 2012

Document identifier: PMFPB6532UP