

1

2

3

4


5

6


7

A

2000±50



Cable BLACK print
 AWMM STYLE 2725 80°C 30V VW-1 28AWG/1P 24AWG/2C
 ---c AWMM /III A 80°C 30V FT1 USB 1.1 CABLE



A

B

B

C

C

D



D

E

E

F

F

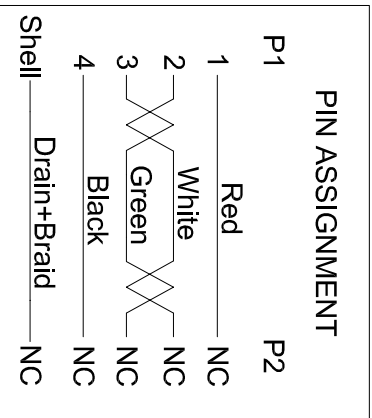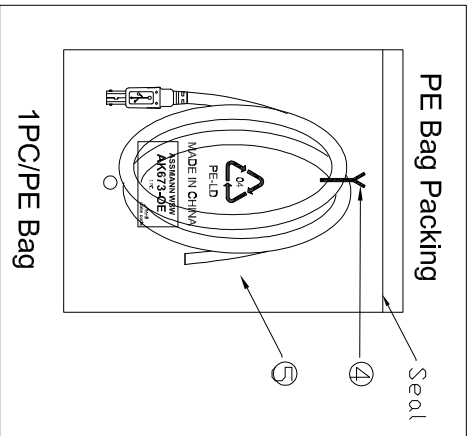

- Electrical test:
1. 100% short, open, miss wire test
 2. Conduct resistance: 2 Ohm max.
 3. Insulator resistance: 5Mohm min.
 4. Dielectric test: DC 300V

RoHS compliant
 Unit: mm

⑤	PE Bag	1	Clear Print black "MADE IN CHINA"+ "1PC"
④	TIE	1	White
③	Out Jacket	NA	Beige(BG002) PVC-45P
②	Cable	1	USB1.1 UL2725 28#/1P+24#/2C+AEB OD:4.7mm Beige(BG002)
①	CONN	1	USB B Male Shell:Nickel Pin:G/F Insulator color: White

NO.	NAME:	QTY	SPECIFICATION	
			Customer-No.	
			ASSMANN WSW-No.	AK673-OE

Scale	Free		Date	Name
TOLERANCE			Drawn	01.07.2016
			Approved	01.07.2016

DIM	TOL			
Angle	TOL			

H

H

1

2

3

4

5

6

7

H



Customer-No. ASSMANN WSW-No. AK673-OE
 Drawing-No. ASS 7687 CA
 Replace rev00
 Sheet