



# 2467 MHz WiFi Cavity Bandpass Filter

## Part Number: WiFi2467-12



**ANATECH ELECTRONICS INC**  
RF & Microwave Filters & Products

### Electrical specifications

- Center Frequency:** 2467 MHz
- 1dB Bandwidth:** 22 MHz
- Insertion loss:** 3 dB max ( 2 dB typ)
- Return loss:** 15 dB min (18 dB typ)
- Ripple:** 1.2 dB max
- Rejection 1:** 60 dB min@Fo+/-25 MHz
- Rejection 2:** 90 dBc min@2\*Fo+/-22 MHz
- Power handling:** 50 Watts


### Mechanical

- Mounting Method:** Threaded Mounting Holes
- Connector Type:** N-Type Female
- Dimensions:** 4.25" x 2.20" x 1.02" in

### Environmental

- Operating Temperature:** -45 to +85° C
- Storage Temperature:** -55 to +95° C
- Shock:** 20 G. 11ms
- Vibration:** 20 G. 5 to 200 MHz

### Outline Drawing:

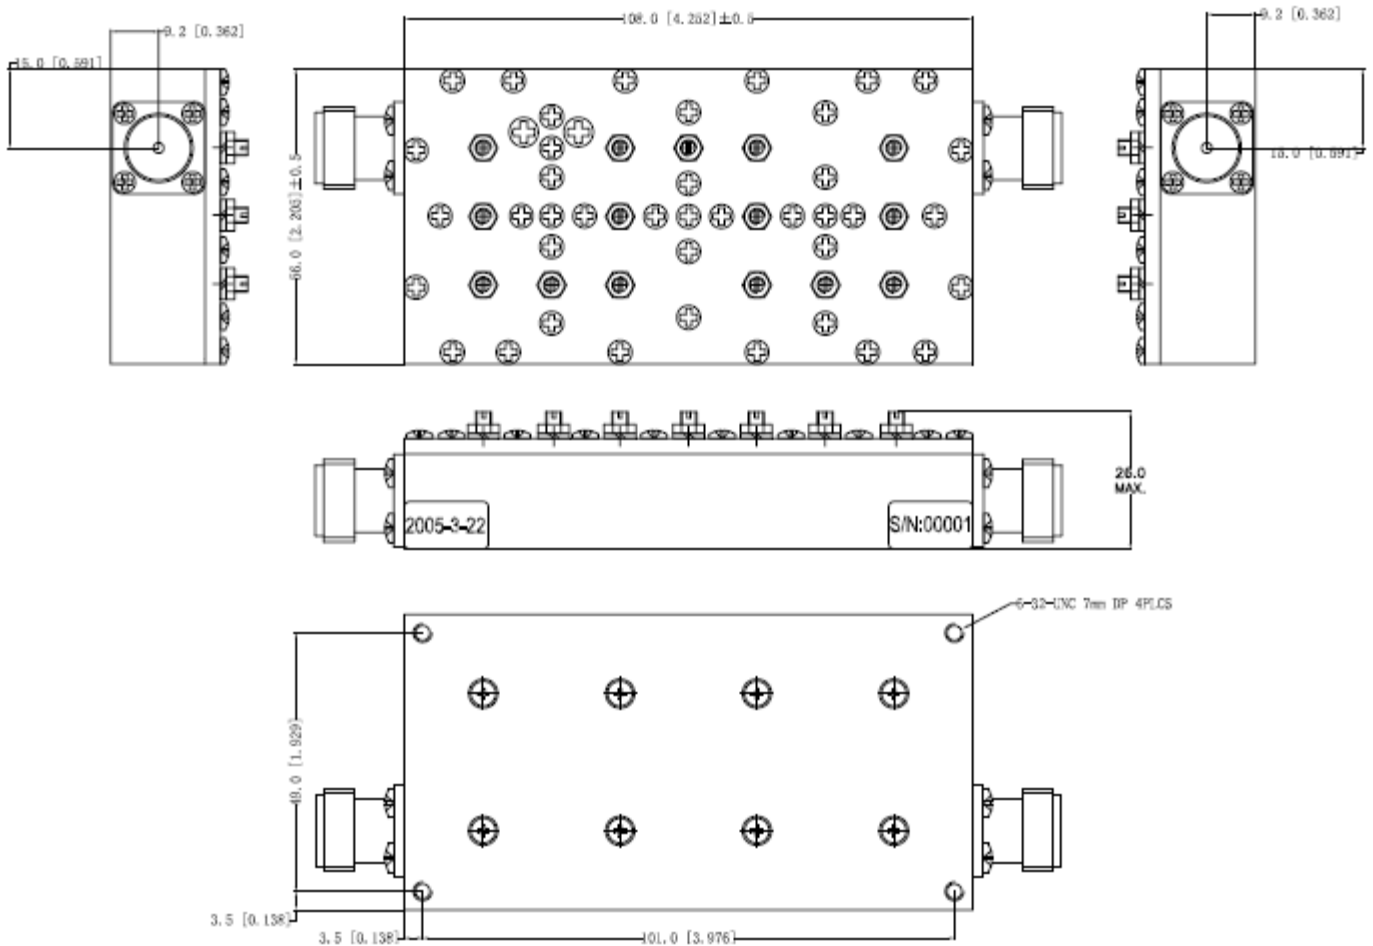



# 2467 MHz WiFi Cavity Bandpass Filter

Part Number: WiFi2467-12

**ANATECH ELECTRONICS INC**  
RF & Microwave Filters & Products



## Plots:

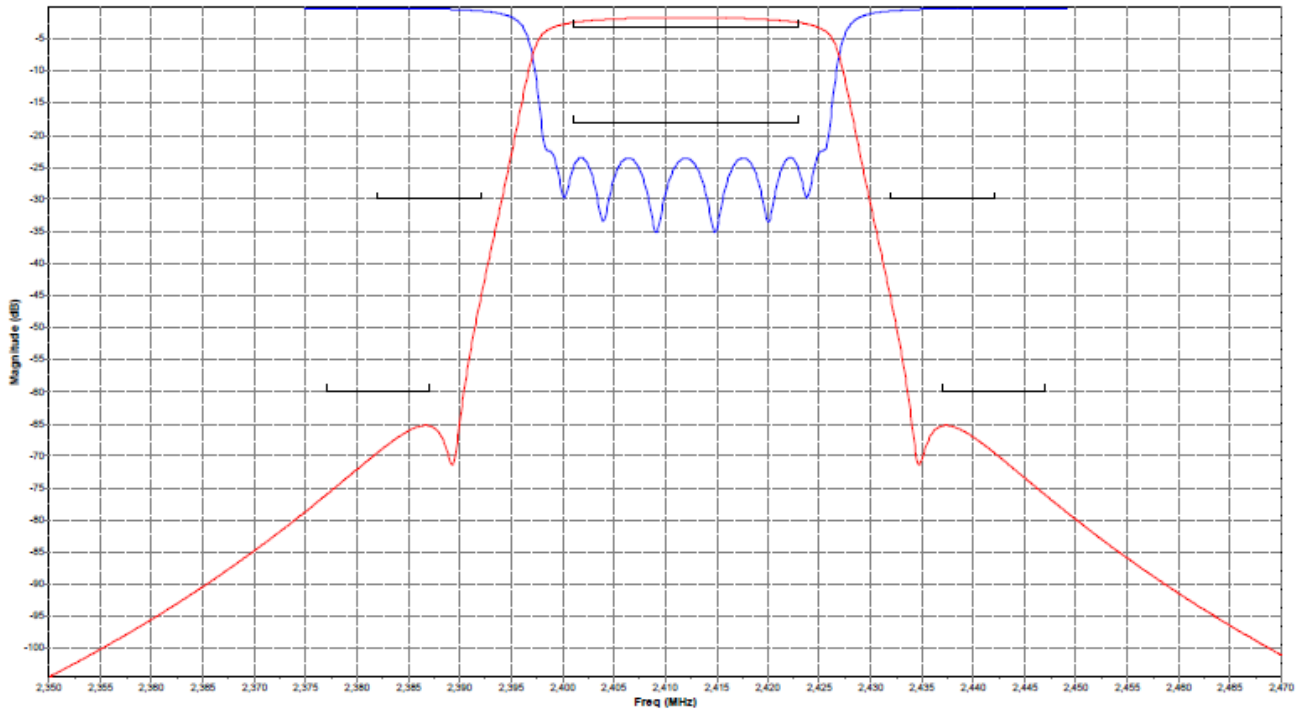


Fig.1 Return Loss and Rejection

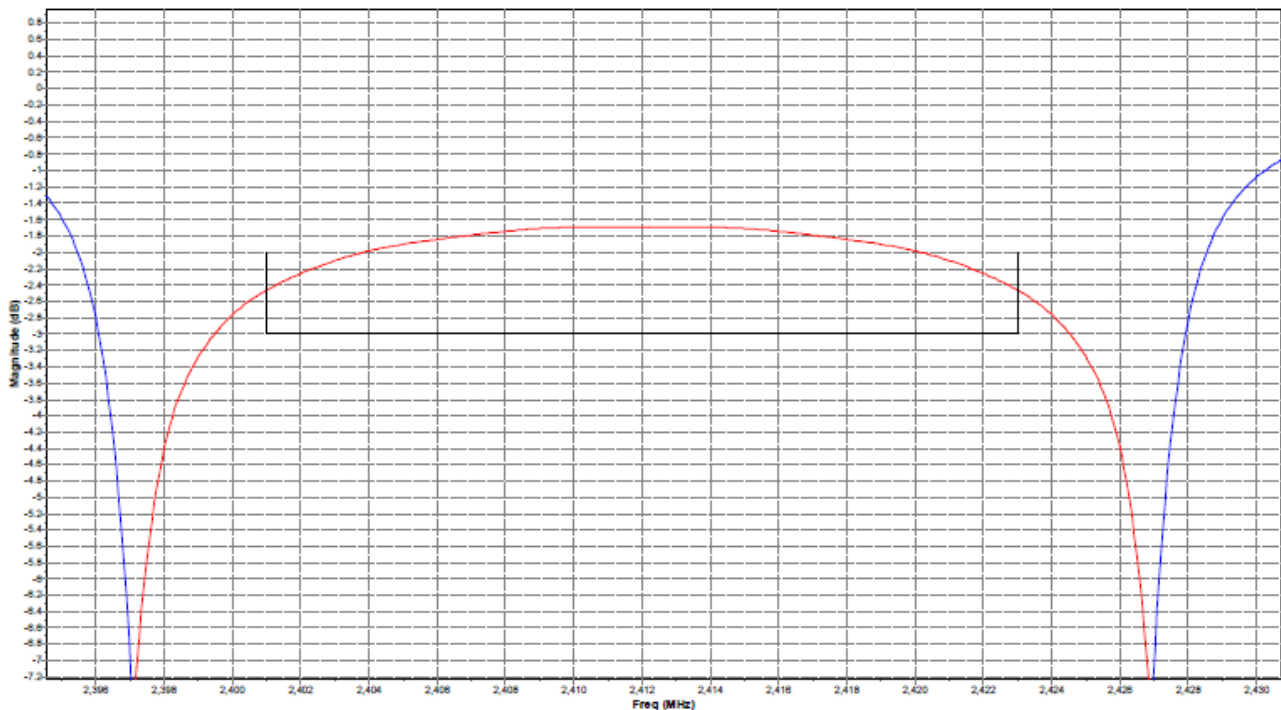


Fig.2 Insertion Loss and Ripple