

6

5


4

3



2

1


PART NUMBER	ENGINEERING NO.	LENGTH ± TOLERANCE
1300500394	ENS2335M010	3' 3" +2.19"/-0" [ 1M +55.6/-0 mm ]



MALE - FACE VIEW

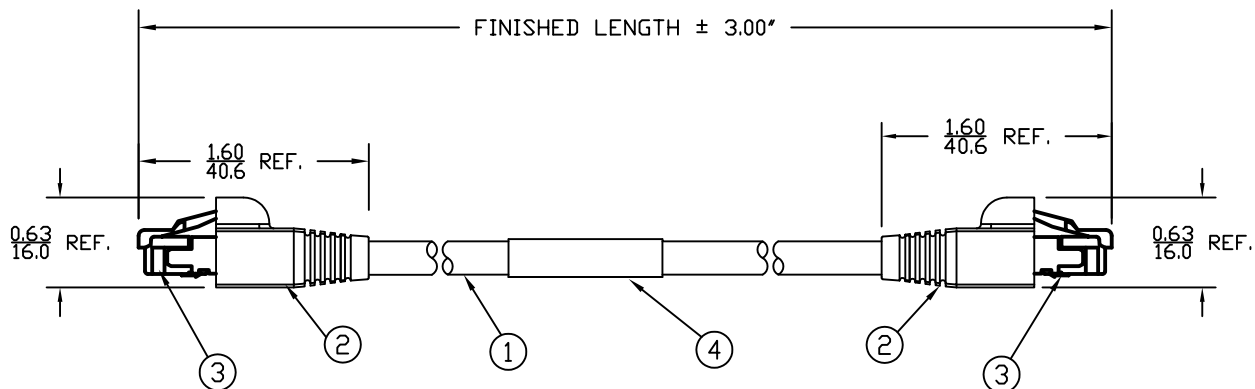

MALE - FACE VIEW



## NOTES:

- 1) MATERIAL: SEE TABLE
- 2) FINISHES: SEE TABLE
- 3) CABLE: #24/8 SHIELDED TWISTED PAIR, PUR
- 4) ELECTRICAL DATA:  
ACCORDING TO CAT5e ETHERNET STANDARD  
MAX. VOLTAGE: 30V  
MAX. CURRENT 1.5A
- 5) ENVIRONMENTAL:  
PROTECTION IP67  
TEMPERATURE RANGE: -20°C TO +80°C
- 6) WRAP LABEL IS MARKED WITH P/N & DATE CODE.
- 7) ASSEMBLY IS RoHS COMPLIANT.

## WIRE LIST

PIN	COLOR
1	WHITE/GREEN
2	GREEN
3	WHITE/ORANGE
4	BLUE
5	WHITE/BLUE
6	ORANGE
7	WHITE/BROWN
8	BROWN
GND	DRAIN WIRE

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
4	1	LABEL	PLASTIC FILM	BLACK/YELLOW
3	2	RJ45 PLUG	POLYCARBONATE	CLEAR
2	2	BOOT	PVC	BLACK
1	1	ETHERNET CABLE-CAT5E	PUR JACKET	BLACK

SD RELEASE EC NO: WNA2010-0442 DRWN: TVICKERS 2010/01/18 CHKD: BWOODMA APPR: DTTITUS 2010/01/19	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM	SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
			mm	INCH	DRAWN BY	DATE	TITLE	
		4 PLACES	±---	±---	---	---	ETHERNET MMJ RJ45/RJ45 568-A SHIELD ASSEMBLY PUR STRANDED CABLE	
		3 PLACES	±---	±0.005	---	---		
		2 PLACES	±0.13	±0.010	DTITUS	2010/01/19	MOLEX INCORPORATED	
		1 PLACE	±0.25	±0.020	APPROVED BY	DATE	DOCUMENT NO.	
		ANGULAR ±1/2°		MATERIAL NO.		SHEET NO.		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-130050-029		1 OF 1		
A		A		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

6

5

4

3

2

1