

TTC-6-1X2-24DC-UT - Surge protection device



2906798

<https://www.phoenixcontact.com/us/products/2906798>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Surge protection for a 2-wire floating signal circuit, e.g., 0(4) ... 20 mA current loop, HART-compatible.



Your advantages

- Space saving with a narrow overall width of just 6□mm
- Cost-optimized with tailored product features
- Easy selection for all possible demands in MCR applications with a complete product portfolio

Commercial data

| | |
|--------------------------------------|---------------------|
| Item number | 2906798 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | CL23 |
| Product key | CL2261 |
| Catalog page | Page 118 (C-4-2019) |
| GTIN | 4055626135533 |
| Weight per piece (including packing) | 38.6 g |
| Weight per piece (excluding packing) | 38.6 g |
| Customs tariff number | 85363010 |
| Country of origin | US |

TTC-6-1X2-24DC-UT - Surge protection device

2906798

<https://www.phoenixcontact.com/us/products/2906798>

Technical data

Product properties

| | |
|-------------------------|-------------------------------------|
| IEC test classification | C1 |
| | C2 |
| | C3 |
| | D1 |
| Type | DIN rail module, one-piece |
| Product type | Surge protection for MCR technology |
| Product family | TERMITRAB complete |
| Wire pairs per module | 1 |

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Pollution degree | 2 |


Electrical properties

| | |
|-----------------------|---------|
| Nominal voltage U_N | 24 V DC |
|-----------------------|---------|

Connection data

| | |
|----------------------------------|---|
| Connection method | Screw connection |
| Screw thread | M3 |
| Tightening torque | 0.5 Nm ... 0.6 Nm |
| Conductor cross section flexible | 0.2 mm ² ... 2.5 mm ² |
| Conductor cross section rigid | 0.2 mm ² ... 4 mm ² |
| Conductor cross section AWG | 24 ... 12 |

Dimensions

| | |
|---------------------|--|
| Dimensional drawing |  |
| Width | 6.2 mm +0.1 mm |
| Height | 105.8 mm |
| Depth | 69.5 mm (incl. DIN rail 7.5 mm) |

Material specifications

| | |
|--|-----|
| Flammability rating according to UL 94 | V-0 |
| Insulating material | PBT |
| Housing material | PBT |

Mechanical properties

TTC-6-1X2-24DC-UT - Surge protection device



2906798

<https://www.phoenixcontact.com/us/products/2906798>

Mechanical data

| | |
|-----------------|----|
| Open side panel | No |
|-----------------|----|

Protective circuit

| | |
|---|--|
| Direction of action | Line-Line & Line-Signal Ground/Shield & optional Signal Ground/Shield-Earth Ground |
| Maximum continuous voltage U_C | 30 V DC |
| | 21 V AC |
| Rated current | 600 mA (40 °C) |
| Operating effective current I_C at U_C | $\leq 5 \mu\text{A}$ |
| Residual current I_{PE} | $\leq 1 \mu\text{A}$ |
| Nominal discharge current I_n (8/20) μs (line-line) | 5 kA |
| Nominal discharge current I_n (8/20) μs (line-ground) | 5 kA |
| Pulse discharge current I_{imp} (10/350) μs (line-line) | 0.5 kA |
| Pulse discharge current I_{imp} (10/350) μs (line-earth) | 0.5 kA |
| Total discharge current I_{total} (8/20) μs | 10 kA |
| Voltage protection level U_p (line-line) | $\leq 55 \text{ V}$ (C1 - 1 kV / 500 A) |
| | $\leq 65 \text{ V}$ (C2 - 10 kV / 5 kA) |
| | $\leq 50 \text{ V}$ (C3 - 25 A) |
| | $\leq 55 \text{ V}$ (C3 - 100 A) |
| Voltage protection level U_p (line-earth) | $\leq 750 \text{ V}$ (C1 - 1 kV / 500 A) |
| | $\leq 750 \text{ V}$ (C2 - 10 kV / 5 kA) |
| | $\leq 700 \text{ V}$ (C3 - 25 A) |
| | $\leq 750 \text{ V}$ (C3 - 100 A) |
| Voltage protection level U_p static (line-line) | $\leq 50 \text{ V}$ (C1 - 1 kV / 500 A) |
| | $\leq 65 \text{ V}$ (C2 - 10 kV / 5 kA) |
| Voltage protection level U_p static (line-earth) | $\leq 750 \text{ V}$ (C1 - 1 kV / 500 A) |
| | $\leq 750 \text{ V}$ (C2 - 10 kV / 5 kA) |
| Response time t_A (line-line) | $\leq 1 \text{ ns}$ |
| Response time t_A (line-earth) | $\leq 100 \text{ ns}$ |
| Input attenuation aE, sym. | typ. 0.3 dB ($\leq 250 \text{ kHz}$ / 150 Ω) |
| | typ. 0.3 dB ($\leq 370 \text{ kHz}$ / 100 Ω) |
| Cut-off frequency f_g (3 dB), sym. in 100 Ω system | typ. 1310 kHz |
| Cut-off frequency f_g (3 dB), sym. in 150 Ω system | typ. 940 kHz |
| Capacity (Core-Core) | typ. 2.2 nF |
| Resistance per path | 1.65 Ω $\pm 20 \%$ |
| Surge protection fault message | none |
| Max. required back-up fuse | 630 mA (FF) |
| Impulse durability (line-line) | C1 - 1 kV / 500 A |
| | C2 - 10 kV / 5 kA |
| | C3 - 100 A |
| Impulse durability (line-earth) | C1 - 1 kV / 500 A |
| | C2 - 10 kV / 5 kA |
| | C3 - 100 A |

TTC-6-1X2-24DC-UT - Surge protection device



2906798

<https://www.phoenixcontact.com/us/products/2906798>

| | |
|-------------------------------|------------|
| | D1 - 500 A |
| Pulse reset time (line-line) | ≤ 700 ms |
| Pulse reset time (line-earth) | ≤ 1500 ms |

Additional technical data

| | |
|--|------------|
| Max. total discharge current $I_{\text{total max}} (8/20) \mu\text{s}$ | 20 kA (1x) |
|--|------------|

Environmental and real-life conditions

Ambient conditions

| | |
|---|------------------|
| Degree of protection | IP20 |
| Ambient temperature (operation) | -40 °C ... 85 °C |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |
| Altitude | ≤ 4000 m (amsl) |
| Permissible humidity (operation) | 5 % ... 95 % |

Approvals

Conformity/Approvals

| | |
|------------------|---------------------------------------|
| UL, USA / Canada | Class I, Div. 2, Groups A, B, C, D T4 |
|------------------|---------------------------------------|

Standards and regulations

| | |
|--------------------------|---|
| Standards/specifications | IEC 61643-21 |
| Note | 2000 + corrigendum 2001 + A1:2008, modified + A2:2012 |

EN 61643-21

| | |
|--------------------------|--------------------------|
| Standards/specifications | EN 61643-21 |
| Note | 2001 + A1:2009 + A2:2013 |

Mounting

| | |
|---------------|--------------------------|
| Mounting type | DIN rail: TH 35 - 7.5 mm |
|---------------|--------------------------|


TTC-6-1X2-24DC-UT - Surge protection device

2906798


<https://www.phoenixcontact.com/us/products/2906798>

Drawings

Circuit diagram

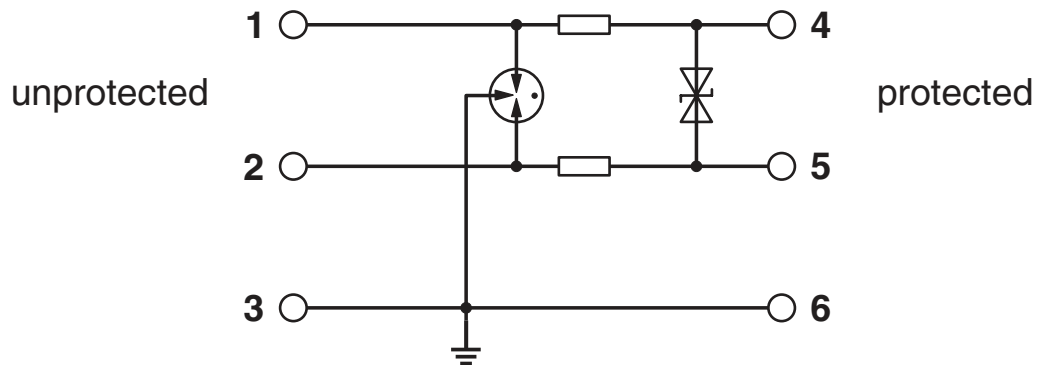

Diagram

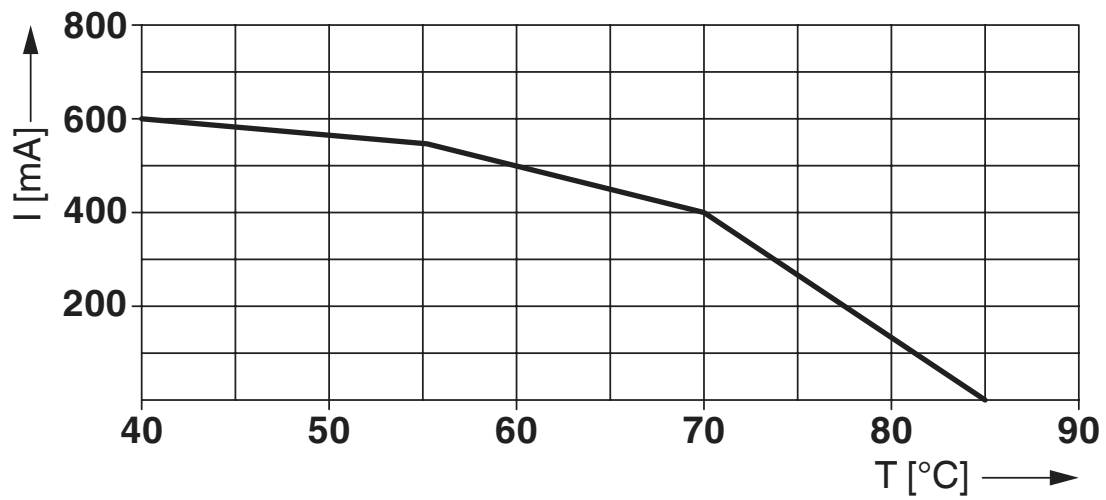


TTC-6-1X2-24DC-UT - Surge protection device

2906798

<https://www.phoenixcontact.com/us/products/2906798>



Dimensional drawing

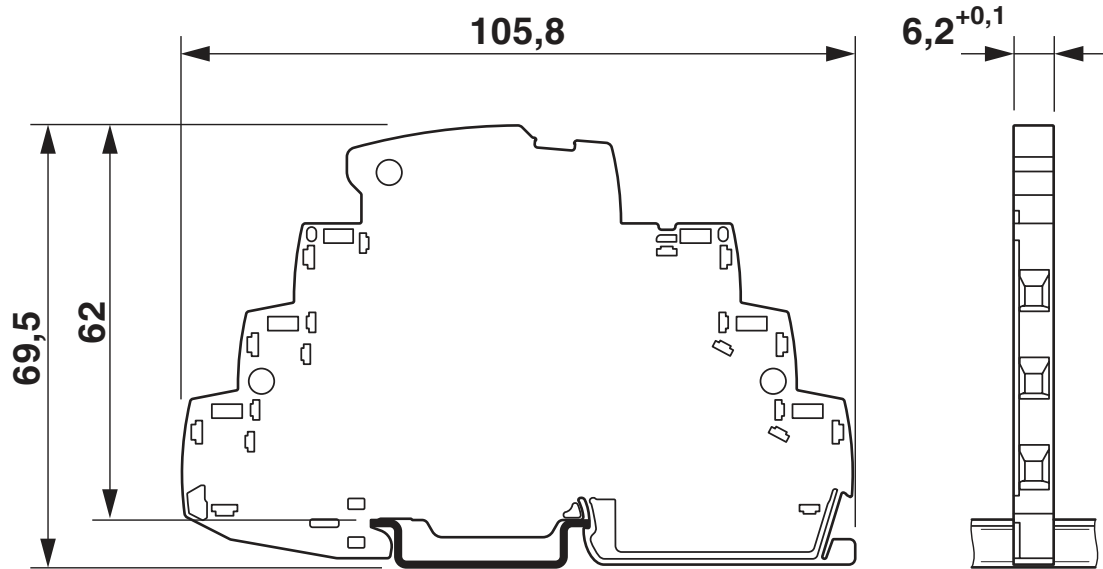

TTC-6-1X2-24DC-UT - Surge protection device



2906798

<https://www.phoenixcontact.com/us/products/2906798>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2906798>



CSA

Approval ID: 70136717



DNV GL

Approval ID: TAE000027G



UL Listed

Approval ID: FILE E 138168



CSAus

Approval ID: 70136717

UAE-RoHS

Approval ID: 22-06-16191



cUL Listed

Approval ID: FILE E 333250



UL Listed

Approval ID: FILE E 333250

cCSAus

cULus Listed

TTC-6-1X2-24DC-UT - Surge protection device



2906798

<https://www.phoenixcontact.com/us/products/2906798>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27130807 |
| ECLASS-13.0 | 27171501 |

ETIM

| | |
|----------|----------|
| ETIM 8.0 | EC000943 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121600 |
|-------------|----------|

TTC-6-1X2-24DC-UT - Surge protection device



2906798

<https://www.phoenixcontact.com/us/products/2906798>

Environmental product compliance

| | |
|------------|--|
| REACH SVHC | Lead 7439-92-1 |
| China RoHS | Environmentally Friendly Use Period = 50 years |
| | For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads" |

TTC-6-1X2-24DC-UT - Surge protection device



2906798

<https://www.phoenixcontact.com/us/products/2906798>

Accessories

ZBF 6 CUS - Zack Marker strip, flat

0825027

<https://www.phoenixcontact.com/us/products/0825027>



Zack Marker strip, flat, Strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

ZBF 6:UNBEDRUCKT - Zack Marker strip, flat

0808710

<https://www.phoenixcontact.com/us/products/0808710>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

TTC-6-1X2-24DC-UT - Surge protection device



2906798

<https://www.phoenixcontact.com/us/products/2906798>

ZBF 6/WH-100:UNBEDRUCKT - Zack Marker strip, flat

0808736

<https://www.phoenixcontact.com/us/products/0808736>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 1000

ZBF 6,QR:FORTL.ZAHLEN - Zack Marker strip, flat

0808765

<https://www.phoenixcontact.com/us/products/0808765>



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

TTC-6-1X2-24DC-UT - Surge protection device



2906798

<https://www.phoenixcontact.com/us/products/2906798>

CLIPFIX 35-5 - End clamp

3022276

<https://www.phoenixcontact.com/us/products/3022276>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

TTC-6-FC-UT - Fuse holder

1054762

<https://www.phoenixcontact.com/us/products/1054762>



Fuse carrier for surge protective devices of the TERMITRAB complete product range with screw connection technology. Multi-level connection on TTC-6 housings possible. For conventional 5x20 mm miniature fuses.

TTC-6-1X2-24DC-UT - Surge protection device

2906798

<https://www.phoenixcontact.com/us/products/2906798>

SSA 3-6 - Shield connection

2839295

<https://www.phoenixcontact.com/us/products/2839295>

Shield fast connection for 3 ... 6 mm cable diameter. Potential connecting cable:
200 mm, 1 mm², color: black



SSA 5-10 - Shield connection

2839512

<https://www.phoenixcontact.com/us/products/2839512>

Shield fast connection for 5 ... 10 mm cable diameter. Potential connecting cable:
200 mm, 1 mm², color: black



TTC-6-1X2-24DC-UT - Surge protection device

2906798

<https://www.phoenixcontact.com/us/products/2906798>



X-PEN 0,35 - Marker pen

0811228

<https://www.phoenixcontact.com/us/products/0811228>



Marker pen without ink cartridge, for manual labeling of markers, labeling extremely wipe-proof, line thickness 0.35 mm

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com