




- EP13 Design
- 15 W Forward Mode
- Operating Temperature: 40°C ~ +85°C including temp rise

Electrical Specifications @ 25°C					
INDUCTANCE	LEAKAGE INDUCTANCE	DCR CH-502A	HI-POT TEST	TURNS RATIO	GAP
250KHz/0.5V HP-4284A	250KHz/0.5V HP-4284A	1-2: 55 mOHM Max	PRI TO SEC: DC 500V 3mA for 2 Sec	1-2: 10,9-6,7= 0.24±1%	NO CORE GAP
1-2: 705uH NOM	1-2: 0.5uH Max.	10,9-6,7: 6.0 mOHM Max	COIL TO CORE: DC 500V 3mA for 2 Sec	1-2: 4-5= 0.24±1%	
	(shorted pins 4,5,6,7,9,10)	(shorted pins 6,7,9,10)			


All specifications subject to change without notice.

MECHANICAL


DIMENSION:
UNIT: inch

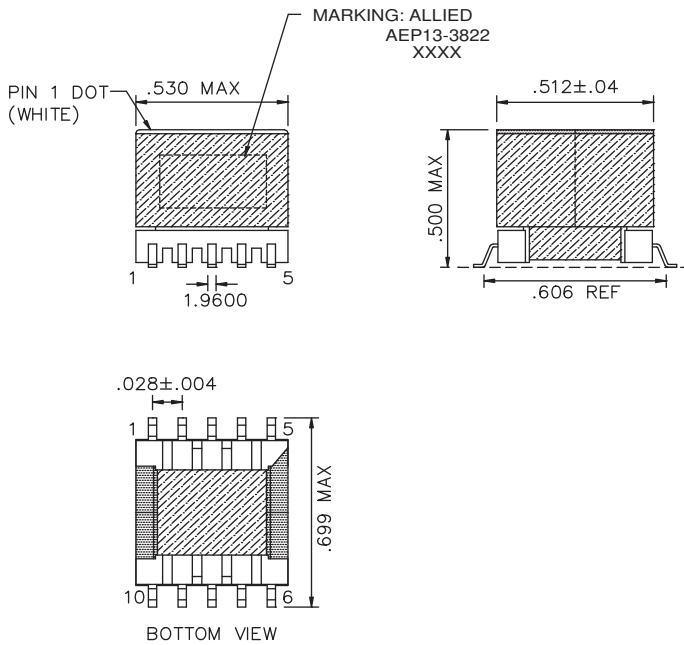

SCHEMATIC:

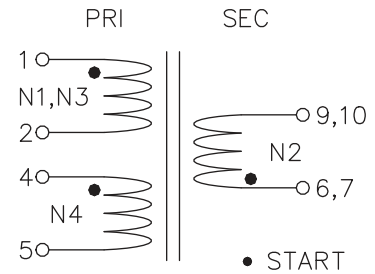

WINDING:

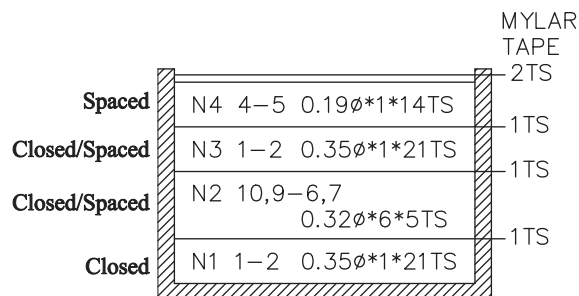

NOTE:
1.PIN 1 DOT.
2.CORE FIX TAPE 2TS.