


Economy Power 2.5 TE Internal #: 2-1969443-0 PCB Latches, Locks & Retainers, TPA (Terminal Position Assurance), 20 Position, .098 in [2.5 mm] Centerline, 1 Row, Economy Power 2.5 View on TE.com >



Connectors > PCB Connectors > PCB Connector Accessories > PCB Connector Hardware > PCB Latches, Locks & Retainers

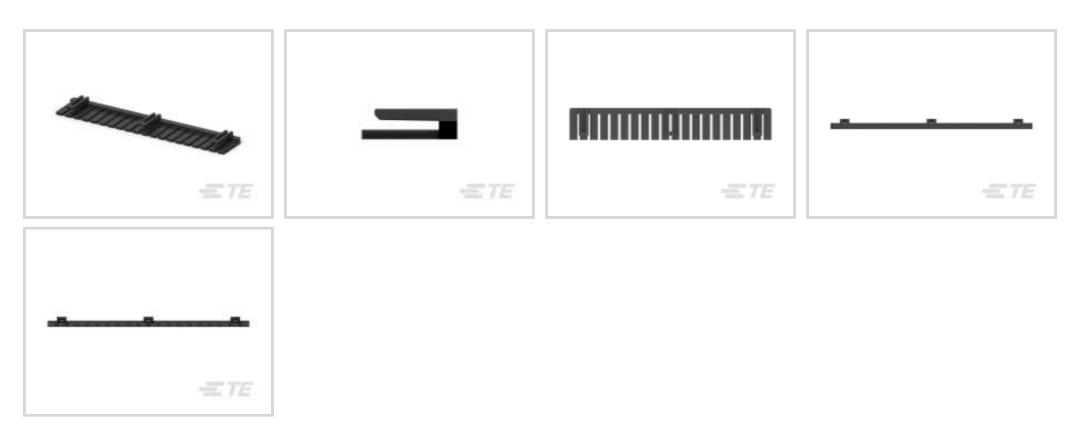

Connector & Contact Retention Accessory Type: TPA (Terminal Position Assurance)

Number of Positions: 20

Centerline (Pitch): 2.5 mm [.098 in]

Number of Rows: 1

Operating Temperature Range: -55 – 105 °C [-67 – 221 °F]

Features

Product Type Features

Connector & Contact Retention Accessory Type	TPA (Terminal Position Assurance)	
Configuration Features		
Number of Positions	20	
Number of Rows	1	
Body Features		
Primary Product Material	Nylon GF	
Primary Product Color	Black	
Housing Features		
Centerline (Pitch)	2.5 mm[.098 in]	
Dimensions		
Product Height	2.51 mm[.099 in]	
Usage Conditions		
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]	
Industry Standards		

C For support call+1 800 522 6752

2-1969443-0

PCB Latches, Locks & Retainers, TPA (Terminal Position Assurance), 20 Position, .098 in [2.5 mm] Centerline, 1 Row, Economy Power 2.5



Glow Wire Rating	Standard Part - Not Glow Wire
Packaging Features	
Packaging Quantity	400
Packaging Method	Bag

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC	
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.	
Solder Process Capability	Not applicable for solder process capability	

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts



2-1969443-0


PCB Latches, Locks & Retainers, TPA (Terminal Position Assurance), 20 Position, .098 in [2.5 mm] Centerline, 1 Row, Economy Power 2.5



Also in the Series | Economy Power 2.5



Insertion & Extraction Tools(1)



PCB Headers & Receptacles(494)





	And the second
Wire-to-Board Connector Assemblies & Housings(311)	Wire-to-Board Connector Contacts(6)

Customers Also Bought



= TE	ETE	= TE	
TE Part #T4113011031-000 M12 M, 3P GOLD A_CODE RA SHIELDED PG7	TE Part #2329387-6 PB OFF/ON FC RED M1 TERM WHI LED IP68	TE Part #2-2329387-1 PB OFF/ON FC BLU M1 TERM WHI LED IP68	TE Part #2-1744417-0 20 POS EP 2.5 HSG, GLOW WIRE
		I TE	TE TE
TE Part #2-1969442-0 EP 2.5 TPA Housing, 20 Pos	TE Part #2232511-3 3P, RAST 5 TAB HEADER, THV	TE Part #4-1879126-0 RN 0402 154R 0.1% 10PPM CUT LENGTH	TE Part #5-1879127-5 RN 0402 383R 0.1% 10PPM CUT LENGTH



2-1969443-0

PCB Latches, Locks & Retainers, TPA (Terminal Position Assurance), 20 Position, .098 in [2.5 mm] Centerline, 1 Row, Economy Power 2.5



Documents

CAD Files 3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-1969443-0_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-1969443-0_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-1969443-0_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages 7-1773461-6_EP2.5_Connector_Series

English

Product Specifications Application Specification

English

Instruction Sheets Instruction Sheet (U.S.)

English