

## Housing - HC-B 24-TFL-H-O1M25G - 1460203

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



HEAVYCON sleeve housing B24, for single locking latch, height 76 mm, with support 1x M25, straight conductor exit



### Key commercial data

Packing unit	1 1
Weight per Piece (excluding packing)	256.0 GRM
Custom tariff number	85389099
Country of origin	Germany

### Classifications

#### eCl@ss

eCl@ss 4.0	27140816
eCl@ss 4.1	27140816
eCl@ss 5.0	27143424
eCl@ss 5.1	27143424
eCl@ss 6.0	27143424
eCl@ss 7.0	27440209
eCl@ss 8.0	27440209

#### ETIM

ETIM 3.0	EC000437
ETIM 4.0	EC000437
ETIM 5.0	EC000437

#### UNSPSC

UNSPSC 6.01	31261502
UNSPSC 7.0901	31261502
UNSPSC 11	31261502

# Housing - HC-B 24-TFL-H-O1M25G - 1460203

## Classifications

### UNSPSC

UNSPSC 12.01	31261502
UNSPSC 13.2	31261502

## Accessories

### Accessories

#### Full screw connection

Cable gland - HC-K-KV-M25(11-17) - 1690639



Plastic screw connection up to 5 bar, thread length: 8 mm, cable diameter: 11 - 17 mm, WAF 29, screw connection: M25

Cable gland - HC-M-KV-M25(11-16) - 1690574



Metal screw connection up to 5 bar, thread length: 7 mm, cable diameter: 11 - 16 mm, WAF 27, screw connection: M25

Cable gland - HC-M-KV-M25(14-21) - 1646007



Metal screw connection up to 5 bar, thread length: 7 mm, cable diameter: 14 - 21 mm, WAF 34, screw connection: M25

Cable gland - HC-M-KV-M25(1ASI) - 1584020



Metal screw connection for an AS-Interface flat-ribbon conductor, thread type M25

#### Multiple screw connection

## Housing - HC-B 24-TFL-H-O1M25G - 1460203

### Accessories

Cable gland - HC-M-KV-M25(1X10/1X11) - 1580228




Special cable screw connection M25, brass nickel-plated, grommet with 10 mm and 11 mm holes

---

### Drawings

Dimensioned drawing

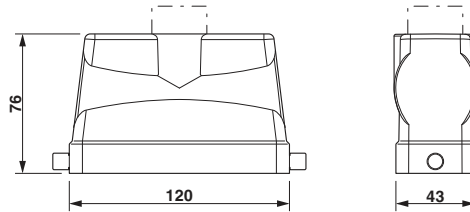

Dimensional drawing