

工	G	нт. П	m	C C



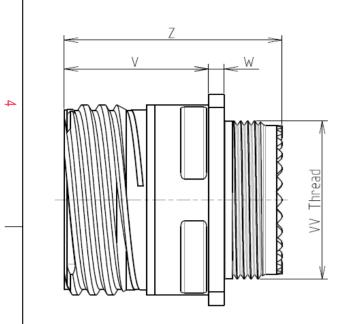

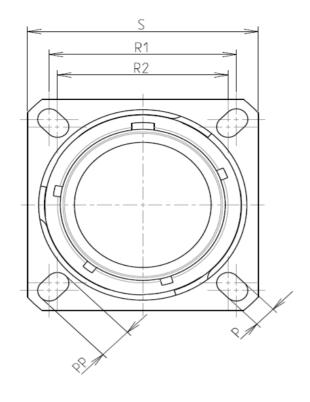

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium				
-Shell Plating	: Olive drab Cadmium				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy 0.8µm minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	: -65°C to +175°C				
-Salt Spray	: 500 hours				

: 14.95 g ± 10%

8D 0

G

11

W

01


В


F

А

Connector dimension Dim Nominal			
P	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		

Е



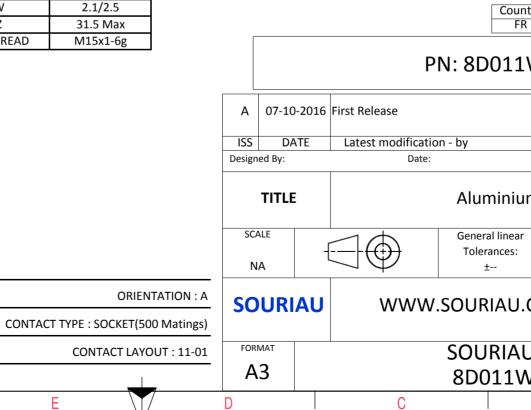

	σ		A			
		}			4	
AS EXA	AMPLE				3	
s whic er of t	non-conformit ch does not co he Parties or b on, technical n Jurisd	mply with by a third part			2	
1W	LW01BA					
				MOD N°		
		CUSTOME	R DRAWING			
um	m Receptacle 8D series					
ar :			PROJECT			
		-	cument is the prop	erty of	1	
	COM SOURIAU it must not be reproduced or communicated without permission					
	J DRG N° SHEET					
WC)1BA-C		Α	1/2	J	
	D	1	A			

	<u> </u>	۵	н П	m	D	0
		Contact Layout				Panel Cutout
4		01			Â	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Ctc	1#12 11-01 X Y]		* *	
ω	A	0 0]			Dim ØA ØAA R1 ØT
	_					SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendati
N						Country FR PN: 8D011W
_	-				A 07-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
-					SCALE NA	Aluminium General linear Tolerances: ±
					FORMAT	SOURIAU
	Н	G	F	E	D A3	8D011W0

