

τ	വ	н <b>т</b>	m	0



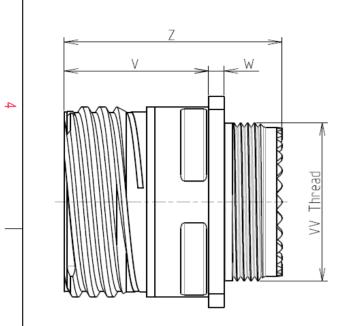

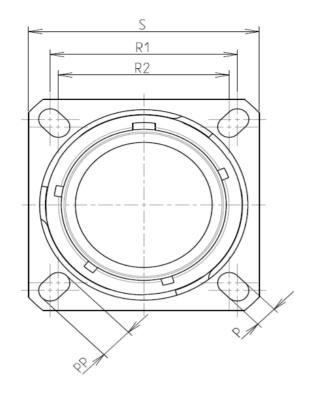

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	-65℃ to +175℃			
-Salt Spray	: 500 hours			

: 12.01 g ± 10%

8D 0

G

11

W

01


А


F

А

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M15x1-6g

Е



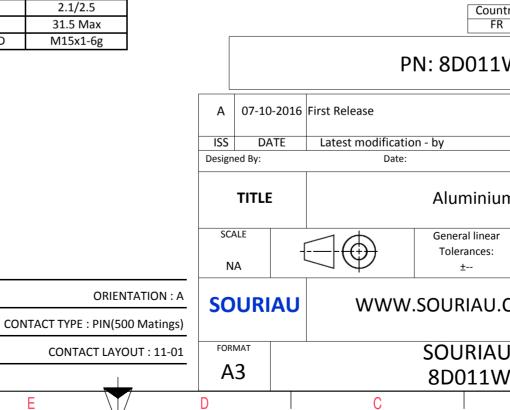

Φ					
		4			
S EXAMPLE		3			
any non-conform which does not c er of the Parties or idation, technical intry Juris R 1W01AA	comply with r by a third party	2			
	CUSTOMER DRAWING				
um Receptacle 8D series					
ar	NPRDS / PROJECT <b>859</b>				
	This document is the property of	1			
.com	COURIAL				
U DRG N° SHEET					
W01AA-C	1/2				
В	A				

		G	гт –	m		0
		Contact Layout				Panel Cutout
4		01			ţ.	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
		1#12 11-01	1		¥ 	
ω	Ctc A	X Y 0 0				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of
22						(professional recommendati Country FR PN: 8D011W
					A 07-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
-					TITLE SCALE NA	Aluminium General linear Tolerances: ±
					FORMAT A3	J WWW.SOURIAU.CO SOURIAU 8D011W0
	H	G	F	E	D	C

