



50 ohm 2.92mm plug to 2.92mm jack DC Block inner, 10MHz to 40GHz VSWR1.3, rated 50 Volt in Stainless Steel

DC Blocks Technical Data Sheet

PE8267

Features

- Inner DC Blocks with Stainless Steel Body
- 2.92mm connectorized configuration
- Operates from 10 MHz to 40 GHz
- 50 Ohm Impedance

Applications

- Test & Measurement
- Ground Loop Elimination
- Signal to Noise Ratio (SNR) Improvement

Description

Pasternack's PE8267 is an inner DC block with 2.92mm connectors. It has a blocking capacitor on the inner conductor and operates from 10 MHz to 40 GHz. Our 2.92mm DC block offers good insertion loss of 1.3 dB and has a maximum operating voltage of 50 Vdc. DC blocks are commonly used to filter out unwanted DC signals, while allowing AC drive signals to pass through. They can help improve signal to noise ratio (SNR), eliminate ground loops, or provide isolation in your test setup. All of Pasternack's DC blocks are in stock and available to ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	0.01		40	GHz
Impedance		50		Ohms
VSWR			1.3:1	
Insertion Loss			1.3	dB
Operating Voltage (DC)			50	Volts

Mechanical Specifications

Size

Length	0.835 in [21.21 mm]
Width	0.315 in [8 mm]
Height	0.315 in [8 mm]
Weight	0.05 lbs [22.68 g]
Housing Material and Plating	Stainless Steel

Configuration

Package Type	Connectorized
--------------	---------------

Description	Connector 1	Connector 2
Type	2.92mm Male	2.92mm Female
Inner Conductor Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 ohm 2.92mm plug to 2.92mm jack DC Block inner, 10MHz to 40GHz VSWR1.3, rated 50 Volt in Stainless Steel PE8267](#)



50 ohm 2.92mm plug to 2.92mm jack DC Block inner, 10MHz to 40GHz VSWR1.3, rated 50 Volt in Stainless Steel

DC Blocks Technical Data Sheet

PE8267

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

50 ohm 2.92mm plug to 2.92mm jack DC Block inner, 10MHz to 40GHz VSWR1.3, rated 50 Volt in Stainless Steel from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 ohm 2.92mm plug to 2.92mm jack DC Block inner, 10MHz to 40GHz VSWR1.3, rated 50 Volt in Stainless Steel PE8267](#)


URL: <https://www.pasternack.com/50-ohm-2.92mm-dc-block-10-mhz-40-ghz-pe8267-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE8267 CAD Drawing

50 ohm 2.92mm plug to 2.92mm jack DC Block inner, 10MHz to 40GHz VSWR1.3, rated 50 Volt in Stainless Steel

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	1/25/22	JNAJERA

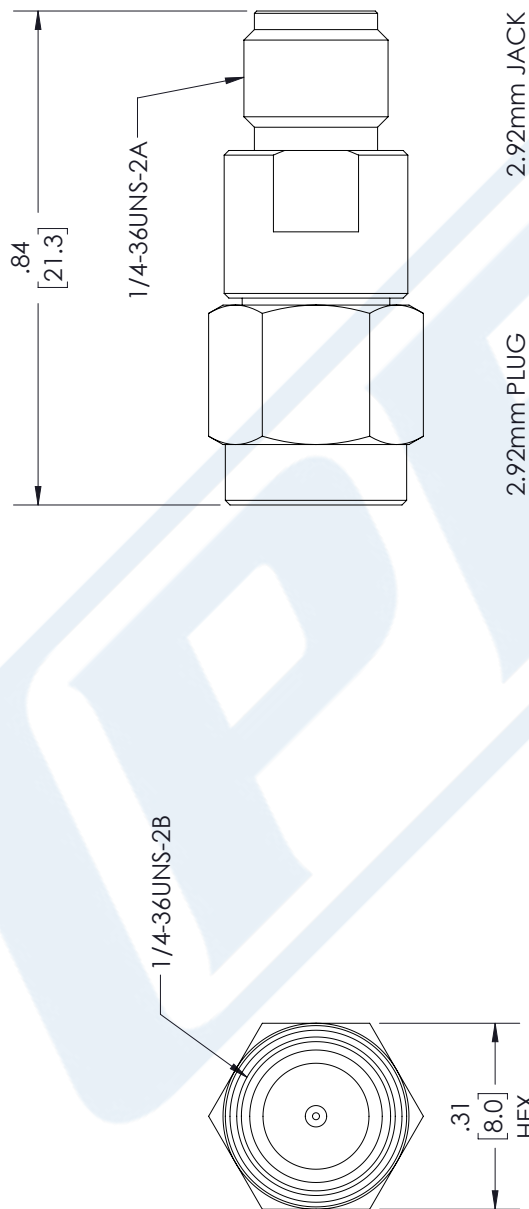

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

.X = ±.2	[5.08]	FRACTIONS
.XX = ±.02	[.51]	± 1/32
.XXX = ±.005	[.13]	ANGLES ± 1°

CABLE LENGTH (L) TOLERANCES:

L ≤ 12	[305]	= +1 [25] / -0
12 [305] < L ≤ 60	[1524]	= +2 [51] / -0
60 [1524] < L ≤ 120	[3048]	= +4 [102] / -0
120 [3048] < L ≤ 300	[7620]	= +6 [152] / -0
300 [7620] < L		= +5%L / -0

ALL DIMENSIONS SHOWN
ARE FOR REFERENCE ONLY.

PE PASTERNAK
an INFINIT® brand

Pasternack Enterprises, Inc.
P.O. Box 16759, Irvine, CA 92623.
Phone: 1.949.261.1920 | 1.866.727.8376
Fax: 1.949.261.7451
Website: www.pasternack.com
E-mail: sales@pasternack.com

SIZE: A CAGE CODE: 53919 DRAWN BY: HBAKKE ITEM NO.: PE8267

THIRD-ANGLE PROJECTION

THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

REV A