

ARTESYN SMT15E SERIES

Non-Isolated DC-DC Converter



Advanced Energy's Artesyn SMT15E_12V series non-isolated DC-DC converter accepts a 10 to 14 Vdc input and produces an output that can be trimmed over a very wide 0.8 to 3.63 Vdc range to satisfy a broad diversity of semiconductor power needs. Rated at 49.5 watts, the converter has a typical efficiency of 94% and can deliver up to 15 amps. Standard features include remote On/Off, remote sense and comprehensive protection against short-circuit and overtemperature conditions. Packaged as a low profile surface-mount module, it has a 0.53 x 1.3 inch (13.5 x 33 mm) footprint and an installed height of only 0.32 inch (8.2 mm).

DATA SHEET

Total Power:

49.5 Watts

Input Voltage:

10 - 14 Vdc

of Outputs:

Single

SPECIAL FEATURES

- 15 A current rating
- Input voltage range: 10 - 14 Vdc
- Output voltage range: 0.8 - 3.63 V
- Ultra high efficiency: 94% @ 12 V_{in} and 3.3 V_{out}
- Extremely low internal power dissipation
- Minimal thermal design concerns
- Designed-in reliability: MTBF of 6,920,000 hours per Telcordia SR-332
- Ideal solution where board space is at a premium or tighter card pitch is required
- Industry standard surface-mount footprint
- Available RoHS compliant
- Two year warranty

SAFETY

- UL, cUL CAN/CSA 22.2 No. E186249
- TÜV Product Service (EN60950) Certificate No. B 08 05 51485 378
- Certificate No. B 03 10 38572
- CB report and certificate to IEC60950 DE3-51686M1



ELECTRICAL SPECIFICATIONS

Input		
Input voltage range		10 - 14 Vdc
Input current	No load (max.)	100 mA typical
Input current (max.)		4.5 A max. @ Io max. and Vout = 3.3 V
Input reflected ripple		100 mA rms
Remote ON/OFF		See Note 1
Start-up time		<20 ms
Output		
Voltage adjustability		0.8 - 3.63 Vdc
Setpoint accuracy		±0.4%
Line regulation		±0.2%
Load regulation		±1.0%
Total error band		±3.0%
Minimum load		0 A
Overshoot/Undershoot		None
Ripple and noise	5 - 20 MHz	60 mV pk-pk 25 mV rms max.
Temperature coefficient		±0.01% / °C
Transient response		100 mV max. deviation 100 µs recovery to within ±1.0%
Remote sense		10% Vo compensation

All specifications are typical at nominal input, full load at 25°C unless otherwise stated.

GENERAL SPECIFICATIONS

Efficiency		94%
Insulation voltage		Non-isolated
Switching frequency	Fixed	200 kHz
Approvals and standards		EN60950 UL/cUL60950
Material flammability		UL94V-0
Dimensions	L x W x H	33.02 x 13.46 x 8.21 mm 1.3 x 0.53 x 0.323 inches
Weight		6.3 g (0.22 oz)
Coplanarity		100 µm
MTBF	Telcordia SR-332	7,042,000 hours

ENVIRONMENTAL SPECIFICATIONS

Thermal performance	Operating ambient temperature	-0 °C to +85 °C
(See Note 2)	Non-operating temperature	-40 °C to +125 °C
Protection		
Short-circuit	Continuous	
Thermal	Automatic recovery	

EMC CHARACTERISTICS

Electrostatic discharge	EN61000-4-2, IEC801-2
Conducted immunity	EN61000-4-6
Radiated immunity	EN61000-4-3

ORDERING INFORMATION

Model Number ⁽⁴⁾	Output Power (Max.)	Input Voltage	Output Voltage	Output Current (Min.)	Output Current (Max.)	Efficiency (Typical) ⁽³⁾	Regulation	
							Line	Load
SMT15E-12W3V3J	49.5 W	10 - 14 Vdc	0.8 - 3.63 V	0 A	15 A	94%	±0.2%	±1.0%

PART NUMBER SYSTEM WITH OPTIONS

Product Family	Rated Output Current	Performance	Input Voltage	Type of Output	Output Voltage	Packaging Options ⁽⁵⁾
SMT	15	E	12	W	3V3	TJ
SMT = Surface Mount	15 - 15 Amps	E = Enhanced performance	12 = 10 - 13 Vdc	W = Wide	0.8 - 3.63 Vdc	No "-T" suffix = Pb-free (RoHS 6/6 compliant) in trays

OUTPUT VOLTAGE ADJUSTMENT

The ultra-wide output voltage trim range offers major advantages to users who select the SMT15E-12W3V3J. It is no longer necessary to purchase a variety of modules in order to cover different output voltages. The output voltage can be trimmed in a range of 0.8 Vdc to 3.63 Vdc. When the SMT15E-12W3V3J converter leaves the factory the output has been adjusted to the default voltage of 0.8 V.

Notes:

1. The SMT15E features a 'Positive Logic' Remote ON/OFF operation. If not using the Remote ON/OFF pin, leave the pin open (the converter will be on). The Remote ON/OFF pin is referenced to ground. The following conditions apply for the SMT15E:

Configuration	Converter Operation
Remote pin open circuit	Unit is ON
Remote pin pulled low [Von/off < 0.8 V]	Unit is OFF
Remote pin pulled high [Von/off >1.6 V]	Unit is ON


2. Full derating curves available in both the Longform Datasheet and Application Note.

3. Typical efficiency figures for various output voltages are as follows:

1.2 V	83%
1.5 V	85.5%
1.8 V	87.5%
2.0 V	91%
2.5 V	92%

5. NOTICE: Some models do not support all options. Please contact your local Artesyn representative or use the on-line model number search tool at <http://www.artesyn.com> to find a suitable alternative.

MECHANICAL DRAWINGS

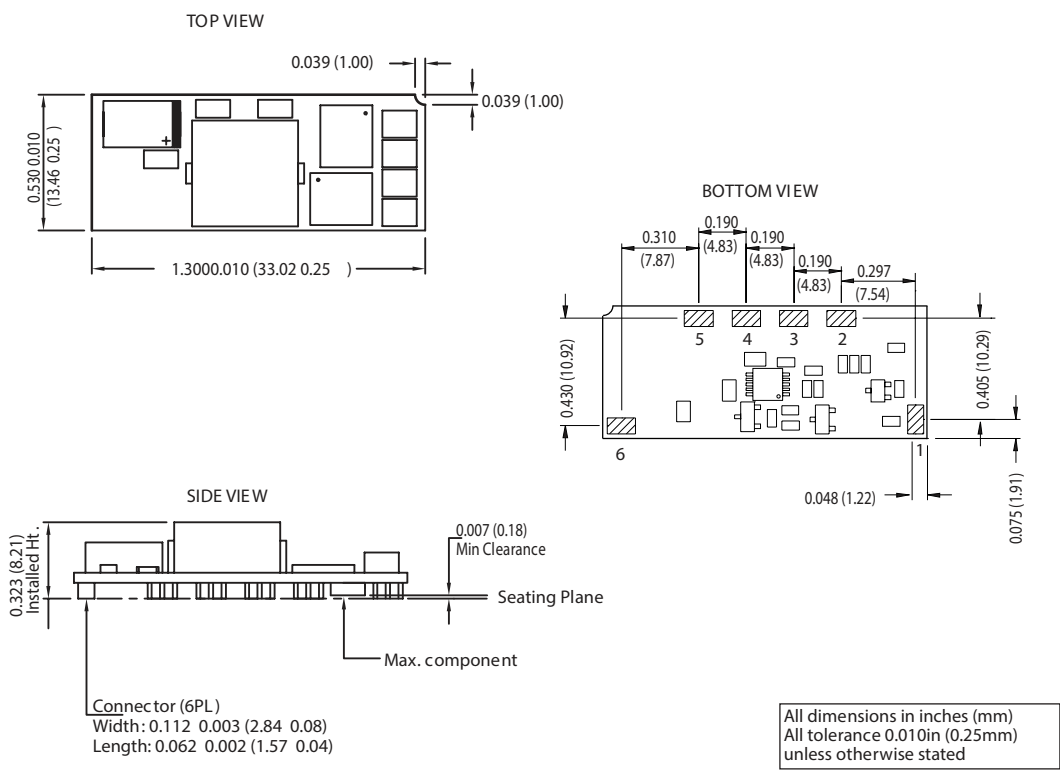

Pin Assignments	
Pin	Function
1	Remote ON/OFF
2	Remote Sense +
3	Trim
4	+Vout
5	Ground
6	+Vin



For international contact information,
visit advancedenergy.com.

powersales@aei.com (Sales Support)
productsupport.ep@aei.com (Technical Support)
+1 888 412 7832

ABOUT ADVANCED ENERGY

Advanced Energy (AE) has devoted more than three decades to perfecting power for its global customers. AE designs and manufactures highly engineered, precision power conversion, measurement and control solutions for mission-critical applications and processes.

Our products enable customer innovation in complex applications for a wide range of industries including semiconductor equipment, industrial, manufacturing, telecommunications, data center computing, and medical. With deep applications know-how and responsive service and support across the globe, we build collaborative partnerships to meet rapid technological developments, propel growth for our customers, and innovate the future of power.

PRECISION | POWER | PERFORMANCE

Specifications are subject to change without notice. Not responsible for errors or omissions. ©2021 Advanced Energy Industries, Inc. All rights reserved. Advanced Energy®, AE® and Artesyn™ are U.S. trademarks of Advanced Energy Industries, Inc.