


CK4,0-ED-6,00ST AG

Order No.: 1663268



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1663268>

Turned 4.0 crimp contact, individual male contact, core diameter 6.00 mm², silver-plated

| Commercial data | |
|--------------------------|--|
| GTIN (EAN) |  |
| sales group | D090 |
| Pack | 25 pcs. |
| Customs tariff | 74152900 |
| Catalog page information | Page 529 (PC-2009) |

Product notes

WEEE/RoHS-compliant since:
12/01/2005



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

| Electrical characteristics | |
|---------------------------------|--------------------|
| Note | For HC-M-3 modules |
| Ambient temperature (operation) | -40 °C ... 125 °C |
| Mechanical characteristics | |
| Conductor cross-section | 6 mm² |

| | |
|---|--------|
| Connection cross-section AWG | 10 |
| Stripping length of the individual wire | 9.6 mm |
| Insertion/withdrawal cycles | ≥ 500 |

General characteristics

| | |
|------|-------------------------|
| Type | Individual male contact |
|------|-------------------------|

Material data

| | |
|--------------------------|--------------------|
| Contact material | Copper alloy |
| Contact surface material | hard-silver plated |

Certificates / Approvals




Certification GOST, UL

Accessories

| Item | Designation | Description |
|--------------|----------------------|---|
| Tools | | |
| 1662735 | CK4,0-EWZ | Contact removal tool, for rotated CK-4,0-... contacts |
| 1205846 | CRIMPFOX-4,0-ED-2,50 | Crimping pliers, for CK 4.0... contacts, for conductor cross sections 1.5 - 2.5 mm ² |
| 1205859 | CRIMPFOX-4,0-ED-6,00 | Crimping pliers, for CK 4.0... contacts, for conductor cross sections 3.0 - 6.0 mm ² |

Diagrams/Drawings

Dimensioned drawing

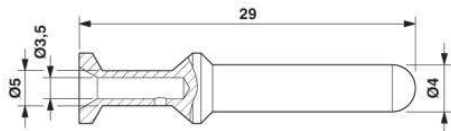

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;