

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH — BASIC

CATALOG LISTING

V3L-2303

CQ-X1612

CATALOG LISTING
V3L-2303
PAGE 1 OF 1

M

ISSUE
2

REPLACES X96891-V3L

RELEASE NO. PR-20345

CHECK

CHECK

22 OCT 92

DCS



CHECK

20 OCT 92

JWB

REVISIONS
A CO
80192
DCS
17 OCT 95

DDM/CAD
DRAWN

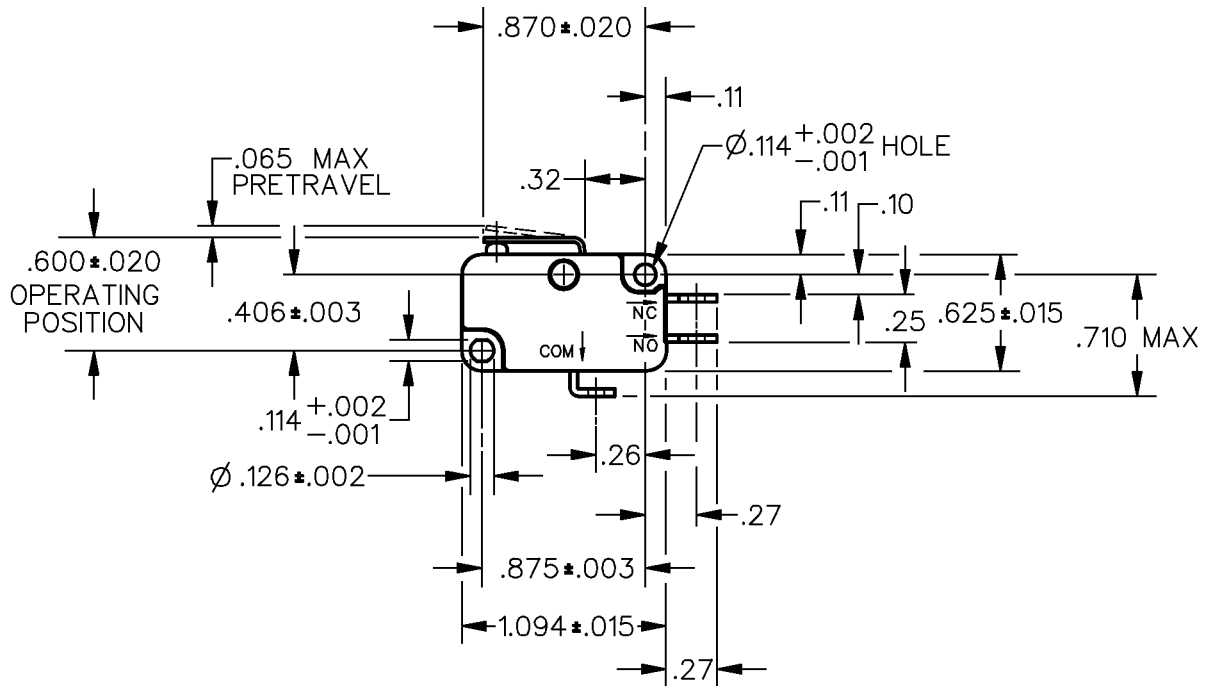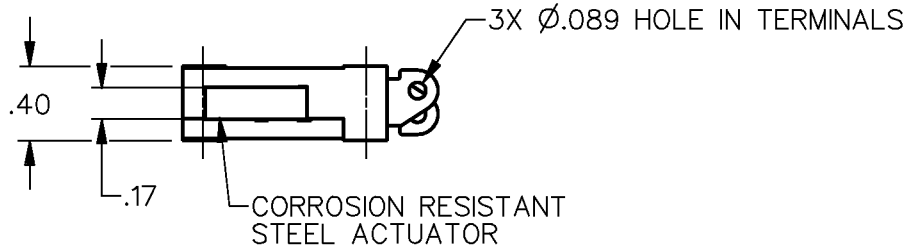


NOTE
1 — TERMINALS ARE PLATED FOR SOLDERING

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS		ELECTRICAL DATA		SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — 55 GRAMS MAX	CONTACT ARRANGEMENT S P D T L131 10A 1/4HP 125 OR <u>250</u> VAC 1/2A 125 VDC, 1/4A 250 VDC 3A 125 VAC "L" 	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	ONE PLACE (.0)	± .030	
RELEASE FORCE — — — 2 GRAMS MIN			TWO PLACE (.00)	± .015	
DIFFERENTIAL TRAVEL — — — .015 MAX			THREE PLACE (.000)	± .005	
OVERTRAVEL — — — — .030 MIN			ANGLES	±	
RELEASE TRAVEL — — — — .009 MIN			WEIGHT		

