



Versatile, Reliable high speed serial connectivity

Features and Benefits

- Bi-directional speeds up to 921.6 Kbps on all ports
- Universal 3.3/5v PCI bus slot support (PCI 2.3 compliant)
- PCI-X compatible
- Flexible solutions with 1, 2, 4, 8 or 16 ports
- ESD surge protection for peace of mind
- Full modem control and hardware/software flow control
- 64 bit support on most OS
- Lifetime warranty for security and peace of mind


Applications:

- Connecting EPOS devices for Retail Point of Sale
- Access serial devices for factory, industrial and warehouse automation
- Connectivity for Data Acquisition in Kiosk's and multi-user work groups
- Connect modem pools for remote access dial-in/dial-out

Perle UltraPort is the ideal solution for applications where a fixed count of local serial ports is required. With 1 to 16 EIA-232 serial ports, the Perle UltraPort range offers high performance, excellent throughput and reliable solutions that rival the competition. (For scalable solutions please see Perle's SX and RIO range.)

Overview

The Perle UltraPort Universal 3.3/5v PCI cards are the most advanced serial card solutions on the market today providing a flexible range of solutions for retail point of sale, data acquisition, office automation, advanced kiosk design and much more. Perle UltraPort communicates at bi-directional speeds up to 921.6 Kbps per port with the highest standard of surge protection available to ensure the reliability and security of your data.

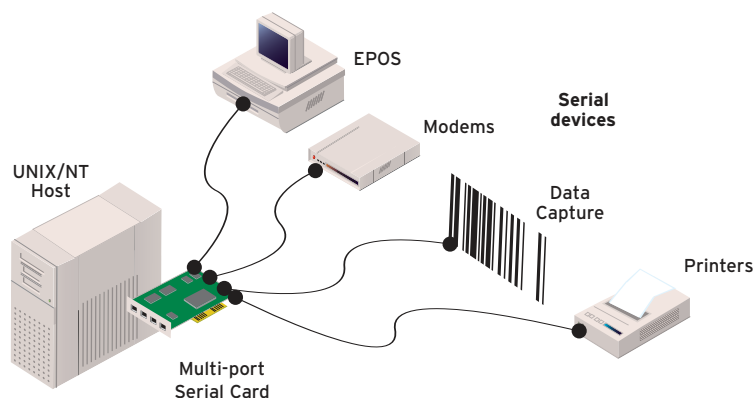

A wide variety of DB9, DB25 and RJ45 cables and connector boxes support the most popular pin-outs from Specialix International, Chase Research and Digi International. As you upgrade servers and cards to the latest PCI standard, only Perle can ensure you don't spend valuable budget allocations on re-cabling costs.

Class Leading Support and Warranty

The Perle UltraPort Multi-port Cards are backed by the best service and support in the industry, including Perle's unique lifetime warranty. Choose Perle for the highest levels of performance, flexibility and quality since 1976.

Technical Specifications

Features

- Half-length PCI cards with 1, 2, 4, 8 or 16 RS232 ports
- Speeds up to 921.6 Kbps per port
- Universal 3.3/5v PCI Bus slot support
- PCI 2.3 compliant and PCI-X compatible
- Full modem control
- Hardware and software flow control
- Industry standard ESD surge protection across all ports
- 64 byte write and 64 byte read FIFOs

Connectors

- UltraPort1: 1 on-board DB9M
- UltraPort2: 2 on-board DB9M
- UltraPort4: 4 on-board RJ45
- UltraPort8i: on-board RJ12
- UltraPort8: Single VHDCI-68 female connector
 - Connector Options include DB9, DB25 and RJ45 connector boxes and fan-out cables with Specialix International, Chase Research and Digi International standard pin-outs
- UltraPort16: Dual VHDCI-68 female connectors
 - Connector Options include DB9, DB25 and RJ45 connector boxes and fan-out cables with Specialix International, Chase Research and Digi International standard pin-outs

Signal support

TXD, RXD, RTS, CTS, DTR, DCD, DSR, RI

Approvals

- IEC 60950
- EN 60950
- ANSI/UL 60950
- EN 55024
- FCC Part15 ,Class B
- EN55022 Class B
- CAN/CSA 22.2, No.60950
- ICES-003, Class B

Supported Operating System Drivers

- Linux 32/64 bit
- Sun Solaris 32/64 bit Intel and SPARC
- SCO OpenServer
- SCO UnixWare
- Windows®95, 98
- Windows®2000
- Windows®NT
- Windows®XP 32/64 bit
- Windows®Server 2003 32/64 bit
- Windows®Vista 32/64 bit

Power Requirements

- UltraPort1, 2:
 - +5V +/-5% 140mA
 - +12V +/-5% 60mA
- UltraPort4:
 - +5V +/-5% 320mA
 - +12V +/-5% 220mA
- UltraPort8, 8i:
 - +5V +/-5% 400mA
 - +12V +/-5% 420mA
- UltraPort16:
 - +5V +/-5% 520mA
 - +12V +/-5% 550mA

Environmental

- Operating temperature: 0°C to 55°C, 32°F to 131°F
- Storage temperature: -40°C to 66°C, -40°F to 150°F
- Relative Humidity: 10 to 90%, non condensing

Dimensions:

- UltraPort1: 98.44mm (H) x 139.69mm (L)
- UltraPort2: 98.44mm (H) x 139.69mm (L)
- UltraPort4: 98.44mm (H) x 139.69mm (L)
- UltraPort4 LP: 64.35mm (H) x 119.67mm (L)
- UltraPort8, 8i: 98.44mm (H) x 139.69mm (L)
- UltraPort16: 98.44mm (H) x 187.92mm (L)

Warranty

- Limited lifetime warranty



www.perle.com

Perle products are constantly reviewed and updated to meet customers' needs, as such specifications and capabilities are subject to change without notice. We endeavor to keep product descriptions as current as possible; for the latest up-to-date information, please visit our web site at www.perle.com. Perle is a registered trademark of Perle Systems. All other product names and company names are trademarks of their respective holders. Copyright©Perle.