
Ŧ	<u>م</u>	п	m	0





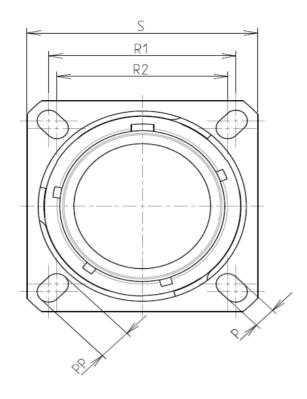

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Without Plating			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered without Souriau contacts				
-Temperature Range	-65℃ to +175℃			
-Salt Spray	: 2000 hours			

: 8.8 g ± 10%

8D 0

G

11

Х

22


Ρ


F

L А

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
РР	4.93±0.2			
R1	20.62			
R2	18.26			
S	26.2±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M15x1-6g			

Е



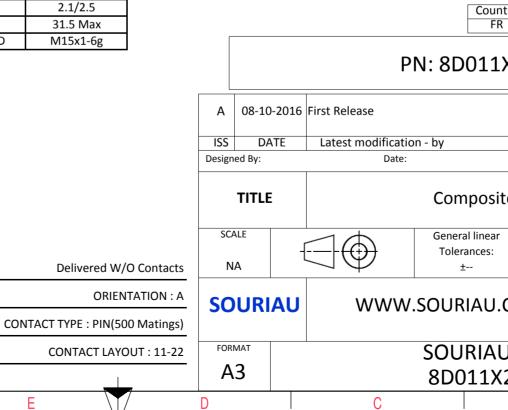

	ω		А			
					4	
AS EXA	AMPLE				3	
s which er of t indation untry FR	non-conformit ch does not co che Parties or t on, technical n Jurisc	mply wit by a thirc otice.)	th d party Control List		2	
				MOD N°		
site	customer drawing te Receptacle 8D series					
ar :		NPI	RDS / PROJECT 859			
COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					1	
	DRG N°	1		SHEET		
۸ZZ	2PAL-C B		A	1/2	J	

_						
4	(Contact Layout 22*			Â	Panel Cut SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Ctc A	4#22D 11-22 X Y 1.905 1.905			12 12	ØT.
ω	B C D	1.905 -1.905 -1.905 -1.905 -1.905 1.905				Dim ØA ØAA R1 ØT
	-					SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend
N						PN: 8D011
					A 08-10-2 ISS DATE Designed By:	016 First Release Latest modification - by Date:
<u> </u>					SCALE NA	General lineal Tolerances:
	Н	G	F	E T	FORMAT A3 D	SOURIAU SOURIA 8D011> C
	Н	G	F	E E	NA SOURIA FORMAT A3	U WWW.SOURIA SOUR 8D01

Т

ш

т

G

0

