



MAX Adapter

State-of-the-art Cellular Modem at a breakthrough price point



Built to Last

Sturdy industrial-strength designed for continuous high-traffic operation.



Portable

The light and sleek enclosure offers portability in the palm of your hands.



Compatible with 5G

Meet the ever increasing connectivity needs with the MAX Adapter 5G.



Stay Connected


With two SIM slots, the MAX Adapter always has a way to connect.



SpeedFusion Connect LTE/5G

With a built-in eSIM, achieving on-demand data to minimize data wastage and optimize your connectivity is simple. Do not settle for less, choose SpeedFusion Connect LTE/5G.

[→ Learn more](#)

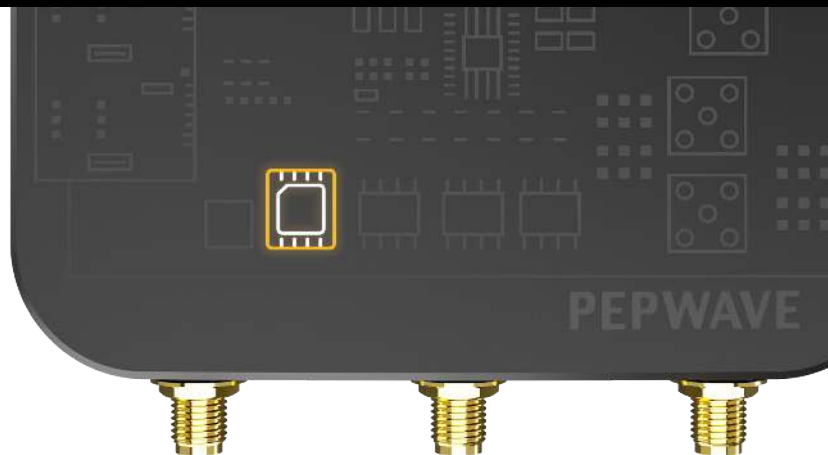

Connect with

Peplink Products

Protect and reinforce products[^] with a USB port and make it a 5G/LTE WAN.



Windows & Linux* Devices

Providing 5G/LTE connectivity for Windows and Linux devices on-the-go.



Non-Peplink Devices

Place anywhere to optimize cellular reception, reduce truck rolls, expand infrastructure, and maximize uptime for businesses that require always-on connectivity.



[^] For compatible models, please refer to the MAX Adapter [product page](#).

* For users on the Linux, please refer to our MAX Adapter [user manual](#) to set up.



1x 5G Modem

Specifications

Cellular WAN Interfaces	Single 5G Modem	Operating Temperature	-40° – 149°F / -40° – 65°C
Redundant SIM Slot	Yes	Humidity	15% – 95% (non-condensing)
Downlink/ Uplink Datarate	5G: 4 Gbps / 700 Mbps LTE CAT-20: 2 Gbps / 150 Mbps	Warranty	1-Year Limited Warranty
Antenna Connectors	4x SMA Cellular	Certifications	FCC, CE, IC
Power Input	5V USB-C	Package Content	MAX Adapter 5G, 4x LTE/5G LTE Antennas (ACW-235), USB-C Female to USB-A Male Adapter, USB-C Power Cable
Power Consumption	5W (nominal), 8W (max.)		
Dimensions	3.9 x 2.8 x 0.7 inches / 100 x 71 x 18.4 mm		
Weight	120g		

Ordering Information

Product Code	Carrier / Category	5G Bands	LTE Bands
MAX-ADP-5GH-T	Global / 5G <small>US Carrier Certifications: AT&T, T-Mobile, US Cellular, Verizon (C-Band), FirstNet</small>	5G (NSA) Sub 6Ghz: n1, n2, n3, n5, n28, n41, n66, n71, n77, n78, n79	B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B17, B18, B19, B20, B25, B26, B28, B29, B30, B32, B34, B38, B39, B40, B41, B42, B46, B48, B66, B71



Specifications

Cellular WAN Interfaces	Single LTE Modem	Operating Temperature	-40° – 149°F / -40° – 65°C
Redundant SIM Slot	Yes	Humidity	15% – 95% (non-condensing)
Downlink/ Uplink Datarate	CAT-12: 600 Mbps / 150 Mbps CAT-6: 300Mbps / 50Mbps	Warranty	1-Year Limited Warranty
Antenna Connectors	2x SMA Cellular, 1x SMA GPS	Certifications	FCC, IC
Power Input	5V USB-C	Package Content	MAX Adapter, 2x LTE Antennas (ACW-813), USB-C Female to USB-A Male Adapter, USB-C Power Cable
Power Consumption	5W (nominal), 8W (max.)		
Dimensions	3.9 x 2.8 x 0.7 inches / 100 x 71 x 18.4 mm		
Weight	120g		

Ordering Information

Product Code	Carrier / Category	LTE Bands	3G Bands
MAX-ADP-LTEA-K-T	Global CAT-12	B1, B2, B3, B4, B5, B7, B8, B9, B12, B13, B18, B19, B20, B26, B28, B29, B30, B32, B41, B42, B43, B46, B48, B66	HSPA+: B1, B2, B4, B5, B6, B8, B9, B19
MAX-ADP-LTEA-R-T	America CAT-12 US Carrier Certifications: AT&T, Verizon, FirstNet	B1, B2, B3, B4, B5, B7, B8, B9, B12, B13, B14, B18, B19, B20, B26, B29, B30, B32, B41, B42, B43, B46, B48, B66	HSPA+: B1, B2, B4, B5, B6, B8, B9, B19
MAX-ADP-LTEA-W-T	Global CAT-6	B1, B2, B3, B4, B5, B7, B8 , B12, B13, B20, B25, B26, B29, B30, B41	WCDMA/HSPA+/DC-HSPA+: B1, B2, B3, B4, B5, B8

Accessories

Product Code	Description
ACW-232	GPS Antenna